




TALEXmodule SPOT P310-3 EM TALEXmodule SPOT

Product description

- Spotlights
- Downlights
- High-flux LED module
- Narrow colour temperature tolerance band
- Lifetime up to 50,000 hours
- Compact design
- Excellent thermal management^①
- NTC for temperature control
- High-power LED in chip-on-board technology
- Beam characteristic: 140°
- Uniform distribution of light
- Fixing holes for M3 screws
- Connection: Cable 300 mm
- Built-in LED module
- Cooling required

Technical data

Beam characteristic	140°
Ambient temperature t_a	-30 ... +55 °C
Typ. t_c point	65 °C
Weight	0.015 kg
Risk group (EN 62471:2008)	0

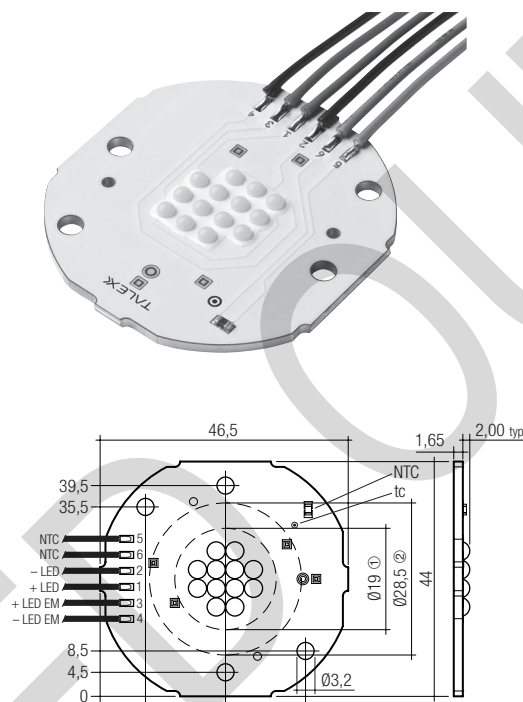

- ① Minimal reflector diameter
② Maximum reflector diameter

Ordering data

Colour temperature	Type	Article number
3,000 K	LED P310-3 EM 3000K 47x44	89601431
4,000 K	LED P310-3 EM 4000K 47x44	89601432

Packaging: 20 pieces/packaging, 360 pieces/carton

Standards, page 3

Colour temperatures and tolerances, page 6

Specific technical data

Type	Photometric code	Typ. luminous flux at 350 mA ^{② ③ ④}	Typ. luminous flux at 700 mA ^{② ③ ④}	Typ. forward voltage ^{② ③}	Power consumption module	Typ. Efficacy	Colour rendering index CRI
Normal operation							
LED P310-3 EM 3000K 47x44	830/4x9	900 lm	1,500 lm	38.4 V	13.4 W	68 lm/W	> 80
LED P310-3 EM 4000K 47x44	840/4x9	1,000 lm	1,680 lm	38.4 V	13.4 W	75 lm/W	> 80
Emergency operation – 350 mA							
LED P310-3 EM 3000K 47x44	830/4x9	150 lm	–	6,2 V	2.2 W	68 lm/W	> 80
LED P310-3 EM 4000K 47x44	840/4x9	160 lm	–	6,2 V	2.2 W	75 lm/W	> 80

All values for $t_a = 25$ °C, $t_c = 65$ °C.

^① If the maximum temperature limits are exceeded, the life of the module will be greatly reduced or the module may be damaged.

The temperature of the TALEXmodule SPOT at the t_c point in the thermally stable state by mean of a temperature sensor or temperature-sensitive sticker as per EN 60598-1. For the precise position of the t_c point see the drawing above.

^② At $t_c = 65$ °C.

^③ Tolerance range for optical and electrical data: ± 15 %.

^④ Max. permissible surge current: 3 A, duration max. 10 μ s.


Converter / controls matrix – TALEXmodule SPOT P310-3 EM in normal operation

Converter REMOTE LCI											Controls IN-BUILT					
Type	LCAI 15 W 350 mA one4all	LCAI 30 W 700 mA one4all	LCI 15 W 350 mA	LCI 30 W 700 mA	LCCI 16 W 350 mA	C350-2 4-Channel		C350 dim		C700 dim						
Article number	86458899	86458900	24166312	24166314	86459210	86458693		86458944		86458945						
Assignable converter											Assignable controls					
Type	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
TALEXmodule SPOT P310-3 EM	1	1	1	2	1	1	1	2	1	1	1	4	1	1	1	2

Converter matrix – TALEXmodule SPOT P310-3 EM in emergency operation

Converter for emergency operation													
Type	EM powerLED 2 W BASIC screw-fix		EM powerLED 2 W BASIC clip-fix		EM powerLED 2 W ST screw-fix		EM powerLED 2 W ST clip-fix		EM powerLED 2 W PRO EZ-3 screw-fix		EM powerLED 2 W PRO EZ-3 clip-fix		
Article number	89899859		89899866		89899861		89899868		89800030		89800032		
Assignable converter													
Type	Min.		Max.		Min.		Max.		Min.		Max.		
TALEX(module SPOT P310-3 EM	1	1	1	1	1	1	1	1	1	1	1	1	

Wiring diagram converter + Emergency device EM powerLED

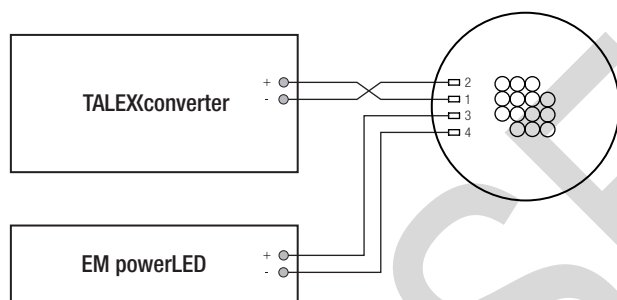

Wiring

Cable: AWG24; length 300 mm

pin	1	2	3	4	5	6
function	+	-	+	-	NTC	NTC
colour	(LED) red	(LED) black	(EM) red	(EM) black	(LED) grey	(LED) grey

ACCES-
SORIES

TALEXXaccessory Cover Spot

Product description

- Housing for LED module
- Diameter: 50 mm



Ordering data

Typ	Article number
P 310-3 EM LED cover white D50 LES 19 mm	88167487

Packaging: 20 pieces/packaging, 400 pieces/carton

EN 62031
EN 62471

Key for photometric code, e. g. 830 / 559

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit	
Code CRI	Colour temperature in Kelvin x 100	McAdams initial	McAdams after	Lumen maintenance after 25% of the lifetime (max.6000h)	
7 67 – 76			25% of the lifetime (max.6000h)	Code	Remaining lumen
8 77 – 86				7	≥ 70 %
9 87 – ≥90				8	≥ 80 %
			9	≥ 90 %	

The rated life of TALEX products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the TALEX module SPOT will be greatly reduced or the TALEX module SPOT may be destroyed.

Tridonic's excellent thermal design for the TALEX module SPOT products provides the lowest thermal resistance and therefore allowing new compact designs without sacrificing quality, safety and life time.


The temperature at the reference point is crucial for the light output and life time of a TALEX product.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The fixing/cooling surface must be cleaned before installing the TALEX modules to remove all dirt, dust and grease.

The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at:
<http://www.tridonic.com/com/en/technical-docs.asp>

The details of the 220 k Ω NTC (order number B57431V2223J062) you can find in the data sheet of the manufacturer AVX (Nr. NB12Q00224).

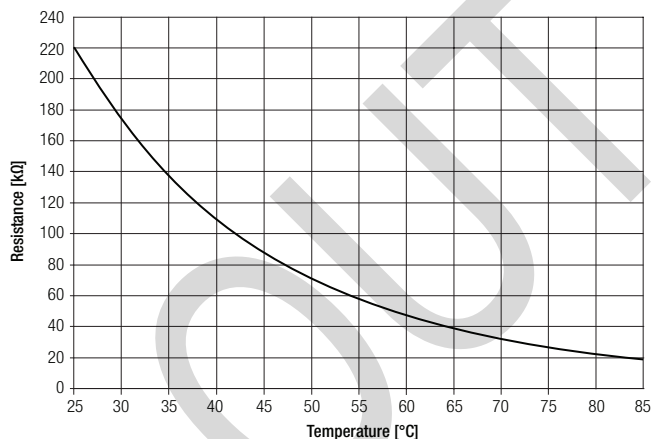


ta	tc	R _{th, hs-a}
25 °C	65 °C	4.36 K/W
30 °C	65 °C	3.79 K/W
40 °C	65 °C	2.66 K/W
50 °C	65 °C	1.53 K/W

TALEXmodule SPOT P310-3 EM, 700 mA		
ta	tc	R _{th, hs-a}
25 °C	65 °C	2.09 K/W
30 °C	65 °C	1.81 K/W
40 °C	65 °C	1.24 K/W
50 °C	65 °C	0.68 K/W

The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. A thermal connection between TALEXmodule SPOT and heat sink with heat-conducting paste or heat conducting adhesive film is absolutely necessary.

storage temperature	-30–85 °C
operating temperature	-30–55 °C
tc max. (at typ. current)	85 °C



Matrix temperature

t(soldering time) for the modules

Temperature	Max. time without heat sink	Max. time with optimized heat sink
330 °C	15 s	–
340 °C	12 s	–
350 °C	10 s	–
360 °C	5 s	15 s
370 °C	3 s	12 s
380 °C	2 s	10 s
390 °C	1 s	5 s

The values apply for soldering without heat sink. To reduce the duration of soldering it is recommended to pre-heat the module at t_a max., e.g. on a plate.

Lifetime

t_c temperature in °C	luminous flux in %	lifetime in h
25	80	60,000
	70	81,000
	50	132,000
45	80	44,000
	70	64,000
	50	110,000
65	80	32,000
	70	50,000
	50	91,000
75	80	25,000
	70	41,000
	50	81,000

Electrical supply/choice of converter

TALEXmodule SPOT from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a converter which complies with the relevant standards. The use of TALEX converters from Tridonic in combination with TALEXmodule SPOT guarantees the necessary protection for safe and reliable operation.

If a converter other than Tridonic TALEXconverter is used, it must provide the following protection:


- Short-circuit protection
- Overload protection
- Overtemperature protection





TALEXmodule SPOT P310-3 EM must be supplied by a constant current converter. Operation with a constant voltage converter will lead to an irreversible damage of the module.

Wrong polarity can damage the TALEXmodule SPOT P310-3 EM.


Relative forward voltage and relative luminous flux in normal operation / in emergency operation

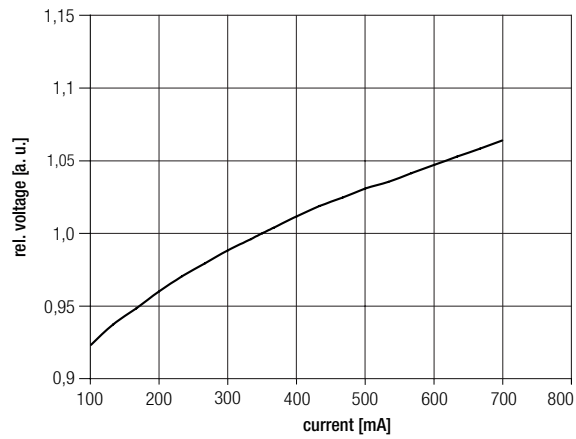

— Relative forward voltage at $T_c = 65\text{ °C}$

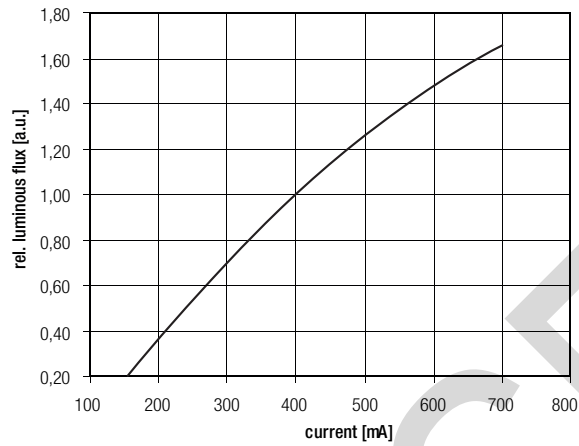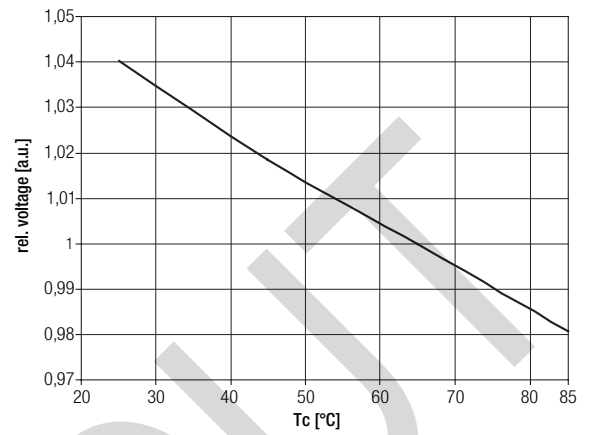

— Relative luminous flux at $T_c = 65\text{ °C}$

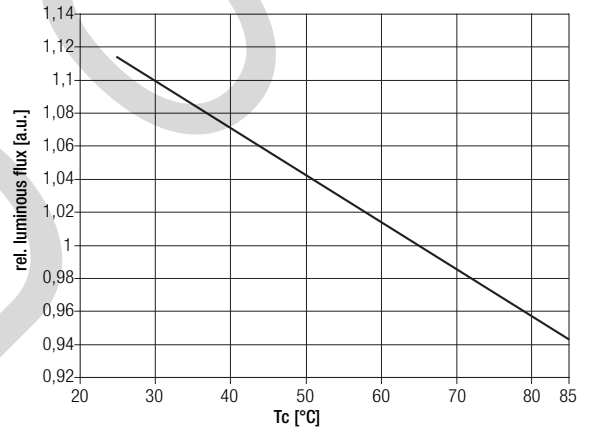


The diagrams based on statistic values.
The real values can be different.

Optical characteristics TALEXmodule SPOT P310-3 EM

The optical design of the TALEXmodule SPOT product line ensures optimum homogeneity for the light distribution.

TALEXmodule SPOT P310-3 EM 140°: Light distribution

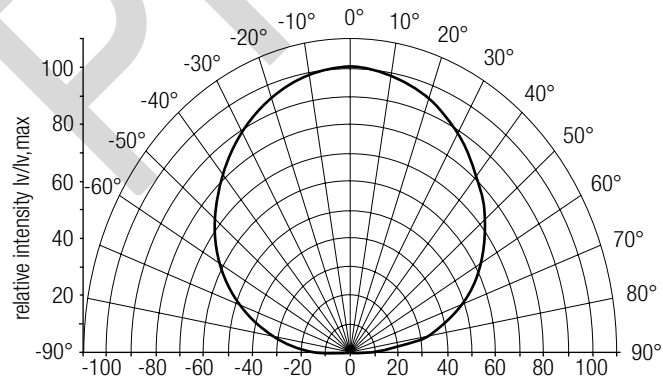


Coordinates and tolerances according to CIE 1964


The specified colour coordinates are measured by a current impulse of 350 mA and a duration of 100 ms.
The ambient temperature of the measurement is $t_a = 25\text{ °C}$.
The measurement tolerance of the colour coordinates are ± 0.01 .

3,000 K

	x0	y0
Centre	0,4460	0,3990

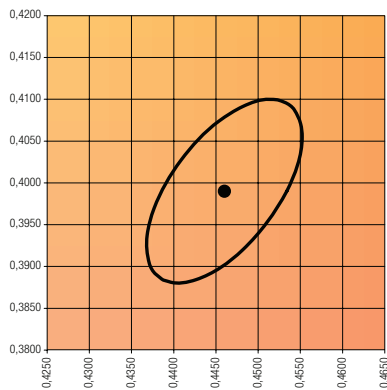


MacAdam ellipse: 4SDCM

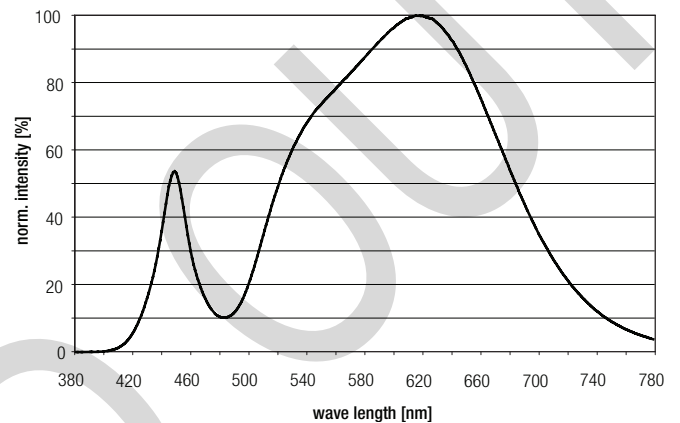

4,000 K

	x0	y0
Centre	0,3860	0,3780

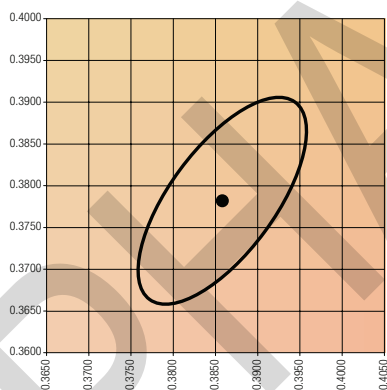

MacAdam ellipse: 4SDCM

