

#### EM converterLED BASIC NiCd/NiMH 250 V

BASIC series

#### Product description


- Emergency lighting LED driver for manual testing
- For self-contained emergency lighting
- For LED modules with a forward voltage of 50 – 250 V
- Low profile casing (21 x 30 mm cross-section)
- For luminaire installation
- Nominal lifetime up to 100,000 h
- 5 years guarantee (conditions at [www.tridonic.com](http://www.tridonic.com))

#### Properties

- Non maintained operation
- 1 or 3 h rated duration
- Operating time selectable with plug (duration link)
- Compatible with all dimmable and non-dimmable constant current LED driver (see chapter 5.4)
- 3-pole technology: 2-pole LED module changeover and delayed power switching for the LED driver
- Automatic shutdown of output if LED load is out of range
- Constant power output
- Maximum light output for all LED modules
- Electronic charge system
- Deep discharge protection
- Short-circuit-proof battery connection
- Polarity reversal protection for battery

#### Batteries

- High-temperature cells
- NiCd or NiMH batteries
- D, Cs or LA cells
- 4-year design life
- 1-year guarantee
- For battery compatibility refer to chapter 7.1

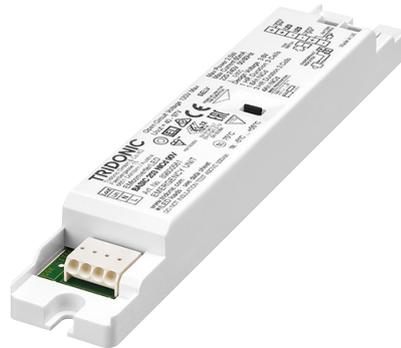

**Standards**, page 5

**Wiring diagrams and installation examples**, page 6




## EM converterLED BASIC NiCd/NiMH 250 V

### BASIC series

#### Technical data

Rated supply voltage	220 – 240 V
Mains frequency	50 / 60 Hz
LED module forward voltage range	50 – 250 V
Output current	see chapter 5.3
Time to light	< 0.25 s from detection of emergency event
Overvoltage protection	320 V (for 48 h)
U-OUT (including open- / short-circuit and double load)	280 V
Max. open circuit voltage	280 V
Battery charging time	24 h <sup>2)</sup>
Ambient temperature range ta	-5 ... + 55 °C
Max. casing temperature tc	75 °C
Mains voltage changeover threshold	according to EN 60598-2-22
Mains surge capability (between L – N)	1 kV
Mains surge capability (between L/N – PE)	2 kV
Type of protection	IP20
Lifetime	up to 100,000 h
Guarantee (conditions at www.tridonic.com)	5 years
Dimensions LxWxH	179 x 30 x 21 mm

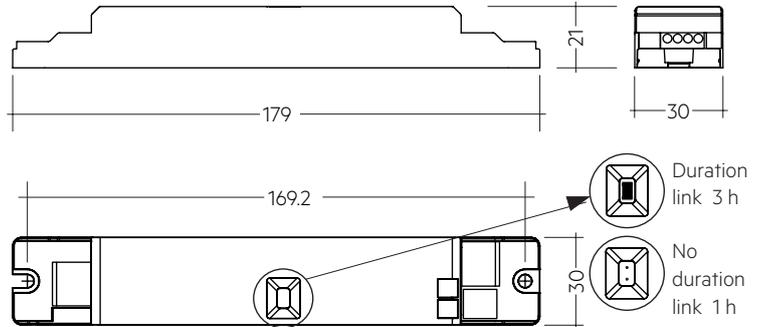

Note: LED driver supplied with duration link in 3 hours position. Remove duration link for 1 hour duration. Duration link must be set before battery and mains connection.

#### Ordering data

Type <sup>1)</sup>	Article number	Rated duration	Number of cells	Packaging carton	Packaging pallet	Weight per pc.
<b>EM converterLED BASIC 203 NiCd/NiMH 250V</b>	<b>89800574</b>	1/3 h	3	10 pc(s).	1,600 pc(s).	0.065 kg
<b>EM converterLED BASIC 204 NiCd/NiMH 250V</b>	<b>89800563</b>	1/3 h	4	10 pc(s).	1,600 pc(s).	0.065 kg
<b>EM converterLED BASIC 205 NiCd/NiMH 250V</b>	<b>89800564</b>	1/3 h	5	10 pc(s).	1,600 pc(s).	0.065 kg

#### Specific technical data

Type <sup>1)</sup>	Rated duration	Typ. λ (at 230 V, 50 Hz)	Typ. output power	Mains current in charging operation			Rated power in charging operation		
				Initial charge	Fast recharge	Trickle charge	Initial charge	Fast recharge	Trickle charge
<b>EM converterLED BASIC 203 NiCd/NiMH 250V</b>	1 h	0.60C	2.5 W	17 mA	17 mA	15 mA	2.3 W	2.3 W	1.9 W
	3 h	0.65C	2.5 W	21 mA	21 mA	17 mA	3.2 W	3.2 W	2.3 W
<b>EM converterLED BASIC 204 NiCd/NiMH 250V</b>	1 h	0.60C	3.5 W	18 mA	18 mA	16 mA	2.4 W	2.4 W	2.1 W
	3 h	0.65C	3.5 W	22 mA	22 mA	18 mA	3.5 W	3.5 W	2.4 W
<b>EM converterLED BASIC 205 NiCd/NiMH 250V</b>	1 h	0.60C	4.5 W	19 mA	19 mA	17 mA	2.6 W	2.6 W	2.2 W
	3 h	0.65C	4.5 W	24 mA	24 mA	19 mA	3.7 W	3.7 W	2.6 W

<sup>1)</sup> EM = Emergency

<sup>2)</sup> 16 h battery charging time for 2 h emergency lighting function according to AS 2293.

<sup>3)</sup> 12 h battery charging time for 2 h emergency lighting function when used with NiCd and NiMH batteries.





ACCES-  
SORIES

### EMcLED Strain-relief set 240x43x30mm

#### Product description

- Optional strain-relief set for independent applications
- Transforms the LED driver into a fully class II compatible LED driver (e.g. ceiling installation)
- Easy and tool-free mounting to the LED driver, screwless cable-clamp channels with strain-relief (240 x 43 x 30 mm)

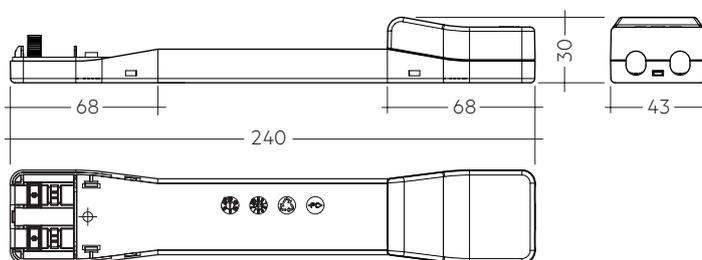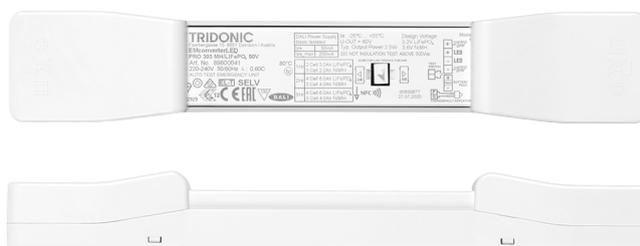

Permissible cable jacket diameter 2.2 – 9 mm

#### Ordering data

Type	Article number	Packaging, carton	Packaging, pallet	Weight per pc.
EMcLED SR	28003813	10 pc(s).	1,260 pc(s).	0.08 kg

RoHS

ACCES-  
SORIES

Test switch EM3

Product description

- For connection to the emergency lighting unit
- For checking the device function
- Plug connection
- Dielectric strength: 1,500 V AC for 60 seconds



Ordering data

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
Test switch EM 3	89899956	25 pc(s).	200 pc(s).	0.013 kg

ACCES-  
SORIES

Status indication green LED

Product description

- A green LED indicates that charging current is flowing into the battery
- Plug connection



Ordering data

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
LED EM green, 1.0 m CON	89800269	25 pc(s).	200 pc(s).	0.015 kg
LED EM green, HO 1.0 m CON	89800271	25 pc(s).	200 pc(s).	0.015 kg
LED EM green, 0.6 m CON	89800472	25 pc(s).	200 pc(s).	0.009 kg
LED EM green, HO 0.6 m CON	89800473	25 pc(s).	200 pc(s).	0.009 kg
LED EM green, 0.3 m CON	89800270	25 pc(s).	200 pc(s).	0.005 kg
LED EM green, HO 0.3 m CON	89800272	25 pc(s).	200 pc(s).	0.005 kg

## 1. Standards

- EN 61347-1
- EN 61347-2-13
- EN 61347-2-7
- EN 55015
- EN 61000-3-2
- EN 61547
- EN 60068-2-64
- EN 60068-2-29
- EN 60068-2-30
- EN 62384
- according to EN 50172
- according to EN 60598-2-22

### Meaning of marking

Double or reinforced insulation for built-in electronic LED drivers. The control gear relies upon the luminaire enclosure for protection against accidental contact with live parts.

### 1.1 Glow-wire test

according to EN 61347-1 with increased temperature of 850 °C passed.

### 1.2 Insulation and electric strength testing of luminaires

Electronic LED-drivers can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an insulation test with 500 V<sub>dc</sub> for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal. The insulation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1,500 V<sub>AC</sub> (or 1,414 x 1,500 V<sub>DC</sub>). To avoid damage to the electronic devices this test **must not be conducted**.

## 2. Thermal details and lifetime

### 2.1 Lifetime

Average lifetime 50,000 hours under rated conditions with a failure rate of less than 10 %. Average failure rate of 0.2 % per 1,000 operating hours.

#### Expected lifetime

<b>EM converterLED BASIC 203</b> <b>NiCd/NiMH 250V</b>	t <sub>c</sub>	65 °C	70 °C	75 °C
	lifetime	> 100,000 h	73,000 h	51,000 h
<b>EM converterLED BASIC 204</b> <b>NiCd/NiMH 250V</b>	t <sub>c</sub>	65 °C	70 °C	75 °C
	lifetime	> 100,000 h	87,000 h	61,000 h
<b>EM converterLED BASIC 205</b> <b>NiCd/NiMH 250V</b>	t <sub>c</sub>	65 °C	70 °C	75 °C
	lifetime	> 100,000 h	79,000 h	56,000 h

The emergency lighting LED driver is designed for a lifetime stated above under reference conditions and with a failure probability of less than 10 %.

The relation of t<sub>c</sub> to t<sub>a</sub> temperature depends also on the luminaire design. If the measured t<sub>c</sub> temperature is approx. 5 K below t<sub>c</sub> max., t<sub>a</sub> temperature should be checked and eventually critical components (e.g. ELCAP) measured. Detailed information on request.

## 3. Installation / Wiring


### 3.1 Wiring diagram

One or more LED modules with a total forward voltage of 50 to 250 V can be connected to the EM converterLED 250V module. These LED module(s), marked with "Emergency" are operated in emergency mode from the associated battery. In normal mains mode all LED modules are operated by the LED driver from the mains supply.


Use of the test switch:

For checking the device function press the test switch for a minimum of 3 seconds.


**EM converterLED BASIC with one LED module for non-maintained emergency operation**

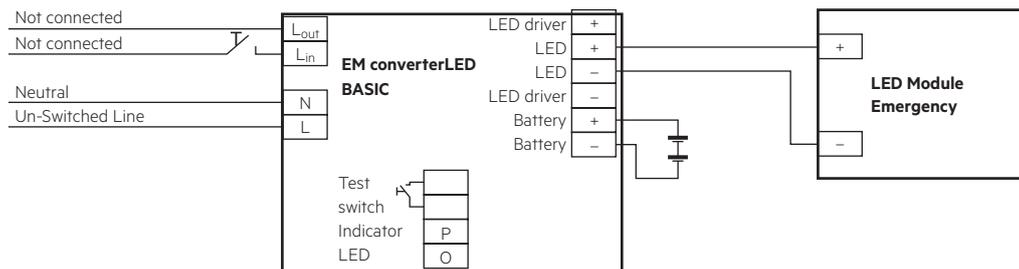

**EM converterLED BASIC with a standard LED driver and one LED module for mains and emergency operation**

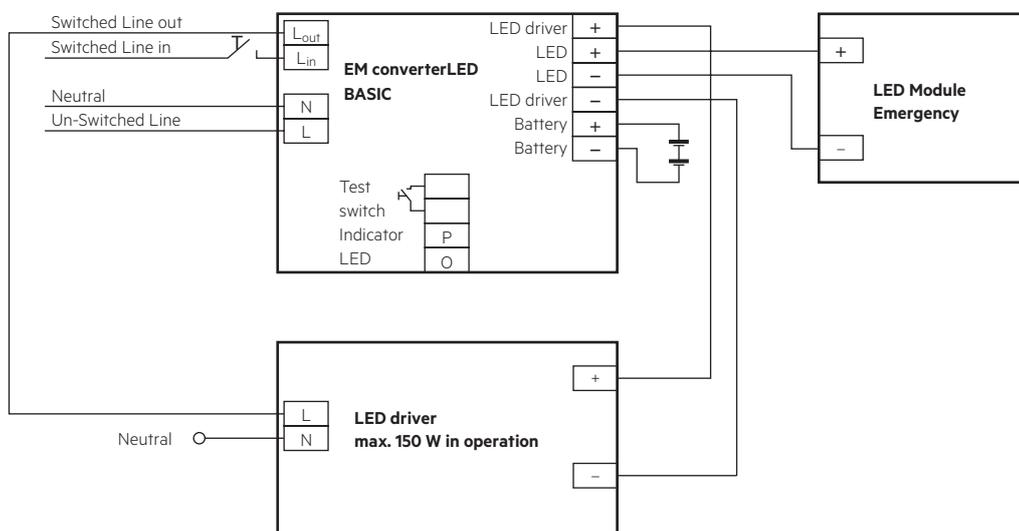


**EM converterLED BASIC with a standard LED driver and series operation of LED modules**

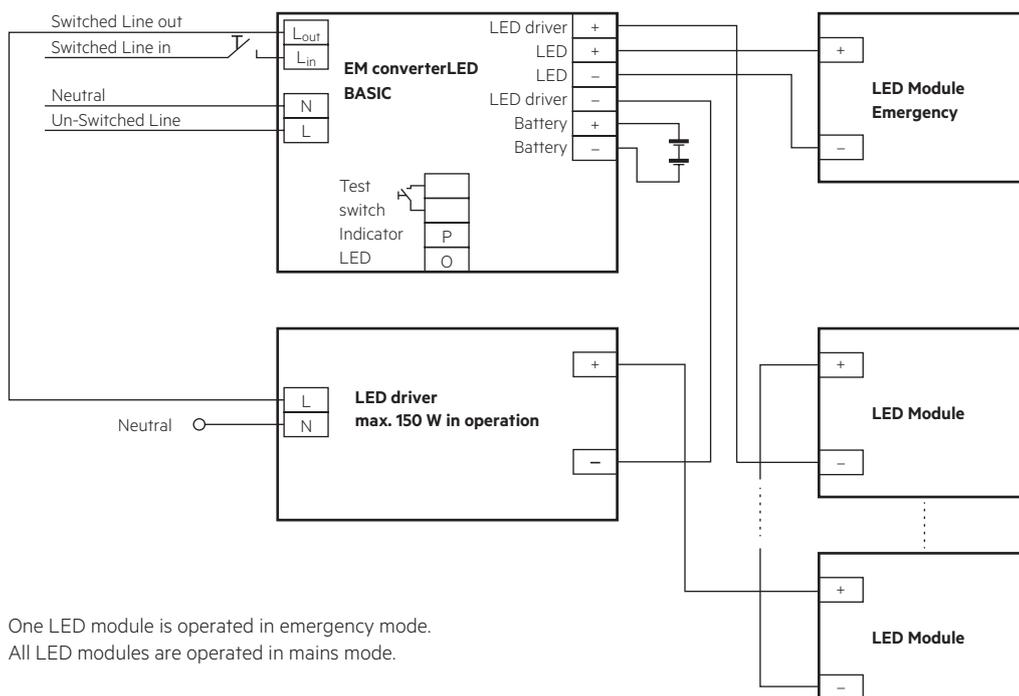


One LED module is operated in emergency mode.  
All LED modules are operated in mains mode.


**EM converterLED BASIC with a standard LED driver and series operation of LED modules**

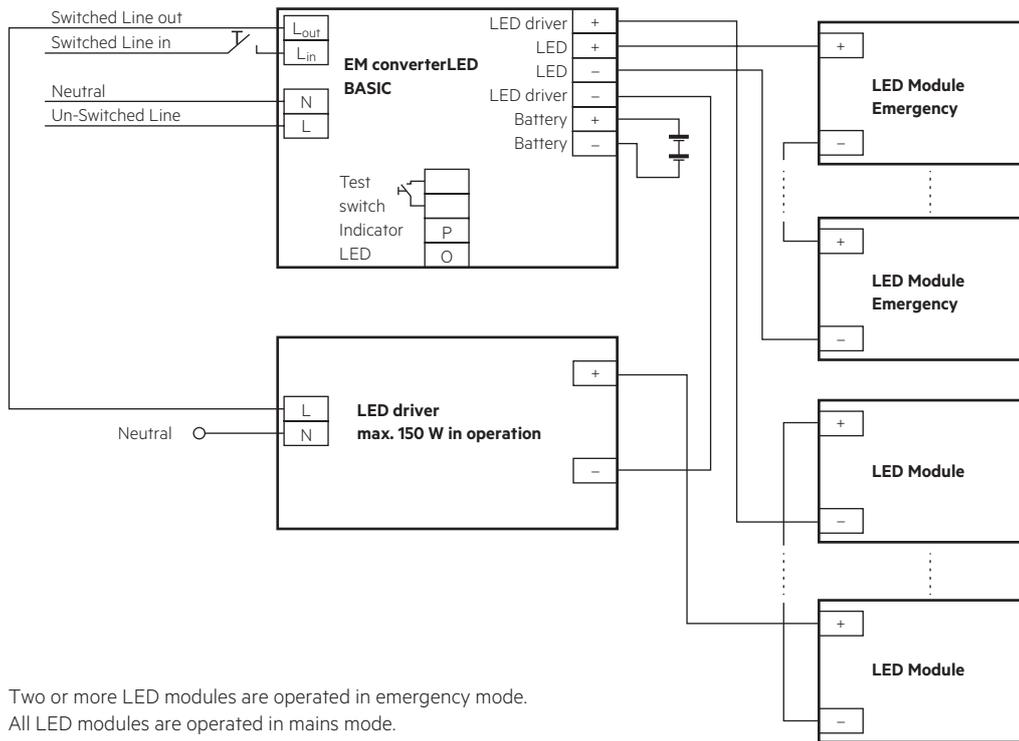

**EM converterLED BASIC with a standard LED driver and parallel operation of LED modules**

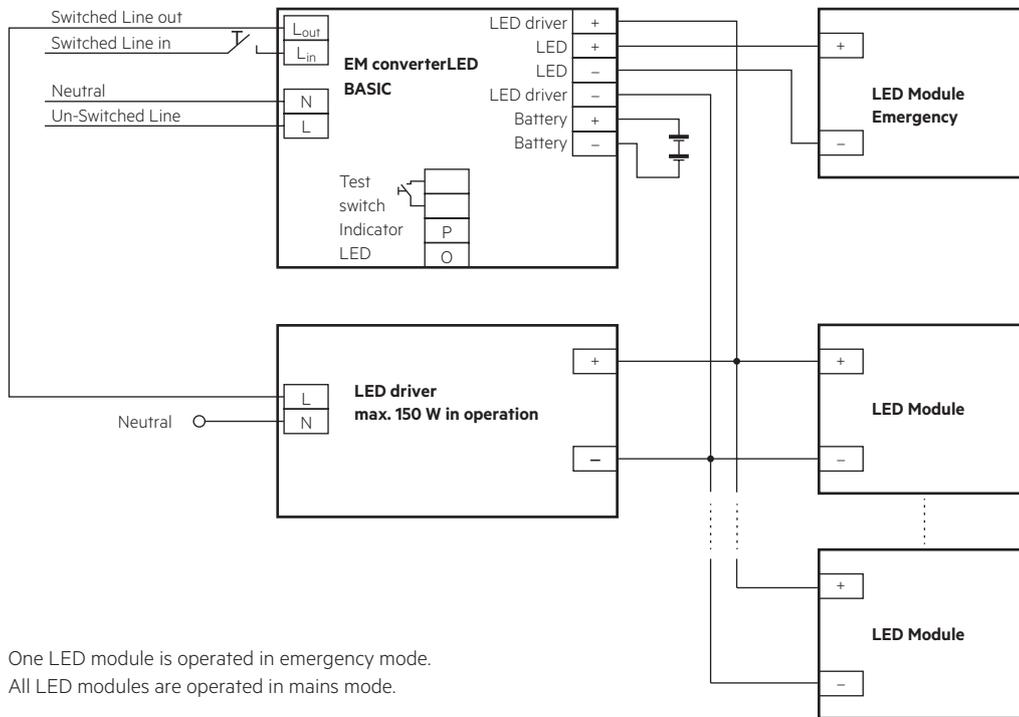

**EM converterLED BASIC with a standard LED driver and parallel operation of LED modules**

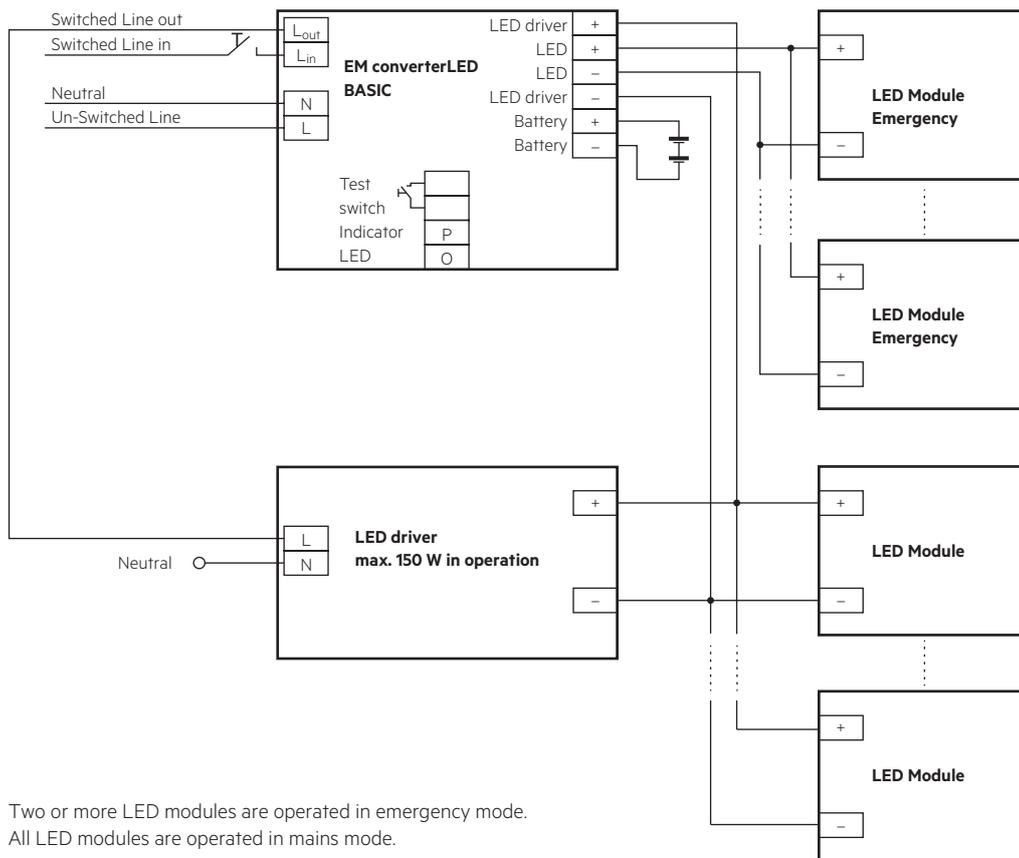


Two or more LED modules are operated in emergency mode.  
All LED modules are operated in mains mode.


**3.2 Wiring type and cross section**

Solid wire with a cross section of 0.5 – 1.5 mm<sup>2</sup>. Strip 8 – 9 mm of insulation from the cables to ensure perfect operation of terminals.

Wiring: LED module/LED driver/supply



**3.3 Loose wiring**



Loosen wire through twisting and pulling or using a Ø 1 mm release tool

**3.4 Wiring guidelines**

- The output to the LED is DC but has high frequency content, which should be considered for good EMC compliance.
- Separate LED leads from the mains and DALI connections and wiring for good EMC performance.
- Maximum lead length on the LED terminals is 3 m. For a good EMC performance keep the LED wiring as short as possible.
- Route the secondary wires (LED module) in parallel to ensure good EMC performance.
- Maximum lead length for the Test switch and Indicator LED connection is 1 m. Separate the test switch and Indicator LED wiring from the LED leads to prevent noise coupling.
- Battery leads are specified with 0.5 mm cross section and a length of 1.3 m
- Protect the wiring against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.) to avoid the damage of the control gear.

To ensure that a luminaire containing LED emergency units complies with EN 55015 for radio frequency conducted interference in both normal and emergency mode it is essential to follow good practice in the wiring layout.

Within the luminaire route the switched and unswitched 50 Hz supply wiring as short as possible and keep it as far away as possible from the LED leads. Through wiring may affect the EMC performance of the luminaire.

Do not exceed the max. length of LED leads to the LED module. Note that the length of the EM converterLED leads to the LED module is added to the length of the leads from the LED driver to the EM converterLED module when considering the max. permitted lead length of the LED driver.

### 3.5 Maximum lead length

LED	3 m (6 m loop)
Status indication LED	1 m
Batteries	1.3 m

### 3.6 Use of different phases

The use of different phases for switched line and unswitched line is allowed. When using different phases, the unswitched line must fail if the switched line fails. This is required to assure correct switching into emergency mode. It can be realised with a relay.

## 4. Mechanical values

### 4.1 Housing properties

- Casing manufactured from polycarbonate.
- Type of protection: IP20
- Max. torque at the mounting screws: 0.8 Nm

### 4.2 Mechanical data accessories

LED status indicator

- Green
- Mounting hole 6.5 mm diameter, 1 – 1.6 thickness
- Lead length 0.3 m / 0.6 m / 1.0 m
- Insulation rating: 90 °C
- Plug connection

Test switch

- Mounting hole 7.0 mm diameter
- Lead length 0.55 m
- Plug connection

## 5. Electrical values

### 5.1 Maximum loading of automatic circuit breakers

Automatic circuit breaker type	B10	B13	B16	B20	C10	C13	C16	C20	Inrush current	
Installation Ø	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	I <sub>max</sub>	time
<b>EM converterLED BASIC 203 NiCd/NiMH 250V</b>	90	130	130	130	180	260	260	260	10 A	120 µs
<b>EM converterLED BASIC 204 NiCd/NiMH 250V</b>	90	130	130	130	180	260	260	260	10 A	120 µs
<b>EM converterLED BASIC 205 NiCd/NiMH 250V</b>	90	130	130	130	180	260	260	260	10 A	120 µs

### 5.2 Insulation matrix

	Mains	Switched Live	Battery, LED, Test switch, Indicator LED	LED driver
Mains	–	•	••	•
Switched Live	•	–	••	•
Battery, LED, Test switch, Indicator LED	••	••	–	–
LED driver	•	•	–	–

• Represents basic insulation

•• Represents double or reinforced insulation

When using a non-SELV LED driver insulate the battery, LED, test switch and indicator LED in the luminaire according to the U-OUT rating of the LED driver.

Battery leads

- All NiCd and NiMH 2 Ah:
  - Quantity: 1 red and 1 black
  - Length: 1.3 m
  - Wire type: 0.5 mm<sup>2</sup> solid conductor
  - Insulation rating: 90 °C
- NiMH 4 Ah:
  - Quantity: 1 red and 1 black lead with plug-in connection suitable for the plug-in connection of the battery
  - Total length: 1,000mm (100 mm on battery side / 900 mm on device side)
  - Wire type: 0.5mm<sup>2</sup> solid conductor
  - Insulation temperature rating: 90°C

Battery end termination

- All NiCd and NiMH 2 Ah: push on 4.8 mm receptacle to suit battery spade fitted with insulating cover
- NiMH 4 Ah: lead with connector

Module end termination

8.0 mm stripped insulation

Two-piece batteries



- All NiCd and NiMH 2 Ah: are supplied with a 200 mm lead with 4.8 mm receptacle at each end and insulating covers to connect the separate sticks together.
- NiMH 4 Ah: are supplied with a 100mm firmly welded lead to connect the separate sticks together. A lockable plug connection is used to connect the battery on the battery side. On the device side the cable has a strip length of 8 mm from factory

5.3 Typ. LED current/voltage characteristics


The LED current in emergency mode is automatically adjusted by the EM converterLED module based on the total forward voltage of the LED modules connected and the associated battery. The start of the LED in emergency mode does not result in a current peak.

EM converterLED BASIC 203 NiCd/NiMH 250V  
 Article number: 89800574  
 3.6 V battery voltage  
 850 – 960 mA battery discharge current (tolerance)

EM converterLED BASIC 204 NiCd/NiMH 250V  
 Article number: 89800563  
 4.8 V battery voltage  
 850 – 960 mA battery discharge current (tolerance)

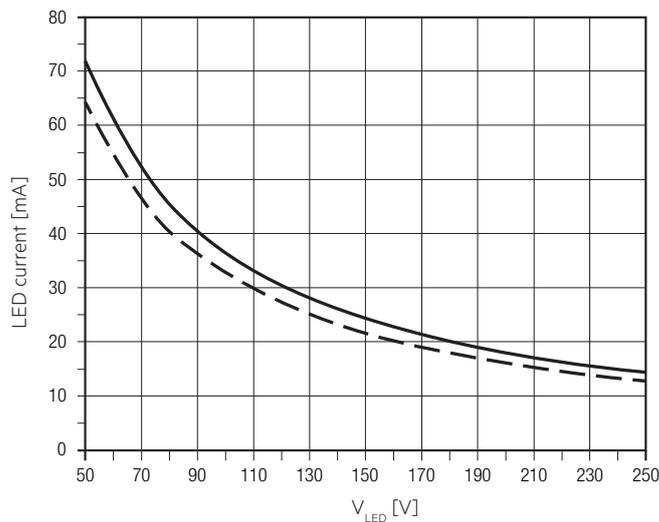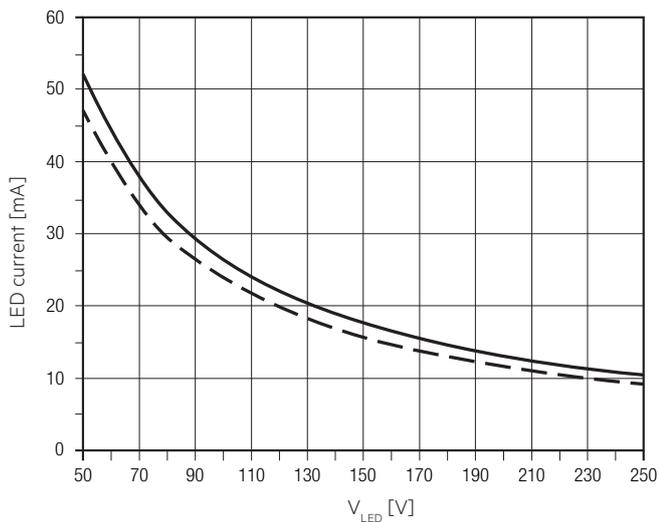

EM converterLED BASIC 205 NiCd/NiMH 250V  
 Article number: 89800564  
 6.0 V battery voltage  
 850 – 960 mA battery discharge current (tolerance)

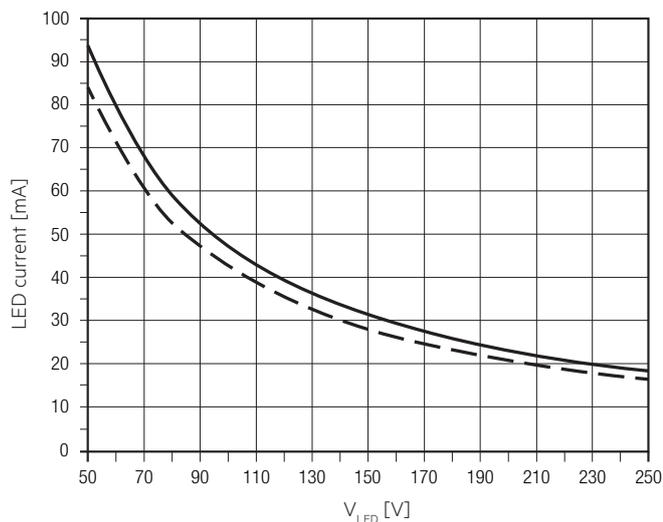

--- LED current at nominal battery voltage and min. battery discharge current  
 — LED current at nominal battery voltage and max. battery discharge current

## 5.4 LED driver compatibility

The EM converterLED emergency unit use 3 pole technology and is compatible with most LED drivers on the market, however it is important to check that the rating of the LED driver does not exceed the values specified below:

- The max. allowed output current rating of the associated LED driver is 2 A eff (current rating of the terminals of EM converterLED) and 2.4 A peak (current rating of switching relays of EM converterLED)
- The max. allowed inrush current rating of the associated LED driver is 60 A peak for 1 ms or 84 A for 255  $\mu$ s (inrush current rating of switching relay of EM converterLED)
- The max. allowed output voltage (U-OUT) of the associated LED driver applied to the EM converterLED output is 450 V (voltage withstand between adjacent contact of the single switching relay of the EM converterLED)
- The max. allowed LED load of the associated LED driver is 150 W in operation. The load must be an LED module.

Check compatibility with short function tests (duration of several seconds).

## 6. Functions

### 6.1 Duration link selection

Duration	Usage duration link
3 h	 With link
1 h	 Without link

Emergency lighting LED driver supplied with duration link in 3 hours position.

The position of the link will only be read on first power up. If it is changed afterwards both the battery and mains supply must be disconnected for 10 seconds to enable the EM converterLED to read the new link position on reconnection of the battery and mains. It will lead to a false battery failure indication if the link is changed after installation without this reset.

### 6.2 Status indication LED

System status is indicated by a green LED.

Note:

The status indication LED switches off if the battery does not reach the full capacity (3.6V battery voltage) within 20 – 24 hours.

If this occurs disconnect the mains voltage and operate the device in emergency mode for approximately one hour. Afterwards apply the mains voltage again and recharge the battery for 24 hours.

If the failure occurs again replace the battery.

## 7. Battery data

### 7.1 Battery selection

#### EM converterLED BASIC, 1 / 3 h

		Type	EM converterLED BASIC 203 NiCd/NiMH 250V	EM converterLED BASIC 204 NiCd/NiMH 250V	EM converterLED BASIC 205 NiCd/NiMH 250V			
		Article no.	89800574		89800563	89800564		
		Cells	3 cells		4 cells	5 cells		
		Duration	1 h	3 h	1 h	3 h	1 h	3 h
Technology and capacity	Design	Number of cells	Type	Article no.	Assignable batteries			
NiCd 4 Ah D cells	stick	1 x 3	Accu-NiCd 3A 55	28002773		•		
	stick	1 x 4	Accu-NiCd 4A 55	89800089			•	
	stick	1 x 5	Accu-NiCd 5A 55	28002774				•
	side by side	3 x 1	Accu-NiCd 3B 55	89800384		•		
	side by side	4 x 1	Accu-NiCd 4B 55	89800385			•	
	stick + stick	2 + 2	Accu-NiCd 4C 55	28002775			•	
	stick + stick	3 + 2	Accu-NiCd 5C 55	89800090				•
	remote box	1 x 3	Pack-NiCd 3D CON	89800389		•		
	remote box	1 x 4	Pack-NiCd 4D CON	89800390			•	
remote box	1 x 5	Pack-NiCd 5D CON	28001181				•	
NiMH 2.2 Ah Cs cells	stick	1 x 3	Accu-NiMH 3A	28002088	•			
	stick	1 x 4	Accu-NiMH 4A	28002089		•		
	stick	1 x 5	Accu-NiMH 5A	28002090			•	
	side by side	5 x 1	Accu-NiMH 5B	28002093			•	
	remote box	1 x 3	Pack-NiMH 2.2Ah 3 CON	28001898	•			
	remote box	1 x 4	Pack-NiMH 2.2Ah 4 CON	28001899		•		
NiMH 4 Ah LA cells	stick	1 x 3	Accu-NiMH 4Ah 3A CON	89800441		•		
	stick	1 x 4	Accu-NiMH 4Ah 4A CON	89800442			•	
	stick + stick	2 + 2	Accu-NiMH 4Ah 4C CON	89800438			•	
	stick + stick	2 + 3	Accu-NiMH 4Ah 5C CON	89800439				•
	remote box	1 x 3	Pack-NiMH 4Ah 3 CON	28001896		•		
	remote box	1 x 4	Pack-NiMH 4Ah 4 CON	28001897			•	

### 7.2 Battery charge / discharge data

#### EM converterLED BASIC, 1 / 3 h

		Type	EM converterLED BASIC 203 NiCd/NiMH 250V	EM converterLED BASIC 204 NiCd/NiMH 250V	EM converterLED BASIC 205 NiCd/NiMH 250V		
		Article no.	89800574		89800563	89800564	
		Cells	3 cells		4 cells	5 cells	
		Duration	1 h	3 h	1 h	3 h	
Battery charge time	Initial charge	24 h					
	Fast recharge	24 h					
	Trickle charge	continuously					
Charging current	Initial charge	80 – 130 mA	170 – 220 mA	80 – 130 mA	170 – 220 mA	80 – 130 mA	170 – 220 mA
	Fast recharge	80 – 130 mA	170 – 220 mA	80 – 130 mA	170 – 220 mA	80 – 130 mA	170 – 220 mA
	Trickle charge	45 – 95 mA	80 – 130 mA	45 – 95 mA	80 – 130 mA	45 – 95 mA	80 – 130 mA
Discharge current		850 – 960 mA	850 – 960 mA	850 – 960 mA	850 – 960 mA	850 – 960 mA	850 – 960 mA
Charge voltage range <sup>®</sup>		0.9 – 1.65 V per cell					
Discharge voltage range		1.65 – 0.90 V per cell					

<sup>®</sup> The battery will be charged below 0.9 V. The EM converterLED will indicate a battery fault.

The emergency lighting LED driver will recharge the battery normally after running the test of 61347-2-7 CL 22.3 (abnormal operating conditions).

**7.3 Accu-NiCd****4.2 / 4.5 Ah**

International designation	KRMU 33/62
Battery voltage/cell	1.2 V
Cell type	D
Case temperature range to ensure 4 years design life	+5 °C to +55 °C
Max. short term battery case temperature (shorter than 1 month over the battery lifetime)	70 °C
Max. number discharge cycles	12 cycles per year plus 4 cycles during comissioning
Max. storage time	12 months

**7.4 Accu-NiMH****2.2 Ah**

International designation	HRMU 23/43
Battery voltage/cell	1.2 V
Cell type	Cs
Case temperature range to ensure 4 years design life	+5 °C to +50 °C
Max. short term battery case temperature (shorter than 1 month over the battery lifetime)	70 °C
Max. number discharge cycles	4 cycles per year plus 30 cycles during comissioning
Max. storage time	12 months

**4.0 Ah**

International designation	HRMU 19/90
Battery voltage/cell	1.2 V
Cell type	LA
Case temperature range to ensure 4 years design life	+5 °C to +45 °C
Max. short term battery case temperature (shorter than 1 month over the battery lifetime)	70 °C
Max. number discharge cycles	4 cycles per year plus 30 cycles during comissioning
Max. storage time	12 months

**7.5 Accupack-NiCd****4.5 Ah**

Battery voltage/cell	1.2 V
Cell type	D
Ambient temperature range to ensure 4 years design life	+5 °C to +40 °C
tc point	+45 °C
Max. short term battery case temperature (shorter than 1 month over the battery lifetime)	70 °C
Max. number discharge cycles	4 cycles per year plus 4 cycles during comissioning
Max. storage time	6 months

**7.6 Accupack-NiMH****2.2 Ah**

Battery voltage/cell	1.2 V
Cell type	Cs
Ambient temperature range to ensure 4 years design life	+5 °C to +35 °C
tc point	+40 °C
Max. short term battery case temperature (shorter than 1 month over the battery lifetime)	70 °C
Max. number discharge cycles	4 cycles per year plus 4 cycles during comissioning
Max. storage time	12 months

**4.0 Ah**

Battery voltage/cell	1.2 V
Cell type	LAL
Ambient temperature range to ensure 4 years design life	+5 °C to +35 °C
tc point	+40 °C
Max. short term battery case temperature (shorter than 1 month over the battery lifetime)	70 °C
Max. number discharge cycles	4 cycles per year plus 4 cycles during comissioning
Max. storage time	12 months

For a higher battery temperature rating for NiMH 4 Ah refer to the EM converterLED xx MH/LiFePO4 product range.

**7.7 Wiring batteries**

To inhibit inverter operation disconnect the batteries by removing the connection at battery side.

For further informations refer to corresponding battery datasheet.

**7.8 Storage, installation and commissioning**

Relevant information about storage conditions, installation and commissioning are provided in the battery datasheets.

**8. Miscellaneous****8.1 Maximum number of switching cycles**

EM converterLEDs are tested with 50,000 mains switching cycles of the associated LED driver.

**8.2 Battery replacement**

After a battery replacement and a subsequent full charge cycle (24 h) a duration test is mandatory to prove that with the new battery the rated duration is achieved.

**8.3 Mains-connected transformers**

The EM converterLED does not contain mains-connected windings of transformers.

**8.4 Additional information**

Additional technical information at [www.tridonic.com](http://www.tridonic.com) → Technical Data

Lifetime declarations are informative and represent no warranty claim. No warranty if device was opened.