

#### EM converterLED ST 90 V

SELFTEST series

#### Product description

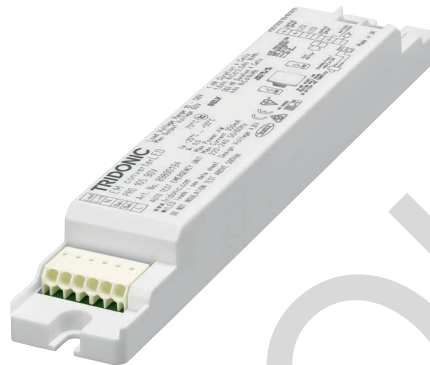
- Emergency lighting LED Driver with self-test function
- For self-contained emergency lighting
- For LED modules with a forward voltage of 40 – 97 V
- SELV for output voltage < 120 V DC
- Low profile casing (21 x 30 mm cross-section)
- Nominal life-time up to 50,000 h
- 5-year guarantee

#### Properties

- Non maintained operation
- Self-test as per IEC 62034
- 1 or 3 h rated duration
- Operating time selectable with plug (duration link)
- Compatible with all dimmable and non-dimmable constant current LED Drivers (see 5.3, LED Driver compatibility)
- 3-pole technology: 2-pole LED module changeover and delayed power switching for the LED Driver
- Automatic shutdown of output if LED load is out of range
- Constant power output
- Maximum light output for all LED modules
- Two-colour status display LED
- „Rest mode“ function
- Electronic multi-level charge system
- Intermittent charge for NiMH batteries (pulse charge)
- Deep discharge protection
- Short-circuit-proof battery connection
- Polarity reversal protection for battery
- Self-test:
  - Status of the battery
  - Status of the LED
  - Charge condition
  - Function test
  - Duration test

#### Batteries

- High-temperature cells
- NiCd or NiMH batteries
- D, Cs or LA cells
- 4-year design life
- 1-year guarantee
- For battery compatibility refer to chapter „Battery selection“



**Standards**, page 4

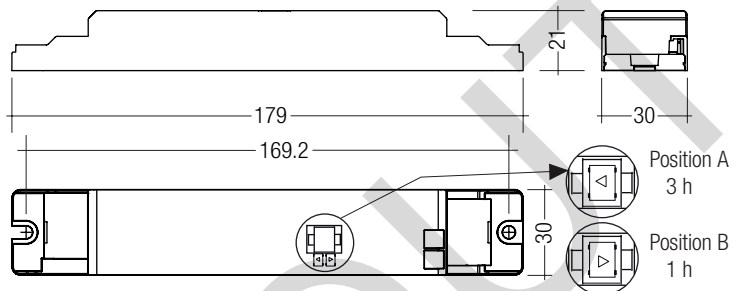
**Wiring diagrams and installation examples**, page 5

## EM converterLED ST 90 V

### SELFTEST series

#### Technical data

Rated supply voltage	220 – 240 V
Mains frequency	50 / 60 Hz
LED module forward voltage range	40 – 97 V
Output current	see page 6
Time to light	< 0.25 s from detection of emergency event
Overvoltage protection	320 V (for 1 h)
U-OUT (including open- / short-circuit and double load)	120 V
Max. open circuit voltage	120 V
Ambient temperature range $t_a$	-25 ... +55 °C
Max. casing temperature $t_c$	75 °C
Mains voltage changeover threshold	according to EN 60598-2-22
Mains surge capability (between L – N)	1 kV
Mains surge capability (between L/N – PE)	2 kV
Type of protection	IP20
Rest mode max. number of emergency units	100
Rest mode max. wiring distance	1,000 m
Functional test	Weekly 5s test
Duration test	Yearly 1 h / 3 h test
Life-time	up to 50,000 h
Dimensions LxWxH	179 x 30 x 21 mm



Note: LED Driver supplied with duration link in 3 hours position. Duration link must be set before battery and mains connection. The EM converterLED ST 135 NiCd is supplied without a duration link.

#### Ordering data

Type <sup>®</sup>	Article number	Rated duration	Number of cells	Packaging, carton	Packaging, pallet	Weight per pc.
EM converterLED ST 104 90V	89800190	1/3 h	4	10 pc(s).	1,600 pc(s).	0.08 kg
EM converterLED ST 105 90V	89800191	1/3 h	5	10 pc(s).	1,600 pc(s).	0.08 kg
EM converterLED ST 135 NiCd 90V	89800192	3 h	5	10 pc(s).	1,600 pc(s).	0.08 kg
EM converterLED ST 104 NiMH 90V	89800322	1/3 h	4	10 pc(s).	800 pc(s).	0.08 kg
EM converterLED ST 105 NiMH 90V	89800323	1/3 h	5	10 pc(s).	800 pc(s).	0.08 kg

#### Specific technical data

Type <sup>®</sup>	Rated duration	Typ. $\lambda$ (at 230 V, 50 Hz)	Typ. output power	Mains current in charging operation			Mains power in charging operation		
				Initial charge	Fast recharge	Trickle charge <sup>①</sup>	Initial charge	Fast recharge	Trickle charge <sup>①</sup>
EM converterLED ST 104 90V	1 h	0.5c	3.7 W	20 mA	25 mA	17 mA	2.5 W	3.1 W	1.7 W
	3 h	0.5c	3.7 W	27 mA	30 mA	20 mA	4.0 W	4.3 W	2.2 W
EM converterLED ST 105 90V	1 h	0.5c	4.9 W	20 mA	25 mA	17 mA	2.5 W	3.1 W	1.7 W
	3 h	0.5c	4.9 W	30 mA	30 mA	20 mA	4.5 W	4.8 W	2.5 W
EM converterLED ST 135 NiCd 90V	3 h	0.5c	1.9 W	20 mA	25 mA	17 mA	2.5 W	3.3 W	1.7 W
EM converterLED ST 104 NiMH 90V	1 h	0.5c	3.7 W	27 mA	30 mA	24 / 22 mA	2.4 W	3.1 W	1.8 / 1.5 W
	3 h	0.5c	3.7 W	34 mA	36 mA	27 / 22 mA	4.0 W	4.4 W	2.4 / 1.5 W
EM converterLED ST 105 NiMH 90V	1 h	0.5c	4.9 W	29 mA	32 mA	25 / 23 mA	2.5 W	3.4 W	1.8 / 1.5 W
	3 h	0.5c	4.9 W	36 mA	38 mA	29 / 23 mA	4.5 W	4.8 W	2.6 / 1.5 W

<sup>①</sup> In case of 2 values: Intermittent charge is used. Value 1 is for 4 min. charge on / Value 2 is for 16 min. charge off

<sup>®</sup> EM = Emergency

RoHS

ACCESSORIES

## Test switch EM3

## Product description

- For connection to the emergency lighting unit
- For checking the device function
- Plug connection



## Ordering data

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
Test switch EM 3	89899956	25 pc(s).	200 pc(s).	0.013 kg

ACCESSORIES

## Status indication bi-colour LED

## Product description

- Two-colour status display LED
- Green: system OK, red: fault
- Plug connection



## Ordering data

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
LED EM bi-colour, 1.0 m CON	89800273	25 pc(s).	200 pc(s).	0.015 kg
LED EM bi-colour, high brightness HO 1.0 m CON	89800275	25 pc(s).	200 pc(s).	0.015 kg
LED EM bi-colour, 0.6 m CON	89800474	25 pc(s).	200 pc(s).	0.005 kg
LED EM bi-colour, high brightness HO 0.6 m CON	89800475	25 pc(s).	200 pc(s).	0.005 kg
LED EM bi-colour, 0.3 m CON	89800274	25 pc(s).	200 pc(s).	0.005 kg
LED EM bi-colour, high brightness HO 0.3 m CON	89800276	25 pc(s).	200 pc(s).	0.005 kg

## 1. Standards

- EN 61347-1
- EN 61347-2-13
- EN 61347-2-7
- EN 55015
- EN 61000-3-2
- EN 61000-3-3
- EN 61547
- EN 60068-2-64
- EN 60068-2-29
- EN 60068-2-30
- EN 62384
- according to EN 50172
- according to EN 60598-2-22
- according to EN 62034

### Meaning of marking

Double or reinforced insulation for built-in electronic LED Drivers

#### 1.1 Glow-wire test

according to EN 61347-1 with increased temperature of 850 °C passed.

#### 1.2 Insulation and electric strength testing of luminaires

Electronic LED-Drivers can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an insulation test with 500 V<sub>DC</sub> for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal. The insulation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1,500 V<sub>AC</sub> (or 1,414 x 1,500 V<sub>DC</sub>). To avoid damage to the electronic devices this test **must not be conducted**.

## 2. Thermal details and life-time

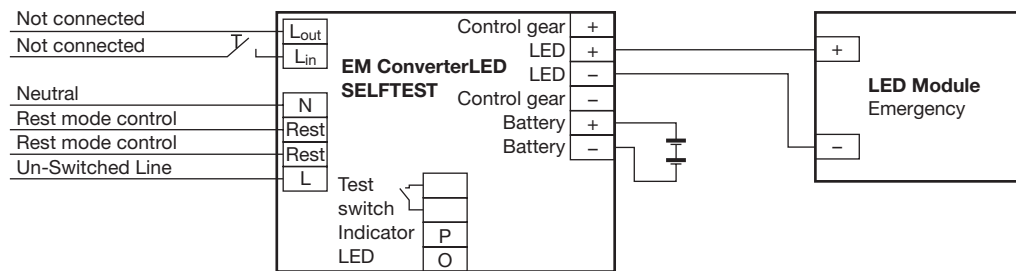
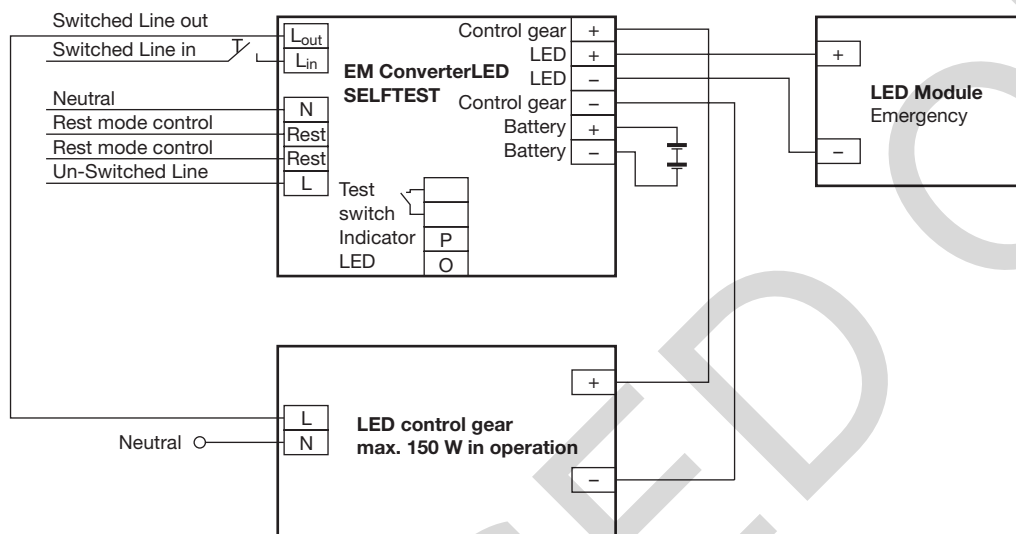
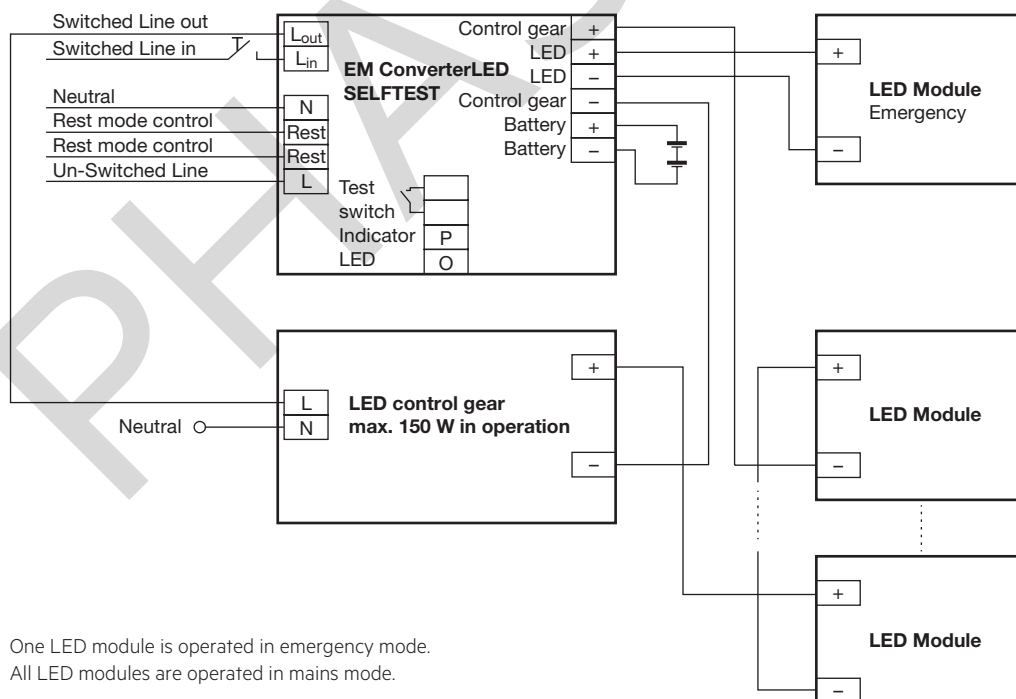
#### 2.1 Life-time

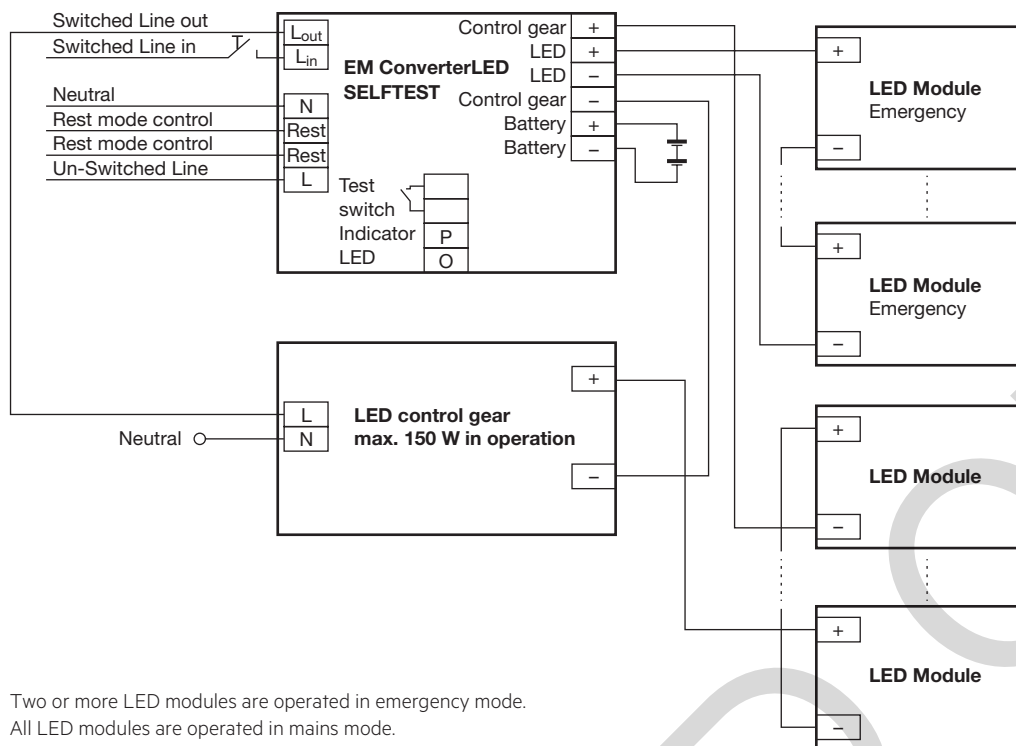
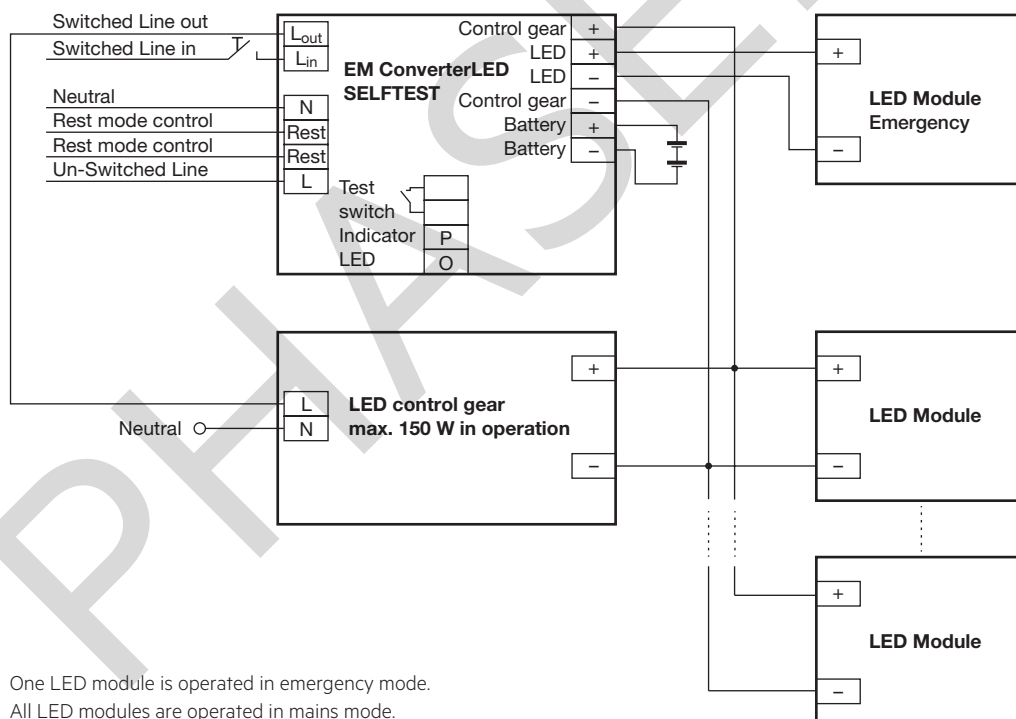
Average life-time 50,000 hours under rated conditions with a failure rate of less than 10 %. Average failure rate of 0.2 % per 1000 operating hours.

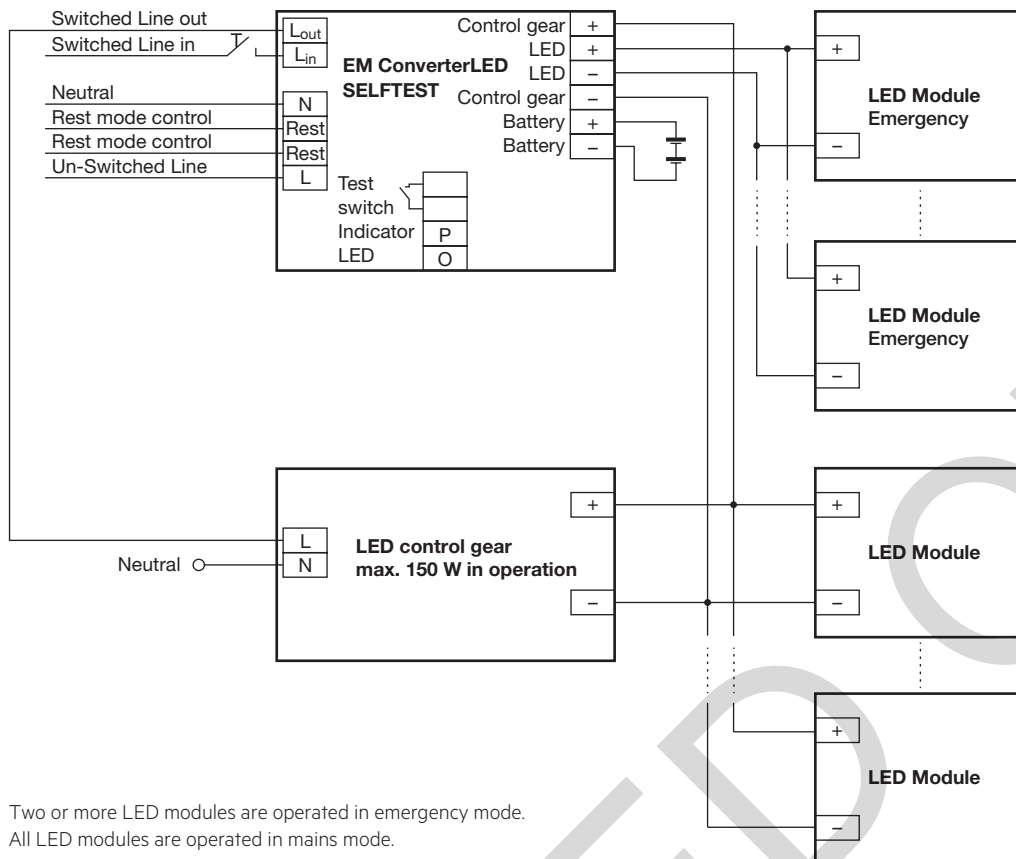
## 3. Installation / Wiring

#### 3.1 Wiring diagram

One or more LED modules with a total forward voltage of 50 to 90 V can be connected to the EM converterLED 90V module. These LED module(s), marked with "Emergency" are operated in emergency mode from the associated battery. In normal mains mode all LED modules are operated by the mains LED Driver.

**EM converterLED SELFTEST with one LED module for non-maintained emergency operation****EM converterLED SELFTEST with a standard LED Driver and one LED module for mains and emergency operation****EM converterLED SELFTEST with a standard LED Driver and series operation of LED modules**

**EM converterLED SELFTEST with a standard LED Driver and series operation of LED modules****EM converterLED SELFTEST with a standard LED Driver and parallel operation of LED modules**


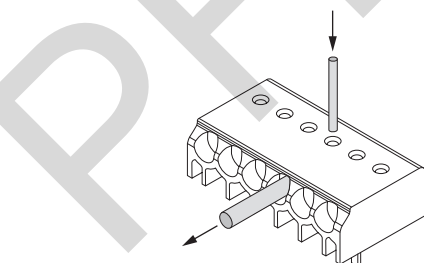
**EM converterLED SELFTEST with a standard LED Driver and parallel operation of LED modules**

Two or more LED modules are operated in emergency mode.  
All LED modules are operated in mains mode.

**3.2 Wiring type and cross section**

Solid wire with a cross section of 0.5 – 1.5 mm<sup>2</sup>. Strip 8 – 9 mm of insulation from the cables to ensure perfect operation of terminals.

Wiring: LED module/LED Driver/supply

**3.3 Loose wiring**

Loosen wire through twisting and pulling or using a Ø 1 mm release tool

**3.4 Wiring guidelines**

- The LED terminals, battery, indicator LED and test switch terminals are classified as SELV (output voltage < 120 V DC). Keep the wiring of the input terminals separated from the wiring of the SELV equivalent terminals or consider special wiring (double insulation, 6 mm creepage and clearance) when these connections should be kept SELV.
- The output to the LED is DC but has high frequency content, which should be considered for good EMC compliance.
- LED leads should be separated from the mains and DALI connections and wiring for good EMC performance.
- Maximum lead length on the LED terminals is 3 m. For a good EMC performance keep the LED wiring as short as possible.
- The secondary wires (LED module) should be routed in parallel to ensure good EMC performance.
- Maximum lead length for the Test switch and Indicator LED connection is 1 m. The test switch and Indicator LED wiring should be separated from the LED leads to prevent noise coupling.
- Battery leads are specified with 0.5 mm cross section and a length of 1.3 m
- DALI terminals are mains proof
- To avoid the damage of the control gear, the wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.)

To ensure that a luminaire containing LED emergency units complies with EN 55015 for radio frequency conducted interference in both normal and emergency mode it is essential to follow good practice in the wiring layout.

Within the luminaire the switched and unswitched 50 Hz supply wiring must be routed as short as possible and be kept as far away as possible from the LED leads. Through wiring may affect the emc performance of the luminaire.

The length of LED leads to the LED module must not be exceeded. Note that the length of the EM converterLED leads to the LED module is added to the length of the leads from the LED Driver to the EM converterLED module when considering the max. permitted lead length of the LED Driver.

### 3.5 Maximum lead length

LED	3 m (6 m loop) <sup>①</sup>
Status indication LED	1 m
Batteries	1.3 m

<sup>①</sup> Note: The length of LED leads to the LED module must not be exceeded. Note that the length of the EM converterLED leads is added to the length of the leads from the LED Driver to the EM converterLED module when considering max. permitted lead length of the LED Driver. Leads should always be kept as short as possible.

### 3.6 Use of different phases

The use of different phases for switched line and unswitched line is allowed. When using different phases, the unswitched line must fail if the switched line fails. This is required to assure correct switching into emergency mode. It can be realised with a relay.

## 4. Mechanical values

### 4.1 Housing properties

- Casing manufactured from polycarbonate.
- Type of protection: IP20
- Max. torque at the mounting screws: 0.8 Nm

### 4.2 Mechanical data accessories

LED status indicator

- Bi-colour
- Mounting hole 6.5 mm diameter, 1 – 1.6 mm thickness
- Lead length 0.3 m / 1.0 m
- Insulation rating: 90 °C
- Plug connection

Test switch

- Mounting hole 7.0 mm diameter
- Lead length 0.55 m
- Plug connection

Battery leads

- Quantity: 1 red and 1 black
- Length: 1.3 m
- Wire type: 0.5 mm<sup>2</sup> solid conductor
- Insulation rating: 90 °C

Battery end termination

Push on 4.8 mm receptacle to suit battery spade fitted with insulating cover

Module end termination

8.0 mm stripped insulation

Two-piece batteries are supplied with a 200 mm lead with 4.8 mm receptacle at each end and insulating covers to connect the separate sticks together.



## 5. Electrical values

### 5.1 Maximum loading of automatic circuit breakers

Automatic circuit breaker type	B10	B13	B16	B20	C10	C13	C16	C20	Inrush current	
Installation Ø	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	I <sub>max</sub>	time
<b>EM converterLED 104 ST 90V</b>	90	130	130	130	180	260	260	260	10 A	120 µs
<b>EM converterLED 105 ST 90V</b>	90	130	130	130	180	260	260	260	10 A	120 µs

### 5.2 Typ. LED current/voltage characteristics

The LED current in emergency mode is automatically adjusted by the EM converterLED module based on the total forward voltage of the LED modules connected and the associated battery.

EM converterLED ST 104 90V / EM converterLED ST 104 NiMH 90V

Article number: 89800190 / 89800322

4.8 V battery voltage

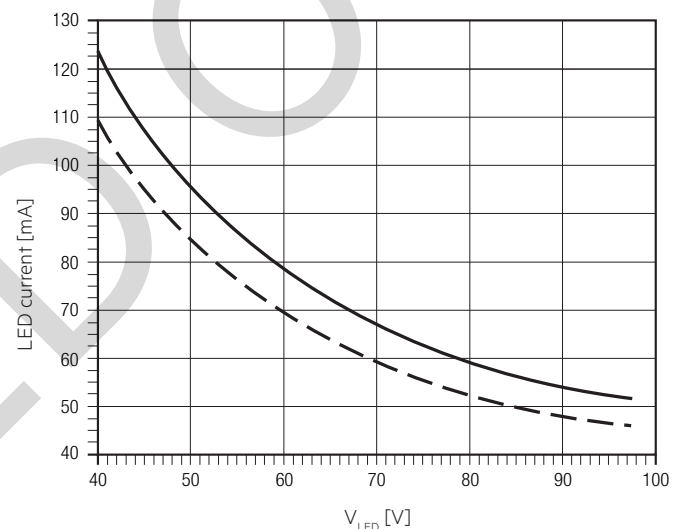
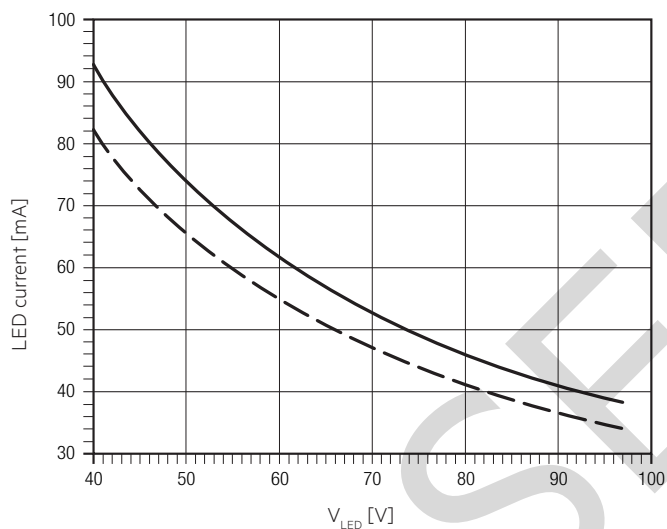
850 – 960 mA battery discharge current (tolerance)

EM converterLED ST 105 90V / EM converterLED ST 105 NiMH 90V

Article number: 89800191 / 89800323

6.0 V battery voltage

850 – 960 mA battery discharge current (tolerance)



LED peak current at start in emergency mode – 4 cells

Voltage	Inrush current	Duration
49.5 V	209 mA	10.3 ms
52.0 V	202 mA	9.7 ms
54.6 V	195 mA	8.9 ms
57.1 V	189 mA	7.9 ms
62.2 V	180 mA	6.9 ms
64.7 V	174 mA	6.5 ms
67.3 V	168 mA	6.3 ms
72.3 V	161 mA	5.5 ms
74.9 V	157 mA	5.4 ms
79.9 V	148 mA	5.2 ms
82.5 V	145 mA	4.6 ms
84.9 V	144 mA	4.4 ms
87.5 V	139 mA	4.3 ms
90.0 V	135 mA	4.2 ms

LED peak current at start in emergency mode – 5 cells

Voltage	Inrush current	Duration
49.9 V	228 mA	12.9 ms
52.5 V	222 mA	11.3 ms
55.0 V	215 mA	10.0 ms
57.5 V	209 mA	9.5 ms
62.7 V	199 mA	8.7 ms
65.2 V	196 mA	8.1 ms
67.7 V	189 mA	7.7 ms
72.8 V	183 mA	6.8 ms
77.9 V	175 mA	6.2 ms
80.5 V	172 mA	6.0 ms
83.0 V	169 mA	5.8 ms
85.5 V	166 mA	5.5 ms
88.0 V	163 mA	5.3 ms
90.6 V	161 mA	5.0 ms

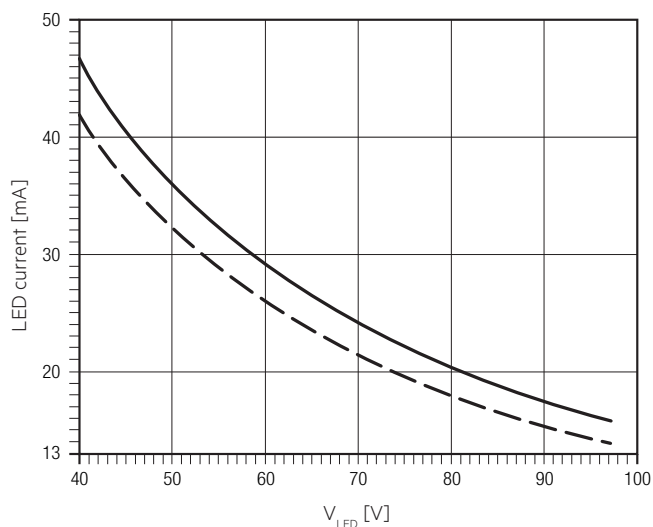
Note: LED peak current measured at the max. battery discharge current and a max. battery voltage of 6 V (4 cells) or 7.5 V (5 cells).

EM converterLED ST 135 NiCd 90V

Article number: 89800192

6.0 V battery voltage

360 – 400 mA battery discharge current (tolerance)



LED peak current at start in emergency mode – 5 cells

Voltage	Inrush current	Duration
51.5 V	284 mA	4.6 ms
53.9 V	276 mA	4.2 ms
56.5 V	268 mA	3.9 ms
61.5 V	240 mA	3.5 ms
64.0 V	226 mA	3.4 ms
66.5 V	222 mA	3.2 ms
69.0 V	214 mA	3.0 ms
71.5 V	209 mA	2.9 ms
76.5 V	199 mA	2.8 ms
79.0 V	195 mA	2.5 ms
81.5 V	187 mA	2.3 ms
84.0 V	176 mA	2.2 ms
86.5 V	168 mA	2.0 ms
89.1 V	160 mA	1.9 ms

--- LED current at nominal battery voltage and min. battery discharge current

— LED current at nominal battery voltage and max. battery discharge current

### 5.3 LED Driver compatibility



The EM converterLED emergency unit use 3 pole technology and is compatible with most LED Drivers on the market, however it is important to check that the rating of the LED Driver does not exceed the values specified below:

- The max. allowed output current rating of the associated LED Driver is 2.4 A peak (current rating of switching relays of EM converterLED)
- The max. allowed inrush current rating of the associated LED Driver is 60 A peak for 1 ms or 84 A for 255  $\mu$ s (inrush current rating of switching relay of EM converterLED)
- The max. allowed output voltage of the associated LED Driver applied to the EM converterLED output is 450V (voltage withstand between adjacent contact of the single switching relay of the EM converterLED)
- The max. allowed LED load of the associated LED Driver is 150 W in operation. The load must be an LED module.

Check compatibility with the carried out function test (duration at least 5 seconds) individually for each device.

## 6. Functions

### 6.1 Duration link selection

Duration	Link position
3 hr	 Position A
1 hr	 Position B

Module supplied with duration link in 3 hours position (position A).

The position of the link will only be read on first power up. If it is changed afterwards both the battery and mains supply must be disconnected for 10 seconds to enable the EM converterLED to read the new link position on reconnection of the battery and mains. It will lead to a false battery failure indication if the link is changed after installation without this reset.

### 6.2 Status indication

System status is indicated by a bi-colour LED.

LED indication	Status	Comment
Permanent green	System OK	AC mode
Fast flashing green (0,1 sec on – 0,1 sec off)	Function test underway	
Slow flashing green (1 sec on – 1 sec off)	Duration test underway	
Red LED on	Load failure	Open circuit / Short circuit / LED failure
Slow flashing red (1 sec on – 1 sec off)	Battery failure	Battery failed the duration test or function test / Battery is defect or deep discharged / Incorrect battery voltage
Fast flashing red (0,1 sec on – 0,1 sec off)	Charging failure	Incorrect charging current
Double pulsing green	Inhibit mode	Switching into inhibit mode via controller
Green and red off	DC mode	Battery operation (emergency mode)

### 6.3 Commissioning

After installation of the luminaire and initial connection of the mains supply and battery supply to the EM converterLED ST the unit will commence charging the batteries for 20 hours (initial charge). The 20 hours recharge occurs also if a new battery is connected or the module exits the rest mode condition.

The following automatic commissioning duration test is only performed when a battery is replaced and fully charged (after 20 hours).

### 6.4 Testing

#### Commissioning test

A full commissioning test is carried out automatically after permanent connection of the supply for 5 days. The easy commissioning feature will set the initial test day and time to ensure random testing of units.

#### Functional test

Functional tests are carried out for 5 seconds on a weekly basis under the control of the Micro controller. Initiation and timing of these tests is set during the commissioning of the luminaire.

#### Duration test

A full duration test is carried out yearly to check the capacity of the batteries.

For a full description of commissioning and test features please refer to application notes.

#### Test switch

An optional test switch can be wired to each EM converterLED ST. This can be used to to:

- Initiate a 5 seconds function test: press 200 ms < T < 1 s
- Execute function test as long as switch pressed: press > 1 s
- Reset selftest timer (adjust local timing): press > 10 s

#### Timer reset functionality

The timer for function and duration test can be set to a particular time of the day by either pressing the test switch for longer than 10 seconds or cycling the unswitched line supply 5 times within 1 minute. The timer adjustment will enable the test start time to be defined manually at time in day when the timer was reset. It will also disable the adaptive test algorithm thereby forcing the unit to perform the test at the same time rather than it being defined by the adaptive algorithm. This function will only work provided the interval time is greater than zero (automatic test mode enabled). The delay timer value set when the unit was commissioned will be reloaded in order to randomise the tests between adjacent units.

#### Rest Mode / Inhibit Mode

Emergency operation is automatically started when the mains supply is switched off. If the Rest Mode is activated, the discharging of the battery will be minimized by switching off the LED output. If the Inhibit Mode has been activated before the mains supply is switched off, Rest Mode will be automatically activated if the mains supply is switched off within 15 minutes.

Rest Mode and Inhibit Mode can be initiated by applying a short pulse between 9.5 and 22.5 V<sub>DC</sub> in amplitude for a period of 150 to 1,000 ms. This pulse shall be applied to terminals marked Rest.

After a mains reset the EM converterLED ST exits the Rest Mode. Rest Mode and Inhibit Mode can both be disabled by applying a voltage pulse of 1,000 to 2,000 ms to the terminals marked as Rest to send the RE-LIGHT/RESET INHIBIT command.

Pulse/Mode	Standby	Emergency	Rest
150 – 1,000 ms	Inhibit	Rest	–
1,000 – 2,000 ms	Cancel inhibit	–	Re-light

## 7. Battery data

### 7.1 Battery selection

EM converterLED SELFTEST, 1/ 3 h

			Type	EM converterLED ST 104 90V		EM converterLED ST 105 90V		EM converterLED ST 135 NiCd 90V		EM converterLED ST 104 NiMH 90V		EM converterLED ST 105 NiMH 90V	
			Article no.	89800190		89800191		89800192		89800322		89800323	
			Cells	4 cells		5 cells		5 cells		4 cells		5 cells	
			Duration	1 h	3 h	1 h	3 h	3 h		1 h	3 h	1 h	3 h
Technology and capacity	Design	Number of cells	Type	Article no. Assignable batteries									
NiCd 4 Ah D cells	stick	1 x 4	Accu-NiCd 4A 55	89800089		•							
	stick	1 x 5	Accu-NiCd 5A 55	28002774				•					
	stick + stick	2 + 2	Accu-NiCd 4C 55	28002775		•							
	stick + stick	3 + 2	Accu-NiCd 5C 55	89800090				•					
	side by side	4 x 1	Accu-NiCd 4B 55	89800385		•							
NiMH 2.2 Ah Cs cells	stick	1 x 4	Accu-NiMH 4A	28002089	•					•			
	stick	1 x 5	Accu-NiMH 5A	28002090			•		•			•	
	side by side	5 x 1	Accu-NiMH 5B	28002093			•		•			•	
NiMH 4 Ah LA cells	stick	1 x 4	Accu-NiMH 4Ah 4A CON	89800442		•					•		
	stick + stick	2 + 2	Accu-NiMH 4Ah 4C CON	89800438		•					•		
	stick + stick	3 + 2	Accu-NiMH 4Ah 5C CON	89800439			•						•

### 7.2 Battery charge / discharge data

EM converterLED SELFTEST, 1/ 3 h

	Type	EM converterLED ST 104 90V		EM converterLED ST 105 90V		EM converterLED ST 135 90V	EM converterLED ST 104 NiMH 90V		EM converterLED ST 105 NiMH 90V	
	Article no.	89800190		89800191		89800192	89800322		89800323	
	Cells	4 cells		5 cells		5 cells	4 cells		5 cells	
	Duration	1 h	3 h	1 h	3 h	3 h	1 h	3 h	1 h	3 h
Battery charge time	Initial charge	20 h								
	Fast recharge	10 h	15 h <sup>①</sup>	10 h	15 h <sup>①</sup>	10 h	10 h	15 h <sup>①</sup>	10 h	15 h <sup>①</sup>
	Trickle charge	continuously								
Charge current	Initial charge	130 mA	300 mA	130 mA	300 mA	130 mA	130 mA	300 mA	130 mA	300 mA
	Fast recharge	210 mA	330 mA	210 mA	330 mA	210 mA	210 mA	330 mA	210 mA	330 mA
	Trickle charge	50 mA	130 mA	50 mA	130 mA	50 mA	130 mA / 4 min. 0 mA / 16 min.	200 mA / 4 min. 0 mA / 16 min.	130 mA / 4 min. 0 mA / 16 min.	200 mA / 4 min. 0 mA / 16 min.
Discharge current		850 – 960 mA	850 – 960 mA	850 – 960 mA	850 – 960 mA	360 – 400 mA	850 – 960 mA	850 – 960 mA	850 – 960 mA	850 – 960 mA

<sup>®</sup> 2 h emergency operation can be achieved after 12 h of charging.

### 7.3 Accu-NiCd

#### 4.2 / 4.5 Ah

International designation	KRMU 33/62
Battery voltage/cell	12 V
Cell type	D
Case temperature range to ensure 4 years design life	5 °C to +55 °C
Max. short term temperature (reduced life-time)	70 °C
Max. number discharge cycles	4 cycles per year plus 4 cycles during commissioning
Max. storage time	6 months

### 7.4 Accu-NiMH

#### 2.2 Ah

International designation	HRMU 23/43
Battery voltage/cell	12 V
Cell type	Cs
Case temperature range to ensure 4 years design life	+5 °C to +50 °C
When used with EM converterLED PRO xx 50V	+5 °C to +55 °C
When used with EM converterLED PRO xx <b>NiMH</b> 50V	+5 °C to +55 °C
Max. short term temperature (reduced life-time)	70 °C
Max. number discharge cycles	4 cycles per year plus 30 cycles during commissioning
Max. storage time	12 months

#### 4.0 Ah

International designation	HRMU 19/90
Battery voltage/cell	12 V
Cell type	LA
Case temperature range to ensure 4 years design life	+5 °C to +45 °C
When used with EM converterLED PRO xx 50V	+5 °C to +50 °C
When used with EM converterLED PRO xx <b>NiMH</b> 50V	+5 °C to +50 °C
Max. short term temperature (reduced life-time)	70 °C
Max. number discharge cycles	4 cycles per year plus 30 cycles during commissioning
Max. storage time	12 months

### 7.5 Wiring batteries

Connection method: 4.8 x 0.5 mm spade tag welded to end of cell.

For stick packs this connection is accessible after the battery caps have been fitted.

To inhibit inverter operation disconnect the batteries by removing the connector from the battery spade tag.

For further information refer to corresponding battery datasheet.

### 7.6 Storage, installation and commissioning

Relevant information about storage conditions, installation and commissioning are provided in the battery datasheets.

### 8. Miscellaneous

#### 8.1 Maximum number of switching cycles

All LED Drivers are tested with 50,000 switching cycles.  
The actually achieved number of switching cycles is significantly higher.

#### 8.2 Battery replacement

After a battery replacement and a subsequent full charge cycle (24 h) a duration test is mandatory to prove that with the new battery the rated duration is achieved.

#### 8.3 Additional information

Additional technical information at [www.tridonic.com](http://www.tridonic.com) → Technical Data

Guarantee conditions at [www.tridonic.com](http://www.tridonic.com) → Services

Life-time declarations are informative and represent no warranty claim.  
No warranty if device was opened.