

#### EM converterLED ST MH/LiFePO<sub>4</sub> 250 V

SELFTEST series

#### Product description

- Emergency lighting LED driver with self-test function
- For self-contained emergency lighting
- For LED modules with a forward voltage of 50 – 250 V
- Low profile casing (21 x 30 mm cross-section)
- For luminaire installation
- Nominal lifetime up to 100,000 h
- 5 years guarantee (conditions at [www.tridonic.com](http://www.tridonic.com))

#### Properties

- Non maintained operation
- Self-test as per IEC 62034
- 1, 2 or 3 h rated duration
- Operating time selectable with plug (duration link)
- Compatible with most constant current LED drivers (see 5.4)
- 3-pole technology: 2-pole LED module changeover and delayed power switching for the LED driver
- Automatic shutdown of output if LED load is out of range
- Constant power output
- Two-colour status display LED
- Electronic charge system
- Deep discharge protection
- Short-circuit-proof battery connection
- Polarity reversal protection for battery provided by 3-pole connector
- Automatic detection of the connected battery technology (NiMH or LiFePO<sub>4</sub> batteries)
- Self-test:
  - Status of the battery
  - Status of the LED
  - Function test
  - Duration test


#### Batteries

- High-temperature cells
- NiMH or LiFePO<sub>4</sub> batteries
- LA or 18650 cells
- 4-year design life for NiMH batteries
- 1-year guarantee for NiMH batteries
- 4 – 8 years design life for LiFePO<sub>4</sub> batteries
- 4 years guarantee for LiFePO<sub>4</sub> batteries
- LiFePO<sub>4</sub> batteries with Tridonic LiFeGuard
- For battery compatibility refer to chapter „Battery selection“



**Standards**, page 5

**Wiring diagrams and installation examples**, page 6

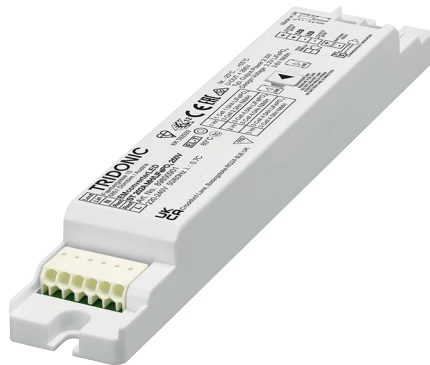




#### EM converterLED ST MH/LiFePO<sub>4</sub> 250 V

#### SELFTEST series

#### Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 264 V
Mains frequency	50 / 60 Hz
LED module forward voltage range	50 – 250 V
Output current	see chapter 5.3
Starting time	< 0.5 s from detection of emergency event
Overvoltage protection	320 V (for 48 h)
U-OUT (including open- / short-circuit and double load)	300 V
Max. open circuit voltage	300 V
Ambient temperature range $t_a$	-25 ... +55 °C
Max. casing temperature $t_c$	80 °C
Mains voltage changeover threshold	according to EN 60598-2-22
Mains surge capability (between L – N)	1 kV
Mains surge capability (between L/N – PE)	2 kV
Type of protection	IP20
Rest mode max. number of emergency units	100
Rest mode max. wiring distance	1,000 m
Functional test	Weekly 5s test
Duration test	Yearly 1 h / 2 h / 3 h test
Lifetime	up to 100,000 h
Guarantee (conditions at <a href="http://www.tridonic.com">www.tridonic.com</a> )	5 years
Dimensions LxWxH	179 x 30 x 21 mm

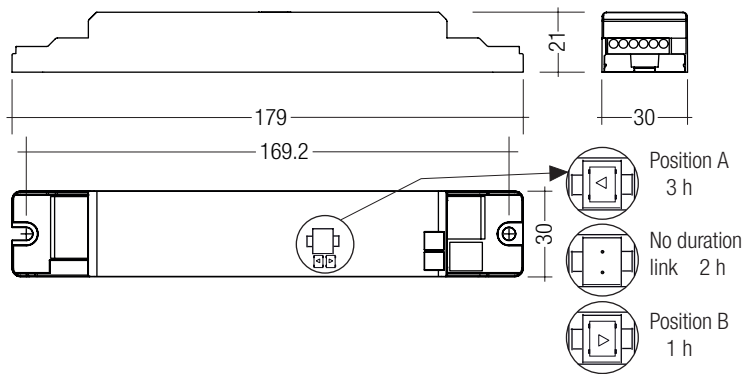

Note: LED driver supplied with duration link in 3 hours position. Duration link must be set before battery and mains connection.

#### Ordering data

Type <sup>①</sup>	Article number	Rated duration	Packaging, carton	Packaging, pallet	Weight per pc.
<b>EM converterLED ST 202A MH/LiFePO<sub>4</sub> 250V</b>	<b>89800901</b>	1/2/3 h	10 pc(s).	1,600 pc(s).	0.07 kg
<b>EM converterLED ST 203 MH/LiFePO<sub>4</sub> 250V</b>	<b>89800634</b>	1/2/3 h	10 pc(s).	1,600 pc(s).	0.07 kg
<b>EM converterLED ST 204 MH/LiFePO<sub>4</sub> 250V</b>	<b>89800635</b>	1/2/3 h	10 pc(s).	1,600 pc(s).	0.07 kg
<b>EM converterLED ST 205 MH/LiFePO<sub>4</sub> 250V</b>	<b>89800636</b>	1/2/3 h	10 pc(s).	1,600 pc(s).	0.07 kg

#### Specific technical data

Type <sup>①</sup>	Battery technology <sup>②</sup>	Rated duration	Typ. $\lambda$ (at 230 V, 50 Hz)	Typ. output power P emergency	Mains current in charging operation			Rated power in charging operation		
					Initial charge	Fast recharge	Trickle charge <sup>③</sup>	Initial charge	Fast recharge	Trickle charge <sup>③</sup>
<b>EM converterLED ST 202A MH/LiFePO<sub>4</sub> 250V</b>	NiMH	1 h	0.70C	2.3 W	16 mA	18 mA	16 / 11 mA	2.1 W	2.6 W	2.1 / 1.4 W
		2 h	0.70C	2.3 W	20 mA	20 mA	20 / 11 mA	3.1 W	3.1 W	3.1 / 1.4 W
		3 h	0.70C	2.3 W	20 mA	20 mA	20 / 11 mA	3.1 W	3.1 W	3.1 / 1.4 W
	LiFePO <sub>4</sub>	1 h	0.65C	2.3 W	15 mA	15 mA	15 / 11 mA	2.1 W	2.1 W	2.1 / 1.4 W
		2 h	0.65C	2.3 W	19 mA	19 mA	19 / 11 mA	2.8 W	2.8 W	2.8 / 1.4 W
		3 h	0.65C	2.3 W	19 mA	19 mA	19 / 11 mA	2.8 W	2.8 W	2.8 / 1.4 W
<b>EM converterLED ST 203 MH/LiFePO<sub>4</sub> 250V</b>	NiMH	1 h	0.70C	2.5 W	16 mA	18 mA	16 / 11 mA	2.1 W	2.6 W	2.1 / 1.4 W
		2 h	0.70C	2.5 W	20 mA	21 mA	20 / 11 mA	3.1 W	3.1 W	3.1 / 1.4 W
		3 h	0.70C	2.5 W	20 mA	21 mA	20 / 11 mA	3.1 W	3.1 W	3.1 / 1.4 W
	LiFePO <sub>4</sub>	1 h	0.70C	2.5 W	19 mA	19 mA	19 / 11 mA	2.8 W	2.8 W	2.8 / 1.4 W
		2 h	0.70C	2.5 W	24 mA	24 mA	24 / 11 mA	3.8 W	3.8 W	3.8 / 1.4 W
		3 h	0.70C	2.5 W	24 mA	24 mA	24 / 11 mA	3.8 W	3.8 W	3.8 / 1.4 W
<b>EM converterLED ST 204 MH/LiFePO<sub>4</sub> 250V</b>	NiMH	1 h	0.70C	3.5 W	17 mA	20 mA	17 / 11 mA	2.3 W	2.9 W	2.3 / 1.4 W
		2 h	0.70C	3.5 W	23 mA	24 mA	23 / 11 mA	3.6 W	3.6 W	3.6 / 1.4 W
		3 h	0.70C	3.5 W	23 mA	24 mA	23 / 11 mA	3.6 W	3.6 W	3.6 / 1.4 W
	LiFePO <sub>4</sub>	1 h	0.70C	3.5 W	19 mA	19 mA	19 / 11 mA	2.8 W	2.8 W	2.8 / 1.4 W
		2 h	0.70C	3.5 W	24 mA	24 mA	24 / 11 mA	3.8 W	3.8 W	3.8 / 1.4 W
		3 h	0.70C	3.5 W	24 mA	24 mA	24 / 11 mA	3.8 W	3.8 W	3.8 / 1.4 W
<b>EM converterLED ST 205 MH/LiFePO<sub>4</sub> 250V</b>	NiMH	1 h	0.70C	4.5 W	18 mA	22 mA	18 / 11 mA	2.6 W	3.2 W	2.6 / 1.4 W
		2 h	0.70C	4.5 W	25 mA	26 mA	25 / 11 mA	4.1 W	4.1 W	4.1 / 1.4 W
		3 h	0.70C	4.5 W	25 mA	26 mA	25 / 11 mA	4.1 W	4.1 W	4.1 / 1.4 W
	LiFePO <sub>4</sub>	1 h	0.70C	4.5 W	19 mA	19 mA	19 / 11 mA	2.8 W	2.8 W	2.8 / 1.4 W
		2 h	0.70C	4.5 W	24 mA	24 mA	24 / 11 mA	3.8 W	3.8 W	3.8 / 1.4 W
		3 h	0.70C	4.5 W	24 mA	24 mA	24 / 11 mA	3.8 W	3.8 W	3.8 / 1.4 W

<sup>①</sup> EM = Emergency

<sup>②</sup> In case of NiMH batteries: Intermittent charge is used. Value 1 is for 4 min. charge on / Value 2 is for 16 min. charge off. In case of LiFePO<sub>4</sub> batteries voltage dependent constant current charging is used.

<sup>③</sup> 12 h battery charging time for 2 h emergency lighting function when used with LiFePO<sub>4</sub> batteries.




ACCES-  
SORIES

EMcLED Strain-relief set 240x43x30mm

Product description

- Optional strain-relief set for independent applications
- Transforms the LED driver into a fully class II compatible LED driver (e.g. ceiling installation)
- Easy and tool-free mounting to the LED driver, screwless cable-clamp channels with strain-relief (240 x 43 x 30 mm)

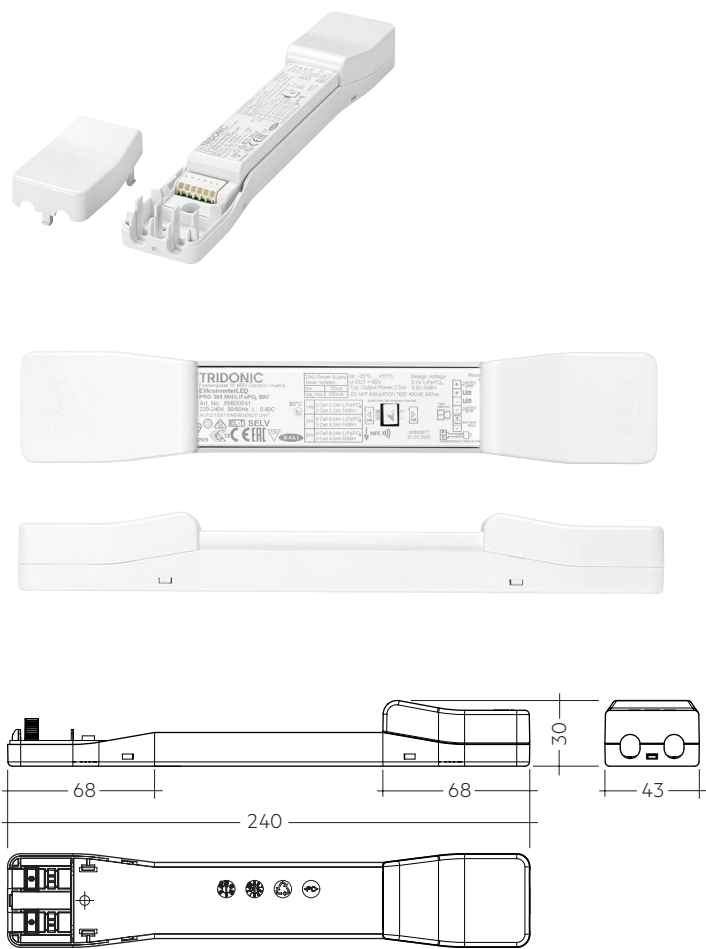

Permissible cable jacket diameter 2.2 – 9 mm

Ordering data

Type	Article number	Packaging, carton	Packaging, pallet	Weight per pc.
EMcLED SR	28003813	10 pc(s).	1,260 pc(s).	0.08 kg

RoHS

ACCESSORIES

## Test switch EM3

## Product description

- For connection to the emergency lighting unit
- For checking the device function
- Plug connection
- Dielectric strength: 1,500 V AC for 60 seconds



## Ordering data

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
Test switch EM 3	89899956	25 pc(s).	200 pc(s).	0.013 kg

ACCESSORIES

## Status indication bi-colour LED

## Product description

- Two-colour status display LED
- Green: system OK, red: fault
- Plug connection



## Ordering data

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
LED EM bi-colour, 1.0 m CON	89800273	25 pc(s).	200 pc(s).	0.015 kg
LED EM bi-colour, high brightness HO 1.0 m CON	89800275	25 pc(s).	200 pc(s).	0.015 kg
LED EM bi-colour, 0.6 m CON	89800474	25 pc(s).	200 pc(s).	0.005 kg
LED EM bi-colour, high brightness HO 0.6 m CON	89800475	25 pc(s).	200 pc(s).	0.005 kg
LED EM bi-colour, 0.3 m CON	89800274	25 pc(s).	200 pc(s).	0.005 kg
LED EM bi-colour, high brightness HO 0.3 m CON	89800276	25 pc(s).	200 pc(s).	0.005 kg

Extension Cable LiFePO<sub>4</sub>

## Product description

- Extension cable for LiFePO<sub>4</sub> batteries
- Cable length 500 mm
- 3-pole plug connection




## Ordering data

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
EXTENSION CABLE LiFePO <sub>4</sub> 500mm	28002461	10 pc(s).	200 pc(s).	0.01 kg

## Connection Cable NiMH

## Product description

- Connection cable for NiMH batteries
- Cable length 500 mm
- 2-pole plug connection for batteries and 3-pole plug connection for LED driver

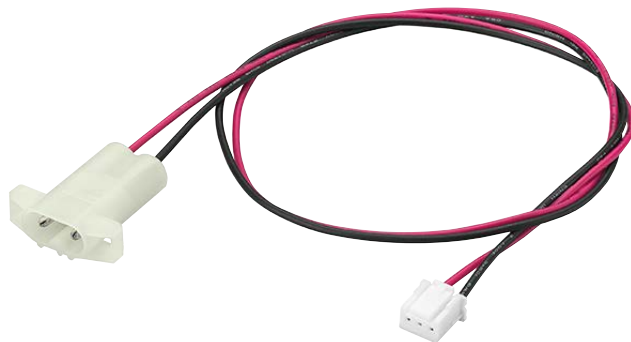


## Ordering data

Type	Article number	Packaging, bag	Packaging, carton	Weight per pc.
CONNECTION CABLE NiMH 500mm	28002462	10 pc(s).	200 pc(s).	0.015 kg

## 1. Standards

- EN 61347-1
- EN 61347-2-13
- EN 61347-2-7
- EN 55015
- EN 61000-3-2
- EN 61000-3-3
- EN 61547
- EN 60068-2-64
- EN 60068-2-29
- EN 60068-2-30
- EN 62384
- according to EN 50172
- according to EN 60598-2-22
- according to EN 62034

Meaning of marking 

Double or reinforced insulation for built-in electronic LED drivers. The control gear relies upon the luminaire enclosure for protection against accidental contact with live parts.

### 1.1 Glow-wire test

according to EN 61347-1 with increased temperature of 850 °C passed.

### 1.2 Insulation and electric strength testing of luminaires

Electronic LED-drivers can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an insulation test with 500 V<sub>DC</sub> for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal. The insulation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1,500 V<sub>AC</sub> (or 1,414 x 1,500 V<sub>DC</sub>). To avoid damage to the electronic devices this test **must not be conducted**.

## 2. Thermal details and lifetime

### 2.1 Lifetime

Average lifetime 50,000 hours under rated conditions with a failure rate of less than 10 %. Average failure rate of 0.2 % per 1000 operating hours.

#### Expected lifetime with NiMH batteries

<b>EM converterLED ST 202A</b>	tc	65 °C	70 °C	75 °C	80 °C
<b>MH/LiFePO<sub>4</sub> 250V</b>	lifetime	> 100,000 h	> 100,000 h	80,000 h	56,000 h
<b>EM converterLED ST 203</b>	tc	65 °C	70 °C	75 °C	80 °C
<b>MH/LiFePO<sub>4</sub> 250V</b>	lifetime	> 100,000 h	> 100,000 h	80,000 h	56,000 h
<b>EM converterLED ST 204</b>	tc	65 °C	70 °C	75 °C	80 °C
<b>MH/LiFePO<sub>4</sub> 250V</b>	lifetime	> 100,000 h	> 100,000 h	79,000 h	56,000 h
<b>EM converterLED ST 205</b>	tc	65 °C	70 °C	75 °C	80 °C
<b>MH/LiFePO<sub>4</sub> 250V</b>	lifetime	> 100,000 h	> 100,000 h	78,000 h	55,000 h

#### Expected lifetime with LiFePO<sub>4</sub> batteries

<b>EM converterLED ST 202A</b>	tc	65 °C	70 °C	75 °C	80 °C
<b>MH/LiFePO<sub>4</sub> 250V</b>	lifetime	> 100,000 h	> 100,000 h	82,000 h	58,000 h
<b>EM converterLED ST 203</b>	tc	65 °C	70 °C	75 °C	80 °C
<b>MH/LiFePO<sub>4</sub> 250V</b>	lifetime	> 100,000 h	> 100,000 h	82,000 h	58,000 h
<b>EM converterLED ST 204</b>	tc	65 °C	70 °C	75 °C	80 °C
<b>MH/LiFePO<sub>4</sub> 250V</b>	lifetime	> 100,000 h	> 100,000 h	82,000 h	58,000 h
<b>EM converterLED ST 205</b>	tc	65 °C	70 °C	75 °C	80 °C
<b>MH/LiFePO<sub>4</sub> 250V</b>	lifetime	> 100,000 h	> 100,000 h	82,000 h	58,000 h

The emergency lighting LED driver is designed for a lifetime stated above under reference conditions and with a failure probability of less than 10 %.


The relation of tc to ta temperature depends also on the luminaire design. If the measured tc temperature is approx. 5 K below tc max., ta temperature should be checked and eventually critical components (e.g. ELCAP) measured. Detailed information on request.

## 3. Installation / Wiring


### 3.1 Wiring diagram

One or more LED modules with a total forward voltage of 50 to 250 V can be connected to the EM converterLED module. These LED module(s), marked with “Emergency” are operated in emergency mode from the associated battery. In normal mains mode all LED modules are operated by the mains LED driver.


### EM converterLED SELFTEST with one LED module for non-maintained emergency operation

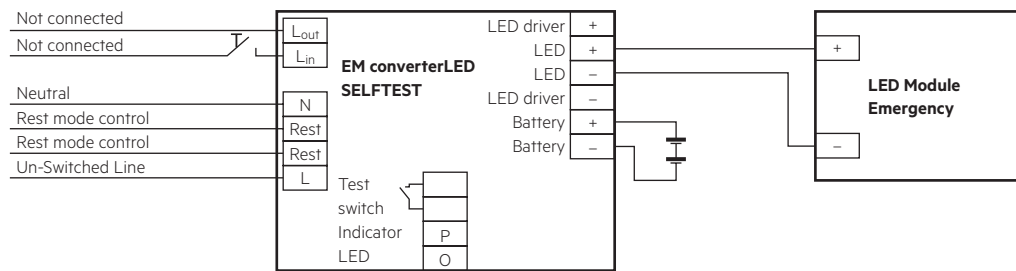

### EM converterLED SELFTEST with a standard LED driver and one LED module for mains and emergency operation

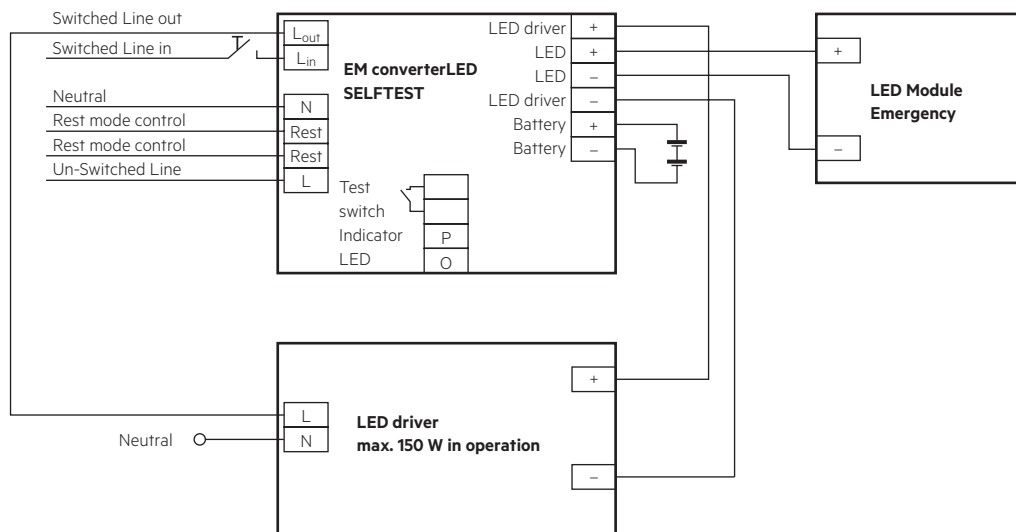

### EM converterLED SELFTEST with a standard LED driver and series operation of LED modules

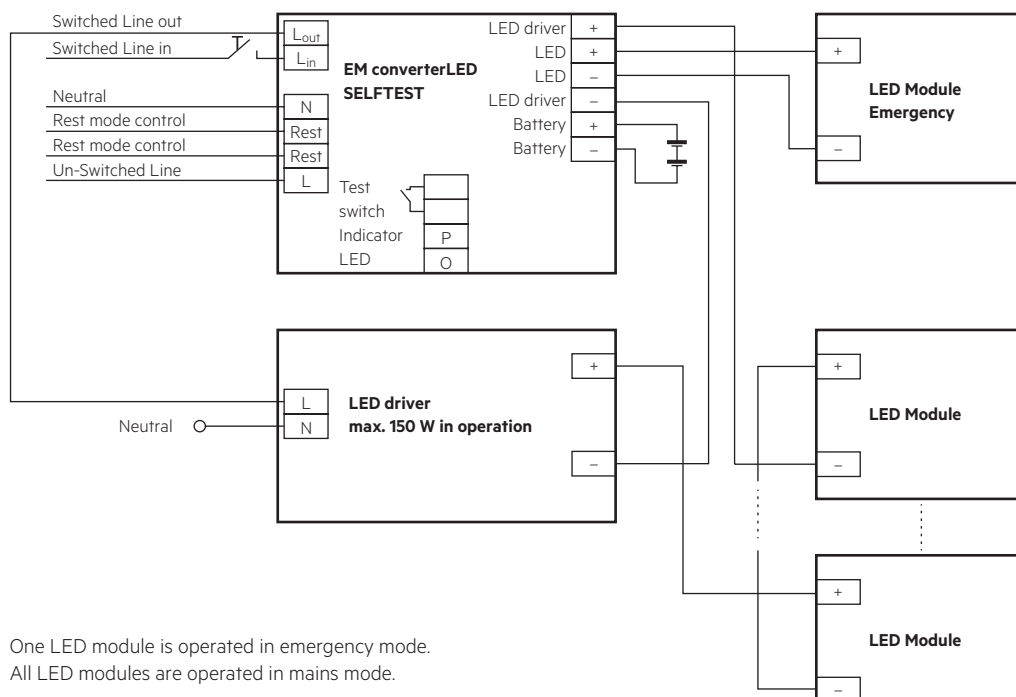

One LED module is operated in emergency mode.  
All LED modules are operated in mains mode.

The diagram illustrates the electrical connections for the LED module. It features three main components: an EM converter, an LED driver, and multiple LED modules.

- EM converter:**
  - Inputs:** Switched Line out, Switched Line in, Neutral, Rest mode control, Rest mode control, and Un-Switched Line.
  - Outputs:** L<sub>out</sub>, L<sub>in</sub>, N, Rest, Rest, L, Test switch, Indicator, and LED.
  - Internal Components:** LED driver, LED, LED, LED driver, Battery, and Battery.
- LED driver:**
  - Inputs:** L and N.
  - Output:** max. 150 W in operation.
- LED Modules:**
  - Emergency Mode:** One LED module is connected to the EM converter's L<sub>out</sub> and L<sub>in</sub> terminals.
  - Mains Mode:** All other LED modules are connected to the LED driver's output terminals.


One LED module is operated in emergency mode.  
All LED modules are operated in mains mode.

One LED module is operated in emergency mode.  
All LED modules are operated in mains mode.


Solid wire with a cross section of 0.5 – 1.5 mm<sup>2</sup>. Strip 8 – 9 mm of insulation from the cables to ensure perfect operation of terminals.

Wiring: LED module/LED driver/supply

wire preparation:  
0.5 – 1.5 mm<sup>2</sup>




## NiMH: Connection with extension

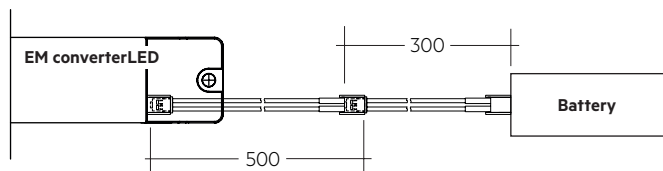


When using an EM converterLED in combination with a NiMH battery, order the CONNECTION CABLE NiMH 500mm separately.

LiFePO<sub>4</sub>: Direct connection

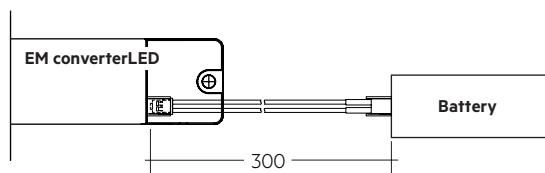


LiFePO<sub>4</sub>: Connection with extension

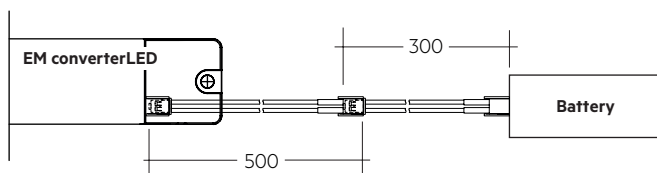



### 3.4 Loose wiring



Loosen wire through twisting and pulling or using a Ø 1 mm release tool

### 3.5 Wiring guidelines

- The output to the LED is DC but has high frequency content, which should be considered for good EMC compliance.
- Separate LED leads from the mains and REST connections and wiring for good EMC performance.
- Maximum lead length on the LED terminals is 3 m. For a good EMC performance keep the LED wiring as short as possible.
- Route the secondary wires (LED module) in parallel to ensure good EMC performance.
- Maximum lead length for the Test switch and Indicator LED connection is 1 m. Separate the test switch and Indicator LED wiring from the LED leads to prevent noise coupling.
- Battery leads are specified with 0.5 mm cross section and a length of 0.8 m
- REST terminals are mains proof.
- Protect the wiring against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.) to avoid the damage of the control gear.

To ensure that a luminaire containing LED emergency units complies with EN 55015 for radio frequency conducted interference in both normal and emergency mode it is essential to follow good practice in the wiring layout.

Within the luminaire route the switched and unswitched 50 Hz supply wiring as short as possible and keep it as far away as possible from the LED leads. Through wiring may affect the EMC performance of the luminaire.

Do not exceed the max. length of LED leads to the LED module. Note that the length of the EM converterLED leads to the LED module is added to the length of the leads from the LED driver to the EM converterLED module when considering the max. permitted lead length of the LED driver.

### 3.6 Maximum lead length

LED	3 m (6 m loop) <sup>®</sup>
Status indication LED	1 m
Batteries	0.8 m

<sup>®</sup> Note: The length of LED leads to the LED module must not be exceeded. Note that the length of the EM converterLED leads is added to the length of the leads from the LED driver to the EM converterLED module when considering max. permitted lead length of the LED driver. Leads should always be kept as short as possible.

### 3.7 Use of different phases

The use of different phases for switched line and unswitched line is allowed. When using different phases, the unswitched line must fail if the switched line fails. This is required to assure correct switching into emergency mode. It can be realised with a relay.

## 4. Mechanical values

### 4.1 Housing properties

- Casing manufactured from polycarbonate.
- Type of protection: IP20
- Max. torque at the mounting screws: 0.8 Nm

### 4.2 Mechanical data accessories

LED status indicator

- Bi-colour
- Mounting hole 6.5 mm diameter, 1 – 1.6 mm thickness
- Lead length 0.3 m / 1.0 m
- Insulation rating: 90 °C
- Plug connection

Test switch

- Mounting hole 7.0 mm diameter
- Lead length 0.55 m
- Plug connection

Battery connection

- Plug connection 0.3 m
- Extension 0.5 m

## 5. Electrical values

### 5.1 Maximum loading of automatic circuit breakers

Automatic circuit breaker type	B10	B13	B16	B20	C10	C13	C16	C20	Inrush current	
Installation Ø	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	I <sub>max</sub>	time
<b>EM converterLED ST MH/LiFePO4 250V</b>	90	130	130	130	180	260	260	260	10 A	120 µs

### 5.2 Insulation matrix

	Mains	Switched Live	Battery, LED, Test switch, Indicator LED	REST	LED driver
<b>Mains</b>	–	•	••	•	•
<b>Switched Live</b>	•	–	••	•	•
<b>Battery, LED, Test switch, Indicator LED</b>	••	••	–	•	•
<b>REST</b>	•	•	•	–	•
<b>LED driver</b>	•	•	–	•	–

• Represents basic insulation

•• Represents double or reinforced insulation

When using a non-SELV LED driver insulate the battery, LED, test switch and indicator LED in the luminaire according to the U-OUT rating of the LED driver.

### 5.3 Typ. LED current/voltage characteristics

The LED current in emergency mode is automatically adjusted by the EM converterLED module based on the total forward voltage of the LED modules connected and the associated battery. The start of the LED in emergency mode does not result in a current peak.

EM converterLED ST 202A MH/LiFePO<sub>4</sub> 250V


Article number: 89800901

NiMH battery, 3.6 V battery voltage

750 – 800 mA battery discharge current (tolerance)

LiFePO<sub>4</sub> battery, 3.2 V battery voltage

845 – 905 mA battery discharge current (tolerance)

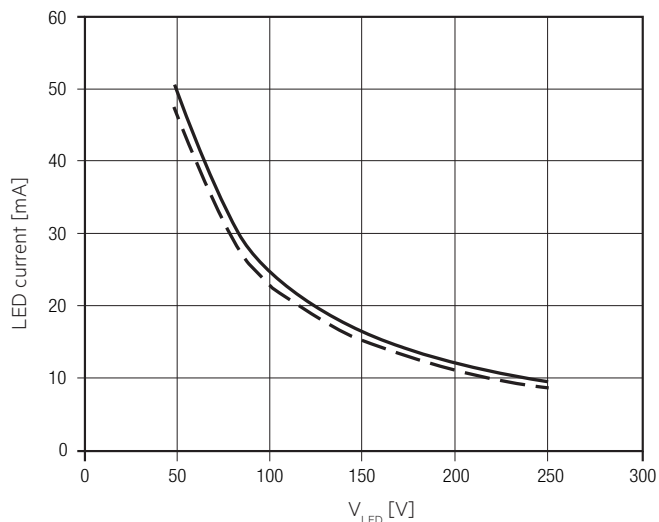

EM converterLED ST 203 MH/LiFePO<sub>4</sub> 250V


Article number: 89800634

NiMH battery, 3.6 V battery voltage

800 – 860 mA battery discharge current (tolerance)

LiFePO<sub>4</sub> battery, 3.2 V battery voltage

915 – 985 mA battery discharge current (tolerance)

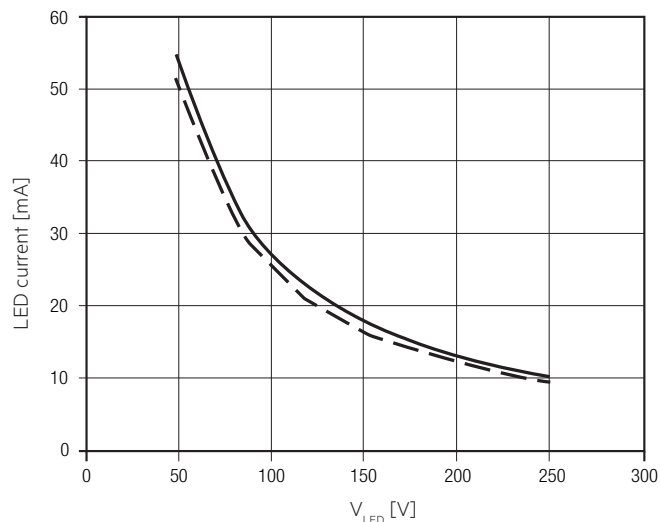

EM converterLED ST 204 MH/LiFePO<sub>4</sub> 250V


Article number: 89800635

NiMH battery, 4.8 V battery voltage

810 – 870 mA battery discharge current (tolerance)

LiFePO<sub>4</sub> battery, 3.2 V battery voltage

1,275 – 1,375 mA battery discharge current (tolerance)

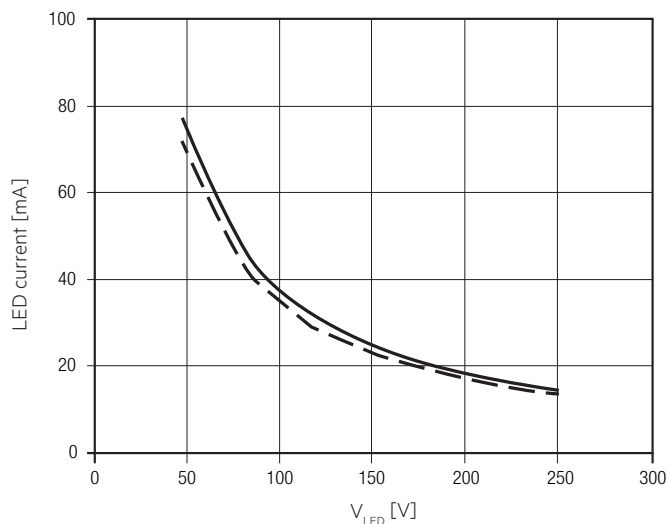

EM converterLED ST 205 MH/LiFePO<sub>4</sub> 250V


Article number: 89800636

NiMH battery, 6.0 V battery voltage

820 – 880 mA battery discharge current (tolerance)

LiFePO<sub>4</sub> battery, 3.2 V battery voltage

1,695 – 1,825 mA battery discharge current (tolerance)

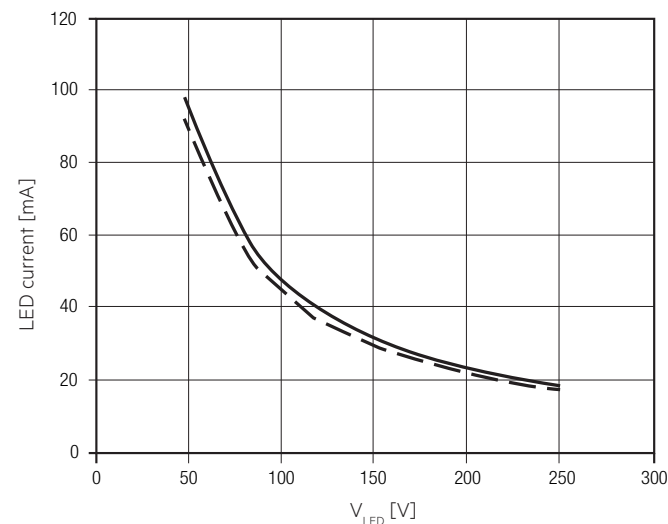

--- LED current at nominal battery voltage and min. battery discharge current

— LED current at nominal battery voltage and max. battery discharge current

## 5.4 LED driver compatibility




The EM converterLED emergency unit use 3 pole technology and is compatible with most LED drivers on the market, however it is important to check that the rating of the LED driver does not exceed the values specified below:

- The max. allowed output current rating of the associated LED driver is 2 A eff (Current rating of the terminals of EM converterLED) and 2.4 A peak (Current rating of switching relays of EM converterLED)
- The max. allowed inrush current rating of the associated LED driver is 60 A peak for 1 ms or 84 A for 255  $\mu$ s (inrush current rating of switching relay of EM converterLED)
- The max. allowed output voltage of the associated LED driver applied to the EM converterLED output is 450 V (voltage withstand between adjacent contact of the single switching relay of the EM converterLED)
- The max. allowed LED load of the associated LED driver is 150 W in operation. The load must be an LED module.

Check compatibility with the carried out function test (duration at least 5 seconds) individually for each device.

## 6. Functions

### 6.1 Duration link selection

Duration	Link position
3 hr	 Position A
2 hr	 No duration link
1 hr	 Position B

Emergency lighting LED driver supplied with duration link in 3 hours position (position A).

The position of the link will only be read on first power up. If it is changed afterwards both the battery and mains supply must be disconnected for 10 seconds to enable the EM converterLED to read the new link position on reconnection of the battery and mains. It will lead to a false battery failure indication if the link is changed after installation without this reset.

### 6.2 Status indication

System status is indicated by a bi-colour LED.

LED indication	Status	Comment
Permanent green	System OK	AC mode
Fast flashing green (0,1 sec on – 0,1 sec off)	Function test underway	
Slow flashing green (1 sec on – 1 sec off)	Duration test underway	
Red LED on	Load failure	Open circuit / Short circuit / LED failure
Slow flashing red (1 sec on – 1 sec off)	Battery failure	Battery failed the duration test or function test / Battery is defect or deep discharged / Incorrect battery voltage
Fast flashing red (0,1 sec on – 0,1 sec off)	Charging failure	Incorrect charging current
Double pulsing green	Inhibit mode	Switching into inhibit mode via controller
Green and red off	DC mode	Battery operation (emergency mode)

## 6.3 Commissioning

After installation of the luminaire and initial connection of the mains supply and battery supply to the EM converterLED the unit will commence charging the batteries for the initial charge time. The recharge occurs also if a new battery is connected or the module exits the rest mode condition.

The following automatic commissioning duration test is only performed when a battery is replaced and fully charged.

### 6.4 Testing

#### Commissioning test

A full commissioning test is carried out automatically after permanent connection of the supply for 5 days. The easy commissioning feature will set the initial test day and time to ensure random testing of units.

#### Functional test

Functional tests are carried out for 5 seconds on a weekly basis under the control of the Micro controller. Initiation and timing of these tests is set during the commissioning of the luminaire.

#### Duration test

A full duration test is carried out yearly to check the capacity of the batteries.

For a full description of commissioning and test features please refer to application notes.

#### Test switch

An optional test switch can be wired to each EM converterLED. This can be used to:

- Initiate a 5 seconds function test: press 200 ms < T < 1 s
- Execute function test as long as switch pressed: press > 1 s
- Reset selftest timer (adjust local timing): press > 10 s

#### Timer reset functionality

The timer for function and duration test can be set to a particular time of the day by either pressing the test switch for longer than 10 seconds or cycling the unswitched line supply 5 times within 1 minute. The timer adjustment will enable the test start time to be defined manually at time in day when the timer was reset. It will also disable the adaptive test algorithm thereby forcing the unit to perform the test at the same time rather than it being defined by the adaptive algorithm. This function will only work provided the interval time is greater than zero (automatic test mode enabled). The delay timer value set when the unit was commissioned will be reloaded in order to randomise the tests between adjacent units.

The factory programmed delay offset (1 – 28 days) will be loaded after the reset into the delay timer for the function and duration test in order to randomize the tests between adjacent units.

#### Rest Mode / Inhibit Mode

Emergency operation is automatically started when the mains supply is switched off. If the Rest Mode is activated, the discharging of the battery will be minimized by switching off the LED output. If the Inhibit Mode has been activated before the mains supply is switched off, Rest Mode will be automatically activated if the mains supply is switched off within 15 minutes. Rest Mode and Inhibit Mode can be initiated by applying a short pulse between 9.5 and 22.5 V<sub>DC</sub> in amplitude for a period of 150 to 1,000 ms. This pulse shall be applied to terminals marked Rest.

After a mains reset the EM converterLED exits the Rest Mode. Rest Mode and Inhibit Mode can both be disabled by applying a voltage pulse of 1,000 to 2,000 ms to the terminals marked as Rest to send the RE-LIGHT / RESET INHIBIT command.

Rest Mode / Inhibit Mode are not supported from EM converterLED in case of combination with a 1-cell LiFePO<sub>4</sub> battery and 2-cell NiMH battery.

Pulse/Mode	Standby	Emergency	Rest
150 – 1,000 ms	Inhibit	Rest	–
1,000 – 2,000 ms	Cancel inhibit	–	Re-light

## 7. Battery data

### 7.1 Battery selection

EM converterLED ST, 1 / 2 / 3 h

			Type	EM converterLED ST 202A MH/LiFePO4 250V		EM converterLED ST 203 MH/LiFePO4 250V		EM converterLED ST 204 MH/LiFePO4 250V		EM converterLED ST 205 MH/LiFePO4 250V	
			Article no.	89800901		89800634		89800635		89800636	
			Duration	1 h	2/3 h	1 h	2/3 h	1 h	2/3 h	1 h	2/3 h
Technology and capacity	Design	Number of cells	Type	Article no.		Assignable batteries					
NiMH 4.0 Ah LA cells	stick	1 x 3	Accu-NiMH 3A CON	89800441	•		•				
	stick	1 x 4	Accu-NiMH 4A CON	89800442					•		
	stick + stick	2 + 2	Accu-NiMH 4C CON	89800438					•		
	stick + stick	2 + 3	Accu-NiMH 5C CON	89800439							•
	remote box	1 x 3	Pack-NiMH 4Ah 3 CON	28001896	•		•				
	remote box	1 x 4	Pack-NiMH 4Ah 4 CON	28001897					•		
LiFePO <sub>4</sub> 1.5 Ah 18650 cells	stick	1 x 1	Accu-LiFePO4 1A CON	28002317	•						
	stick	1 x 2	Accu-LiFePO4 2A CON	28002318			•		•		•
	stick	1 x 3	Accu-LiFePO4 3A CON	28002320		•					
	stick	1 x 4	Accu-LiFePO4 4A CON	28002322				•			
	stick	1 x 5	Accu-LiFePO4 5A CON	28002325						•	
	stick	1 x 6	Accu-LiFePO4 6A CON	28002328							•
	stick + stick	2 + 2	Accu-LiFePO4 4C CON	28002324				•			
	stick + stick	2 + 3	Accu-LiFePO4 5C CON	28002327						•	
	stick + stick	3 + 3	Accu-LiFePO4 6C CON	28002330							•
	side by side	2 x 1	Accu-LiFePO4 2B CON	28002319			•		•		•
	side by side	3 x 1	Accu-LiFePO4 3B CON	28002321		•					
	side by side	4 x 1	Accu-LiFePO4 4B CON	28002323				•			
	side by side	5 x 1	Accu-LiFePO4 5B CON	28002326						•	
	side by side	6 x 1	Accu-LiFePO4 6B CON	28002329							•
	remote box	1 x 2	PACK-LiFePO4 3.0Ah 2 CON	28003805			•		•		•
	remote box	1 x 3	PACK-LiFePO4 4.5Ah 3 CON	28003806		•					
	remote box	1 x 4	PACK-LiFePO4 6.0Ah 4 CON	28003807				•			

## 7.2 Battery charge / discharge data

## EM converterLED ST, 1 / 2 / 3 h, NiMH

Type	EM converterLED ST 202A MH/LiFePO <sub>4</sub> 250V		EM converterLED ST 203 MH/LiFePO <sub>4</sub> 250V		EM converterLED ST 204 MH/LiFePO <sub>4</sub> 250V		EM converterLED ST 205 MH/LiFePO <sub>4</sub> 250V	
	Article no.		Article no.		Article no.		Article no.	
	Duration		Duration		Duration		Duration	
	1 h	2/3 h	1 h	2/3 h	1 h	2/3 h	1 h	2/3 h
Battery charge time	Initial charge							
	20 h							
	Fast recharge							
	10 h	15 h	10 h	15 h	10 h	15 h	10 h	15 h
Charging current	Trickle charge							
	continuously							
	Initial charge							
	110 – 150 mA	280 – 320 mA	110 – 150 mA	280 – 320 mA	110 – 150 mA	280 – 320 mA	110 – 150 mA	280 – 320 mA
Charging current	Fast recharge							
	190 – 230 mA	310 – 350 mA	190 – 230 mA	310 – 350 mA	190 – 230 mA	310 – 350 mA	190 – 230 mA	310 – 350 mA
	Trickle charge							
	110 – 150 mA / 4 min.	180 – 220 mA / 4 min.	110 – 150 mA / 4 min.	180 – 220 mA / 4 min.	110 – 150 mA / 4 min.	180 – 220 mA / 4 min.	110 – 150 mA / 4 min.	180 – 220 mA / 4 min.
	0 mA / 16 min.	0 mA / 16 min.	0 mA / 16 min.	0 mA / 16 min.	0 mA / 16 min.	0 mA / 16 min.	0 mA / 16 min.	0 mA / 16 min.
Discharge current		750 – 800 mA	750 – 800 mA	800 – 860 mA	800 – 860 mA	810 – 870 mA	810 – 870 mA	820 – 880 mA
Charge voltage range <sup>®</sup>		0.9 – 1.65 V per cell						
Discharge voltage range		1.65 – 1.05 V per cell						

<sup>®</sup> The battery will be charged below 0.9 V. The EM converterLED will indicate a battery fault.

The emergency lighting LED driver will recharge the battery normally after running the test of 61347-2-7 CL 22.3 (abnormal operating conditions).

EM converterLED ST, 1 / 2 / 3 h, LiFePO<sub>4</sub>

Type	EM converterLED ST 202A MH/LiFePO <sub>4</sub> 250V		EM converterLED ST 203 MH/LiFePO <sub>4</sub> 250V		EM converterLED ST 204 MH/LiFePO <sub>4</sub> 250V		EM converterLED ST 205 MH/LiFePO <sub>4</sub> 250V	
	Article no.		Article no.		Article no.		Article no.	
	Duration		Duration		Duration		Duration	
	1 h	2/3 h	1 h	2/3 h	1 h	2/3 h	1 h	2/3 h
Battery charge time	Initial charge							
	24 h							
	Fast recharge							
	24 h							
Charging current	Trickle charge							
	continuously and battery voltage controlled							
	Initial charge							
	115 – 155 mA	250 – 290 mA	250 – 290 mA	430 – 470 mA	250 – 290 mA	430 – 470 mA	250 – 290 mA	430 – 470 mA
Charging current	Fast recharge							
	115 – 155 mA	250 – 290 mA	250 – 290 mA	430 – 470 mA	250 – 290 mA	430 – 470 mA	250 – 290 mA	430 – 470 mA
	Trickle charge <sup>®</sup>							
	115 – 155 mA / 0 mA	250 – 290 mA / 0 mA	250 – 290 mA / 0 mA	430 – 470 mA / 0 mA	250 – 290 mA / 0 mA	430 – 470 mA / 0 mA	250 – 290 mA / 0 mA	430 – 470 mA / 0 mA
Discharge current		845 – 905 mA	845 – 905 mA	915 – 985 mA	915 – 985 mA	1,275 – 1,375 mA	1,275 – 1,375 mA	1,695 – 1,825 mA
Charge voltage range <sup>®</sup>		2.0 – 3.65 V						
Discharge voltage range		3.65 – 2.60 V						

<sup>®</sup> Automatic recharge when battery voltage falls below 3.4 V. Charger off (0 mA) when battery voltage exceeds 3.6 V.

Note: Battery protected against operation at excessive temperatures (charging stopped when battery cell temperature < 0 °C or > 60 °C).

The emergency lighting LED driver will recharge the battery normally after running the test of 61347-2-7 CL 22.3 (abnormal operating conditions).

<sup>®</sup> The battery will not be charged below 2.0 V.

### 7.3 Accu-NiMH

#### Capacity 4.0 Ah

International designation	HRMU 19/90
Battery voltage/cell	1.2 V
Cell type	LA
Case temperature range to ensure 4 years design life	+5 °C to +50 °C
Max. short term battery case temperature (shorter than 1 month over the battery lifetime)	70 °C
Max. number discharge cycles	4 cycles per year plus 30 cycles during commissioning
	12 months
Max. storage time	at +5 °C to +25 °C

### 7.4 Accu-LiFePO4

#### Capacity 1.5 Ah

International designation	IFpR 19/66
Battery voltage/cell	3.2 V
Cell type	18650
Case temperature range to ensure 4 years design life	+5 °C to +55 °C
6 years design life	+5 °C to +45 °C
8 years design life	+5 °C to +35 °C
Max. short term battery case temperature (shorter than 1 month over the battery lifetime)	70 °C
Max. number discharge cycles	50 cycles total
Max. storage time	12 months
	at +5 °C to +25 °C

### 7.5 Accupack-NiMH

#### Capacity 4.0 Ah

Battery voltage/cell	1.2 V
Cell type	LAL
Ambient temperature range to ensure 4 years design life tc point	+5 °C to +35 °C
	+40 °C
Max. short term battery case temperature (shorter than 1 month over the battery lifetime)	70 °C
Max. number discharge cycles	4 cycles per year plus 4 cycles during commissioning
	12 months
Max. storage time	

### 7.6 Accupack-LiFePO4

#### Capacity 1.5 Ah

International designation	IFpR 19/66
Battery voltage/cell	3.2 V
Cell type	18650
Case temperature range to ensure 4 years design life	+5 °C to +45 °C
6 years design life	+5 °C to +35 °C
8 years design life	+5 °C to +25 °C
Max. short term battery case temperature (shorter than 1 month over the battery lifetime)	70 °C
Max. number discharge cycles	50 cycles total
Max. storage time	12 months
	at +5 °C to +25 °C

Only use Tridonic batteries.

Comply with UN 38.3 and IEC 62133 (safety testing) protected against over charge, over discharge, charging at excessive temperatures, short-circuit and over current.

### 7.7 Safety

#### 7.7.1 Deep discharge protection

When the battery remains connected without charging for a long period of time after the battery cut off of the driver the battery voltage can still drop. To make sure the cells are not damaged by this voltage drop, the battery protection prevents the battery from further discharge below 2.0 V.

#### 7.7.2 Overcharge protection

If in case of an error or the use of a wrong driver the battery gets overcharged the battery protection will disconnect the battery from the driver at a voltage of 3.9 V. A discharge of the battery is still possible after the protection circuit was triggered to guarantee emergency operation.

#### 7.7.3 Short-circuit protection

In case of a short circuit the battery protection opens the connection to the driver and the output is therefore free of voltage. The output will be reactivated again when the short circuit is removed.

#### 7.7.4 Overtemperature protection

The battery is protected against temporary thermal overheating. If the temperature limit is exceeded the further charging of the battery is no longer possible. The temperature protection is activated below approx. 0 °C and above approx. +60 °C. The discharging of the battery is still possible to guarantee emergency operation.



Battery has built in thermal sensor for safe charging. Mount battery away from heat source.  
Positioning of the thermal sensor see battery data sheet.

### 7.8 Storage, installation and commissioning

Relevant information about storage conditions, installation and commissioning are provided in the battery datasheets.

Activating NiMH batteries:

In order to activate new batteries, 2-3 full charge-discharge cycles could be needed. This activating process is defined by charging (24 h) and discharging (1/2/3 h) of the batteries. If the first duration test fails, please repeat the test after a 24 hour charging period.

## 8. Miscellaneous

### 8.1 Maximum number of switching cycles

EM converterLEDs are tested with 50,000 mains switching cycles of the associated LED driver.

### 8.2 Battery replacement

After a battery replacement and a subsequent full charge cycle (24 h) a duration test is mandatory to prove that with the new battery the rated duration is achieved.

### 8.3 Mains-connected transformers

The EM converterLED does not contain mains-connected windings of transformers.

### 8.4 Additional information

Additional technical information at [www.tridonic.com](http://www.tridonic.com) → Technical Data

Lifetime declarations are informative and represent no warranty claim.  
No warranty if device was opened.