



Module LLE 16mm 2000lm HV ADV6

Modules LLE advanced

Product description

- Ideal for compact linear luminaires designs
- Homogenous illumination thanks to small package distance
- 2 terminals for serial wiring
- Perfectly uniform light, even if several LED modules are used together in a line
- Push terminals for quick and simple wiring of LED module to LED module
- HE ... High Efficiency, NM ... Nominal Mode, HO ... High Output
- Long lifetime: 72,000 hours
- 5 years guarantee (conditions at www.tridonic.com)

Optical properties

- Colour temperatures 3,000 K and 4,000 K
- Useful luminous flux 2,025 lm at Irated and tp = 25 °C
- Efficacy of the LED module 203 lm/W at Irated and tp = 25 °C
- High colour rendering index CRI > 80
- High colour consistency (MacAdam 3)[®]
- Small luminous flux tolerances

Mechanical properties

- Module dimension 16 x 280 mm and 16 x 560 mm
- Simple installation (e.g. clips or screws)

System solution

- Combine Tridonic`s LED modules and dimmable drivers to achieve an outstanding system efficacy (configuration possible via <https://setbuilder.tridonic.com/>)



LLE 16x280mm 2000lm HV ADV6



LLE 16x560mm 4000lm HV ADV6



Standards, page 5

Colour temperatures and tolerances, page 9




Module LLE 16mm 2000lm HV ADV6

Modules LLE advanced


Technical data

Colour consistency ^①	3 SDCM
ESD classification	severity level 2
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Lumen maintenance L70B50	72,000 h
Guarantee	5 year(s)

^① Integral measurement over the complete module.

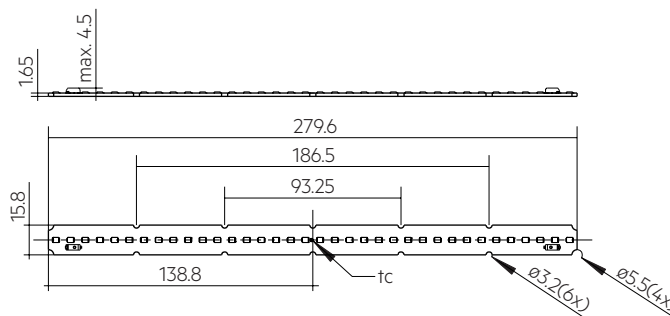

LLE 16x280mm 2000lm HV ADV6

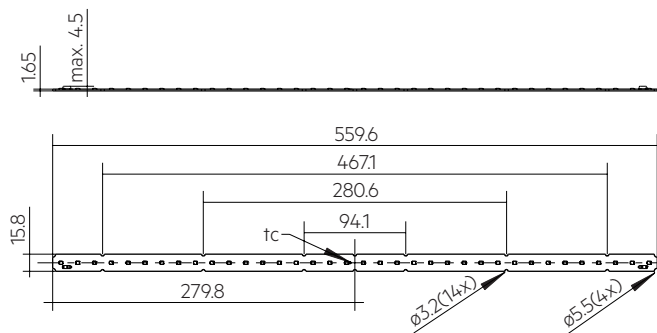

LLE 16x560mm 4000lm HV ADV6

Ordering data

Type	Article number	Article status	Packaging carton	Weight per pc.
LLE 16x280mm 2000lm 830 HV ADV6	28005020	Standard	144 pc(s).	0.014 kg
LLE 16x280mm 2000lm 840 HV ADV6	28005021	Standard	144 pc(s).	0.014 kg
LLE 16x560mm 4000lm 830 HV ADV6	28005022	Standard	144 pc(s).	0.028 kg
LLE 16x560mm 4000lm 840 HV ADV6	28005023	Standard	144 pc(s).	0.028 kg

Photometric data

Type	Colour temperature	Photometric Code ^①	Useful luminous flux at tp = 25 °C ^②	Luminous flux at tp rated ^③			Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Beam characteristic	Colour rendering index CRI
				Min.	Typ.	Max.				
Operating mode HE										
LLE 16x280mm 2000lm 830 HV ADV6	3,000 K	830/359	–	562 lm	624 lm	687 lm	–	197 lm/W	360°	>80
LLE 16x280mm 2000lm 840 HV ADV6	4,000 K	840/359	–	596 lm	662 lm	729 lm	–	209 lm/W	360°	>80
LLE 16x560mm 4000lm 830 HV ADV6	3,000 K	830/359	–	1,124 lm	1,249 lm	1,374 lm	–	197 lm/W	360°	>80
LLE 16x560mm 4000lm 840 HV ADV6	4,000 K	840/359	–	1,192 lm	1,324 lm	1,457 lm	–	209 lm/W	360°	>80
Operating mode NM										
LLE 16x280mm 2000lm 830 HV ADV6	3,000 K	830/359	1,909 lm	1,649 lm	1,832 lm	2,016 lm	192 lm/W	186 lm/W	360°	>80
LLE 16x280mm 2000lm 840 HV ADV6	4,000 K	840/359	2,025 lm	1,749 lm	1,944 lm	2,138 lm	203 lm/W	197 lm/W	360°	>80
LLE 16x560mm 4000lm 830 HV ADV6	3,000 K	830/359	3,818 lm	3,298 lm	3,665 lm	4,031 lm	192 lm/W	186 lm/W	360°	>80
LLE 16x560mm 4000lm 840 HV ADV6	4,000 K	840/359	4,050 lm	3,498 lm	3,887 lm	4,276 lm	203 lm/W	197 lm/W	360°	>80
Operating mode HO										
LLE 16x280mm 2000lm 830 HV ADV6	3,000 K	830/359	–	2,661 lm	2,957 lm	3,253 lm	–	175 lm/W	360°	>80
LLE 16x280mm 2000lm 840 HV ADV6	4,000 K	840/359	–	2,823 lm	3,136 lm	3,450 lm	–	185 lm/W	360°	>80
LLE 16x560mm 4000lm 830 HV ADV6	3,000 K	830/359	–	5,323 lm	5,914 lm	6,506 lm	–	175 lm/W	360°	>80
LLE 16x560mm 4000lm 840 HV ADV6	4,000 K	840/359	–	5,646 lm	6,273 lm	6,900 lm	–	185 lm/W	360°	>80

^① The detailed explanation, see data sheet section 11.

^② Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

^③ Measurement uncertainty ± 10 %. Based on calculation.

Electrical data

Type	Forward current	Min. forward voltage at tp rated	Typ. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C ^①	Energy classification	Energy consumption	Type of light source
Operating mode HE								
LLE 16x280mm 2000lm 830 HV ADV6	100 mA	30.2 V	31.7 V	32.9 V	–	–	–	–
LLE 16x280mm 2000lm 840 HV ADV6	100 mA	30.2 V	31.7 V	32.9 V	–	–	–	–
LLE 16x560mm 4000lm 830 HV ADV6	100 mA	60.5 V	63.4 V	65.9 V	–	–	–	–
LLE 16x560mm 4000lm 840 HV ADV6	100 mA	60.5 V	63.4 V	65.9 V	–	–	–	–
Operating mode NM								
LLE 16x280mm 2000lm 830 HV ADV6	300 mA	31.5 V	32.9 V	34.2 V	10.0 W	C	10 kWh / 1,000 h	non-directional
LLE 16x280mm 2000lm 840 HV ADV6	300 mA	31.5 V	32.9 V	34.2 V	10.0 W	B	10 kWh / 1,000 h	non-directional
LLE 16x560mm 4000lm 830 HV ADV6	300 mA	63.0 V	65.8 V	68.4 V	19.9 W	C	20 kWh / 1,000 h	non-directional
LLE 16x560mm 4000lm 840 HV ADV6	300 mA	63.0 V	65.8 V	68.4 V	19.9 W	B	20 kWh / 1,000 h	non-directional
Operating mode HO								
LLE 16x280mm 2000lm 830 HV ADV6	500 mA	32.5 V	33.9 V	35.2 V	–	–	–	–
LLE 16x280mm 2000lm 840 HV ADV6	500 mA	32.5 V	33.9 V	35.2 V	–	–	–	–
LLE 16x560mm 4000lm 830 HV ADV6	500 mA	64.9 V	67.8 V	70.3 V	–	–	–	–
LLE 16x560mm 4000lm 840 HV ADV6	500 mA	64.9 V	67.8 V	70.3 V	–	–	–	–

^① Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.


Specific technical data

Type	Irated	I _{max}	Max. permissible LF current ripple	Max. permissible peak current / max. pulse width	Max. working voltage for insulation ^①	Electrical strength	ta	tp rated	tc
LLE 16x280mm 2000lm 830 HV ADV6	300 mA	600 mA	700 mA	1,350 mA / 10 ms	320 V	1.64 kV	-40 ... +65 °C	50 °C	95 °C
LLE 16x280mm 2000lm 840 HV ADV6	300 mA	600 mA	700 mA	1,350 mA / 10 ms	320 V	1.64 kV	-40 ... +65 °C	50 °C	95 °C
LLE 16x560mm 4000lm 830 HV ADV6	300 mA	600 mA	700 mA	1,350 mA / 10 ms	320 V	1.64 kV	-40 ... +65 °C	50 °C	95 °C
LLE 16x560mm 4000lm 840 HV ADV6	300 mA	600 mA	700 mA	1,350 mA / 10 ms	320 V	1.64 kV	-40 ... +65 °C	50 °C	95 °C

^① If mounted with M3 screws with 6 mm head diameter and plastic washer.

Product description

- LINEAR COVER for LLE 16
- Protection against direct touch for non-SELV applications
(recommendation: use all fixing points)^①
- Fast snap on mounting on to LLE 16 with clips or plastic washers
- High transmission: transparent 94 %, semi-transparent 87 %, diffuse 76 %
- Linear lense made of PMMA
- Tolerances LINEAR COVER: + 10 mm for 1,600 / 1,200 mm length
(ends raw)

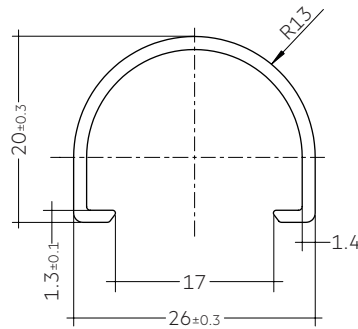

Ordering data

Type	Article number	Colour	Length	Packaging carton	Weight per pc.
ACL LINEAR COVER 16x1600mm FROSTED	28000950	Semi-transparent	1,600 mm	24 pc(s).	0.147 kg
ACL LINEAR COVER 16x1200mm FROSTED	28002827	Semi-transparent	1,200 mm	24 pc(s).	0.117 kg
ACL LINEAR COVER 16x1600mm DIFFUSE	28000951	Diffuse	1,600 mm	24 pc(s).	0.147 kg
ACL LINEAR COVER 16x1200mm DIFFUSE	28002828	Diffuse	1,200 mm	24 pc(s).	0.117 kg

^① Ends must be covered by the luminaire construction.

1. Standards

IEC 62031
IEC 62471
IEC 61000-4-2
IEC 62778
IEC 61547

1.1 Photometric code

Key for photometric code, e. g. 830 / 349

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code CRI	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)
7 70 – 79				Code Luminous flux
8 80 – 89				7 ≥ 70 %
9 ≥90				8 ≥ 80 %
				9 ≥ 90 %

1.2 Risk group

Forward current	Risk group (IEC 62471)
≤ 208 mA	RG0
> 208 – 600 mA (Imax)	RG1

1.3 Energy classification

Type	Colour temperature	Forward current	Energy classification	Energy consumption
LLE 16x280mm 2000lm 830 HV ADV6	3,000 K	300 mA	C	10 kWh / 1,000 h
LLE 16x280mm 2000lm 840 HV ADV6	4,000 K	300 mA	B	10 kWh / 1,000 h
LLE 16x560mm 4000lm 830 HV ADV6	3,000 K	300 mA	C	20 kWh / 1,000 h
LLE 16x560mm 4000lm 840 HV ADV6	4,000 K	300 mA	B	20 kWh / 1,000 h

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

2. Thermal details

2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For LLE a tp temperature of 65 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-40 ... +85 °C
---------------------	----------------

Operation only in non condensing environment.

Humidity during processing of the module should be between 30 to 70 %.

2.3 Heat sink values

LLE 16x280mm 2000lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	65 °C	300 mA	4,64 K/W	144 cm²
25 °C	65 °C	500 mA	1,84 K/W	363 cm²
35 °C	65 °C	300 mA	2,35 K/W	283 cm²
35 °C	65 °C	500 mA	0,67 K/W	990 cm²
40 °C	65 °C	300 mA	1,21 K/W	550 cm²
40 °C	65 °C	500 mA	0,09 K/W	7,269 cm²
45 °C	65 °C	300 mA	0,07 K/W	9,507 cm²

LLE 16x560mm 4000lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	65 °C	300 mA	2,32 K/W	288 cm²
25 °C	65 °C	500 mA	0,92 K/W	726 cm²
35 °C	65 °C	300 mA	1,18 K/W	567 cm²
35 °C	65 °C	500 mA	0,34 K/W	1,980 cm²
40 °C	65 °C	300 mA	0,61 K/W	1,100 cm²
40 °C	65 °C	500 mA	0,05 K/W	14,539 cm²
45 °C	65 °C	300 mA	0,04 K/W	19,014 cm²

Notes

The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. Depending on the heat sink a heat conducting paste or heat conducting film might be necessary to keep the specified tp temperature.

For applications with a small distance between LED module and lens or operating currents higher than 500 mA, screw mounting is recommended to ensure a reliable thermal connection between LED module and cooling surface.

3. Installation / wiring

3.1 Electrical supply/choice of LED driver

LLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED driver from Tridonic in combination with LLE modules guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection

! LLE modules must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module.

Wrong polarity can damage the LLE.

The LLE module is designed for serial wiring.



LLE can be operated either from SELV LED drivers or from LED drivers with LV output voltage.

! LLE are basic insulated up to 320 V (if mounted with M3 screws with head diameter 6 mm in combination with plastic washers) against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED driver (also against earth) is above 320 V, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction. At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

3.2 Wiring




Wiring examples for serial wiring

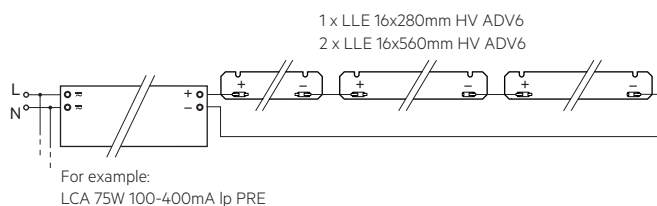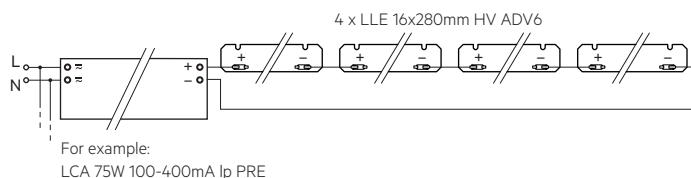

3.3 Wiring type and cross section

For wiring use solid wire from 0.14 to 0.5 mm².

No reconnection with smaller diameters possible if used with >0.34 mm².

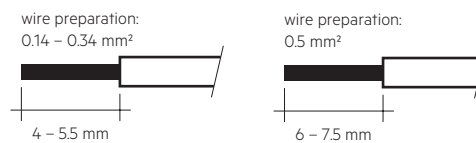

To remove the wires use a suitabel tool (Wago 206-859) or through twist and pull.

3.4 Mounting instruction


! None of the components of the LLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted onto a heat sink with M3 screws with plastic washers or ACL BRIDGE LLE16 PUSH-FIX.

All fastening point must be used for mounting.

The cut-outs on the end faces must not be used for fastening.

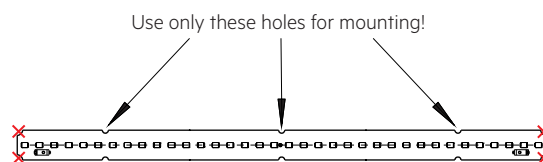

! Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.

3.5 EOS/ESD safety guidelines

! The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

4. Lifetime

4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.
L70 means that the LED module will give 70 % of its initial luminous flux.
This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.
In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

4.2 Lumen maintenance for LLE 16mm HV ADV6

Forward current	tp tempera- ture	L90 / B10	L90 / B50	L80 / B10	L80 / B50	L70 / B10	L70 / B50
100 mA	40 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	50 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	60 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	70 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	80 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	85 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
275 mA	40 °C	61k h	>72k h	>72k h	>72k h	>72k h	>72k h
	50 °C	53k h	71k h	>72k h	>72k h	>72k h	>72k h
	60 °C	39k h	51k h	>72k h	>72k h	>72k h	>72k h
	70 °C	37k h	48k h	>72k h	>72k h	>72k h	>72k h
	80 °C	35k h	45k h	>72k h	>72k h	>72k h	>72k h
	85 °C	34k h	44k h	70k h	>72k h	>72k h	>72k h
600 mA	40 °C	54k h	>72k h	>72k h	>72k h	>72k h	>72k h
	50 °C	47k h	64k h	>72k h	>72k h	>72k h	>72k h
	60 °C	41k h	55k h	>72k h	>72k h	>72k h	>72k h
	70 °C	36k h	48k h	>72k h	>72k h	>72k h	>72k h
	80 °C	31k h	42k h	>72k h	>72k h	>72k h	>72k h
	85 °C	29k h	40k h	>72k h	>72k h	>72k h	>72k h

LOC10 >72k h. At tp rated, based on 10 swiching cycles per day.

4.3 Switching capability

100,000 cycles

Tridonic test according to IEC 62717 Cl 10.3.3
30 s on / 30 s off at Imax

5. Electrical values

5.1 Declaration of electrical parameters

I_{rated} ... Nominal operating current the module is designed for.


I_{max} ... Max. permissible continuous operating current incl. The tolerances of the LED driver.

Max. permissible LF current ripple ... Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.


Max. permissible peak current ... The max. output peak current of the LED driver must not exceed this value.

5.2 Typ. forward voltage vs. forward current

LLE 16x280mm 2000lm 8xx HV ADV6

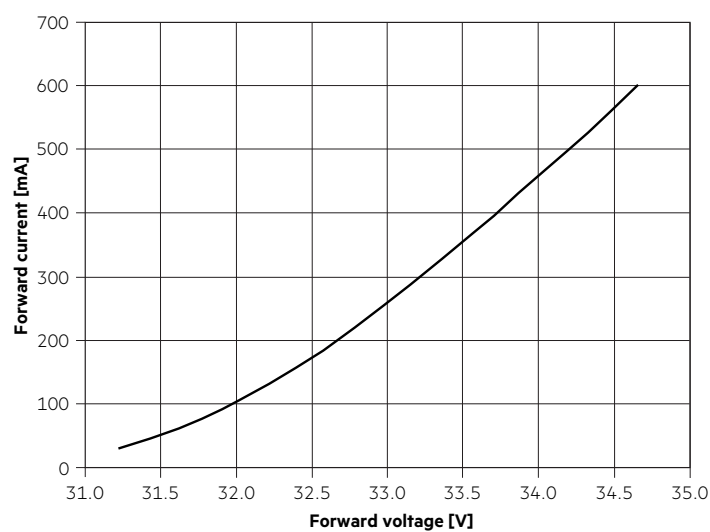


LLE 16x560mm 4000lm 8xx HV ADV6

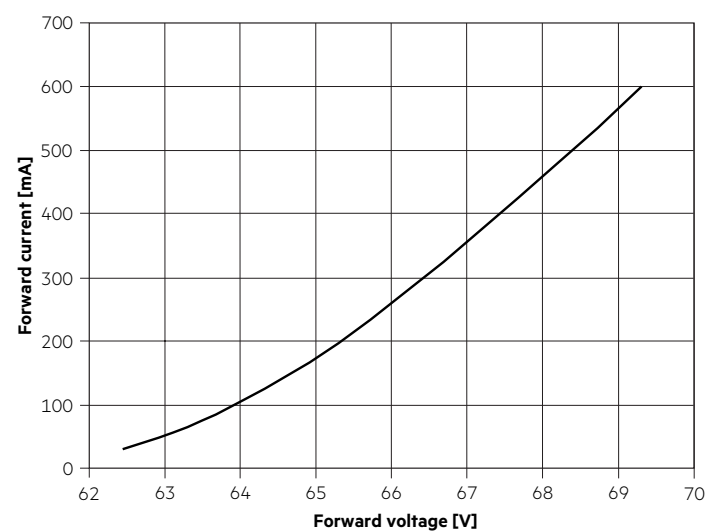

The diagrams are based on statistic values.
The real values can be different.

5.3 Forward voltage vs. t_c temperature

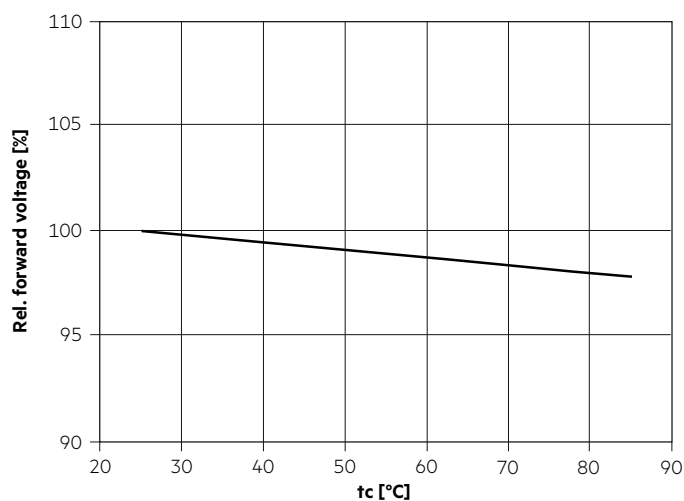

The diagrams are based on statistic values.
The real values can be different.

6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931



The specified colour coordinates are integral measured by current impulse of 195 mA and a duration of 100 ms.

The ambient temperature of the measurement is $t_a = 25^\circ\text{C}$.

The measurement tolerance of the colour coordinates are ± 0.01 .



3,000 K

	x0	y0
Centre	0.4338	0.4030

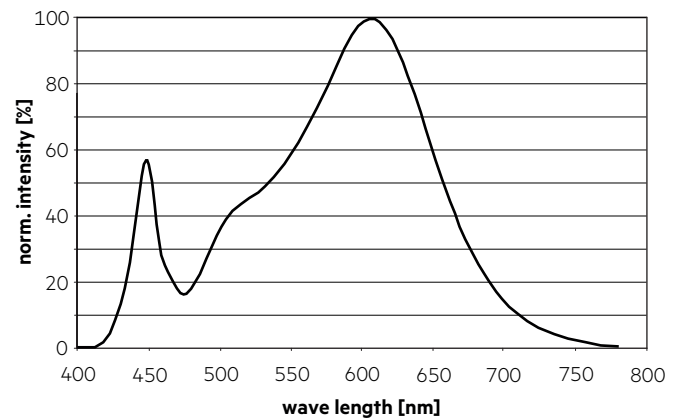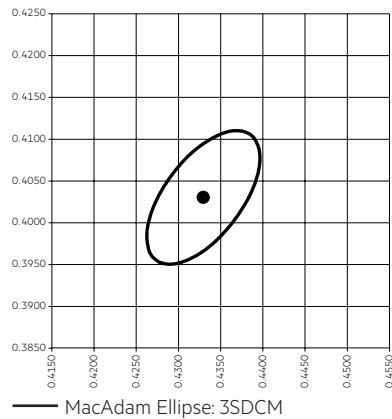


4,000 K

	x0	y0
Center	0.3818	0.3797

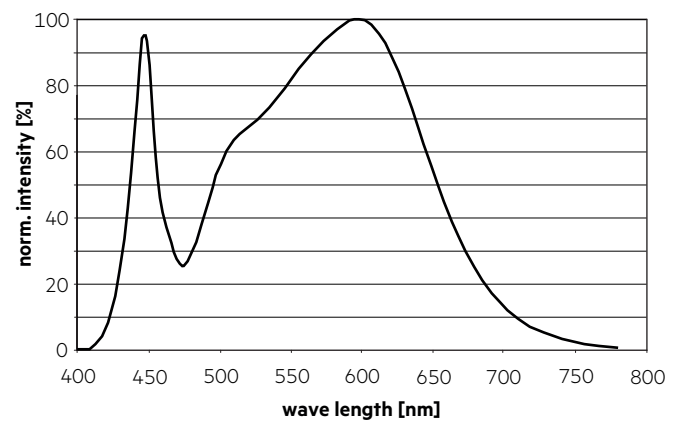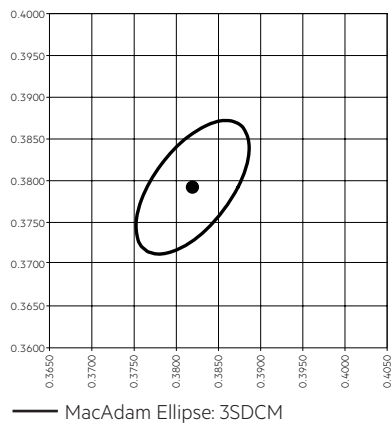


6.2 Light distribution

The optical design of the LLE product line ensures optimum homogeneity for the light distribution.

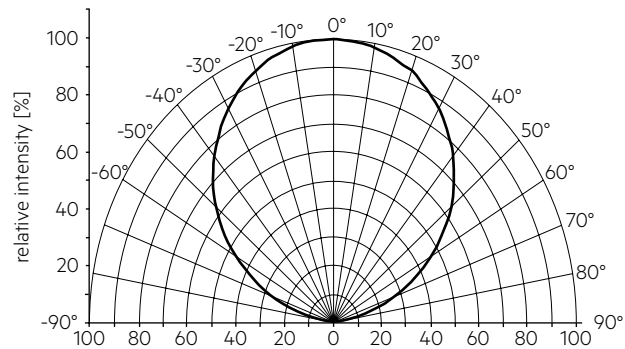


The colour temperature is measured integral over the complete module. The single LED light points can have deviations in the colour coordinates within MacAdam 5. To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 4 cm) should be used.

6.3 Relative luminous flux vs. tc temperature

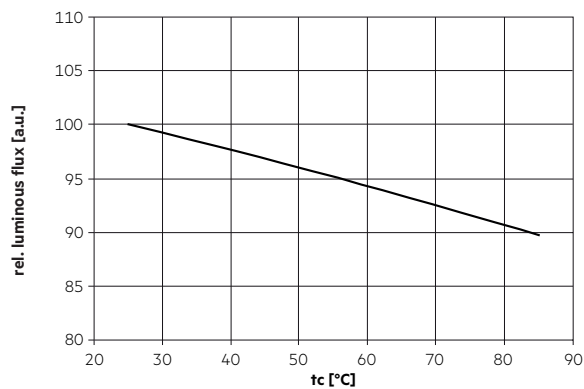

6.4 Relative luminous flux vs. operating current

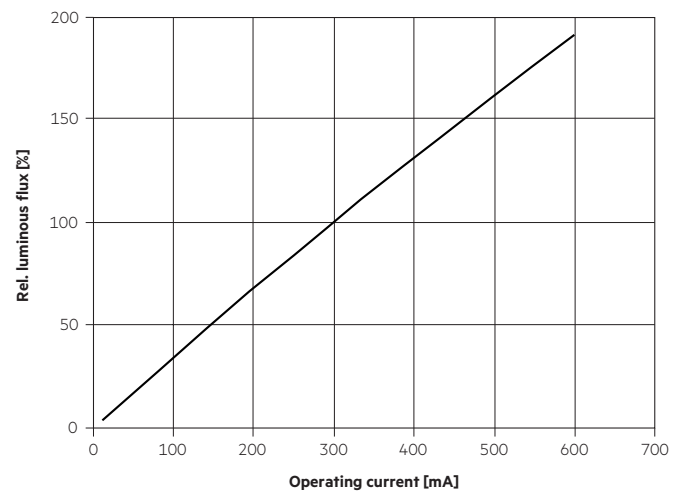

The diagrams are based on statistic values.
The real values can be different.

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Lifetime declarations are informative and represent no warranty claim.