



## Module LLE 16mm 650lm HV ADV6

Modules LLE advanced

### Product description

- Ideal for compact linear luminaires designs
- Homogenous illumination thanks to small package distance
- 2 terminals for serial wiring
- Perfectly uniform light, even if several LED modules are used together in a line
- Push terminals for quick and simple wiring of LED module to LED module
- HE ... High Efficiency, NM ... Nominal Mode, HO ... High Output
- Long lifetime: 72,000 hours
- 5 years guarantee (conditions at [www.tridonic.com](http://www.tridonic.com))

### Optical properties

- Colour temperatures 2,700 K, 3,000 K, 3,500 K, 4,000 K, 5,000 K and 6,500 K
- Useful luminous flux 691 lm at Irated and  $t_p = 25^\circ\text{C}$
- Efficacy of the LED module 211 lm/W at Irated and  $t_p = 25^\circ\text{C}$
- High colour rendering index CRI > 80
- High colour consistency (MacAdam 3)<sup>®</sup>
- Small luminous flux tolerances

### Mechanical properties

- Module dimension 24 x 140 mm, 16 x 280 mm and 16 x 560 mm
- Simple installation (e.g. clips or screws)

### System solution

- Combine Tridonic`s LED modules and dimmable drivers to achieve an outstanding system efficacy (configuration possible via <https://setbuilder.tridonic.com/>)



**Standards**, page 11

**Colour temperatures and tolerances**, page 15



LLE 16x140mm 325lm HV ADV6



LLE 16x280mm 650lm HV ADV6



LLE 16x560mm 1300lm HV ADV6






#### Module LLE 16mm 650lm HV ADV6

Modules LLE advanced


#### Technical data

|                                  |                  |
|----------------------------------|------------------|
| Colour consistency <sup>①</sup>  | 3 SDCM           |
| ESD classification               | severity level 2 |
| Classification acc. to IEC 62031 | Built-in         |
| Type of protection               | IP00             |
| Lumen maintenance L70B50         | 72,000 h         |
| Guarantee                        | 5 year(s)        |


<sup>①</sup> Integral measurement over the complete module.

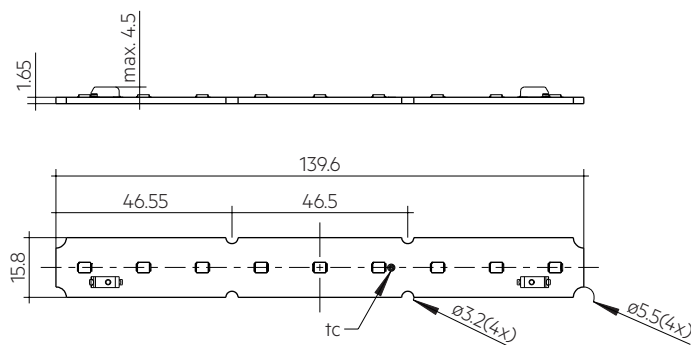

LLE 16x140mm 325lm HV ADV6

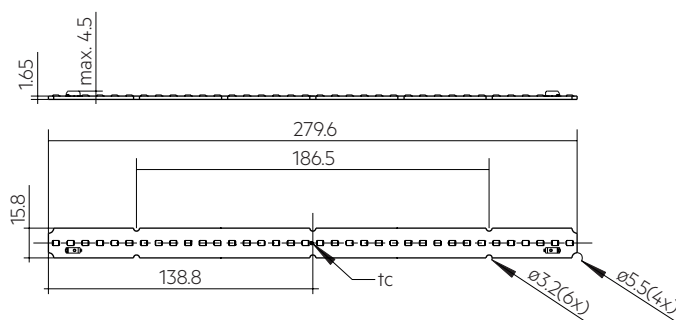

LLE 16x280mm 650lm HV ADV6

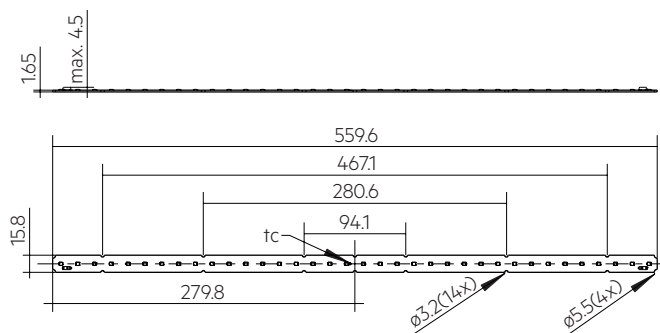

LLE 16x560mm 1300lm HV ADV6

## Module LLE 16mm 650lm HV ADV6

Modules LLE advanced

### Ordering data

| Type                            | Article number | Article status | Packaging carton | Weight per pc. |
|---------------------------------|----------------|----------------|------------------|----------------|
| LLE 16x140mm 325lm 827 HV ADV6  | 28004947       | Standard       | 144 pc(s).       | 0.007 kg       |
| LLE 16x140mm 325lm 830 HV ADV6  | 28004948       | Standard       | 144 pc(s).       | 0.007 kg       |
| LLE 16x140mm 325lm 835 HV ADV6  | 28004949       | Standard       | 144 pc(s).       | 0.007 kg       |
| LLE 16x140mm 325lm 840 HV ADV6  | 28004950       | Standard       | 144 pc(s).       | 0.007 kg       |
| LLE 16x140mm 325lm 850 HV ADV6  | 28004951       | Standard       | 144 pc(s).       | 0.007 kg       |
| LLE 16x140mm 325lm 865 HV ADV6  | 28004952       | Standard       | 144 pc(s).       | 0.007 kg       |
| LLE 16x280mm 650lm 827 HV ADV6  | 28004957       | Standard       | 144 pc(s).       | 0.014 kg       |
| LLE 16x280mm 650lm 830 HV ADV6  | 28004958       | Standard       | 144 pc(s).       | 0.014 kg       |
| LLE 16x280mm 650lm 835 HV ADV6  | 28004959       | Standard       | 144 pc(s).       | 0.014 kg       |
| LLE 16x280mm 650lm 840 HV ADV6  | 28004960       | Standard       | 144 pc(s).       | 0.014 kg       |
| LLE 16x280mm 650lm 850 HV ADV6  | 28004961       | Standard       | 144 pc(s).       | 0.014 kg       |
| LLE 16x280mm 650lm 865 HV ADV6  | 28004962       | Standard       | 144 pc(s).       | 0.014 kg       |
| LLE 16x560mm 1300lm 827 HV ADV6 | 28004970       | Standard       | 144 pc(s).       | 0.028 kg       |
| LLE 16x560mm 1300lm 830 HV ADV6 | 28004971       | Standard       | 144 pc(s).       | 0.028 kg       |
| LLE 16x560mm 1300lm 835 HV ADV6 | 28004972       | Standard       | 144 pc(s).       | 0.028 kg       |
| LLE 16x560mm 1300lm 840 HV ADV6 | 28004973       | Standard       | 144 pc(s).       | 0.028 kg       |
| LLE 16x560mm 1300lm 850 HV ADV6 | 28004974       | Standard       | 144 pc(s).       | 0.028 kg       |
| LLE 16x560mm 1300lm 865 HV ADV6 | 28004975       | Standard       | 144 pc(s).       | 0.028 kg       |

## Photometric data

| Type                            | Colour temperature | Photometric Code <sup>①</sup> | Useful luminous flux at tp = 25 °C <sup>②</sup> | Luminous flux at tp rated <sup>③</sup> |          |          | Efficacy of the module at tp = 25 °C | Expected efficacy of the module at tp rated | Beam characteristic | Colour rendering index CRI |
|---------------------------------|--------------------|-------------------------------|-------------------------------------------------|----------------------------------------|----------|----------|--------------------------------------|---------------------------------------------|---------------------|----------------------------|
|                                 |                    |                               |                                                 | Min.                                   | Typ.     | Max.     |                                      |                                             |                     |                            |
| Operating mode HE               |                    |                               |                                                 |                                        |          |          |                                      |                                             |                     |                            |
| LLE 16x140mm 325lm 827 HV ADV6  | 2,700 K            | 827/359                       | –                                               | 137 lm                                 | 153 lm   | 168 lm   | –                                    | 193 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 830 HV ADV6  | 3,000 K            | 830/359                       | –                                               | 140 lm                                 | 156 lm   | 172 lm   | –                                    | 197 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 835 HV ADV6  | 4,000 K            | 840/359                       | –                                               | 145 lm                                 | 161 lm   | 178 lm   | –                                    | 204 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 840 HV ADV6  | 6,500 K            | 865/359                       | –                                               | 149 lm                                 | 166 lm   | 182 lm   | –                                    | 209 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 850 HV ADV6  | 2,700 K            | 827/359                       | –                                               | 148 lm                                 | 165 lm   | 181 lm   | –                                    | 208 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 865 HV ADV6  | 3,000 K            | 830/359                       | –                                               | 146 lm                                 | 162 lm   | 179 lm   | –                                    | 205 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 827 HV ADV6  | 3,500 K            | 835/359                       | –                                               | 275 lm                                 | 305 lm   | 336 lm   | –                                    | 193 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 830 HV ADV6  | 4,000 K            | 840/359                       | –                                               | 281 lm                                 | 312 lm   | 344 lm   | –                                    | 197 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 835 HV ADV6  | 5,000 K            | 850/359                       | –                                               | 291 lm                                 | 323 lm   | 355 lm   | –                                    | 204 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 840 HV ADV6  | 6,500 K            | 865/359                       | –                                               | 298 lm                                 | 331 lm   | 364 lm   | –                                    | 209 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 850 HV ADV6  | 2,700 K            | 827/359                       | –                                               | 296 lm                                 | 329 lm   | 362 lm   | –                                    | 208 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 865 HV ADV6  | 3,000 K            | 830/359                       | –                                               | 292 lm                                 | 325 lm   | 357 lm   | –                                    | 205 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 827 HV ADV6 | 3,500 K            | 835/359                       | –                                               | 549 lm                                 | 610 lm   | 671 lm   | –                                    | 193 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 830 HV ADV6 | 4,000 K            | 840/359                       | –                                               | 562 lm                                 | 624 lm   | 687 lm   | –                                    | 197 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 835 HV ADV6 | 5,000 K            | 850/359                       | –                                               | 581 lm                                 | 646 lm   | 710 lm   | –                                    | 204 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 840 HV ADV6 | 5,000 K            | 850/359                       | –                                               | 596 lm                                 | 662 lm   | 729 lm   | –                                    | 209 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 850 HV ADV6 | 5,000 K            | 850/359                       | –                                               | 592 lm                                 | 658 lm   | 724 lm   | –                                    | 208 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 865 HV ADV6 | 6,500 K            | 865/359                       | –                                               | 584 lm                                 | 649 lm   | 714 lm   | –                                    | 205 lm/W                                    | 360°                | >80                        |
| Operating mode NM               |                    |                               |                                                 |                                        |          |          |                                      |                                             |                     |                            |
| LLE 16x140mm 325lm 827 HV ADV6  | 2,700 K            | 827/359                       | 318 lm                                          | 275 lm                                 | 305 lm   | 336 lm   | 195 lm/W                             | 189 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 830 HV ADV6  | 3,000 K            | 830/359                       | 326 lm                                          | 281 lm                                 | 313 lm   | 344 lm   | 199 lm/W                             | 193 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 835 HV ADV6  | 4,000 K            | 840/359                       | 337 lm                                          | 291 lm                                 | 323 lm   | 356 lm   | 206 lm/W                             | 200 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 840 HV ADV6  | 6,500 K            | 865/359                       | 345 lm                                          | 298 lm                                 | 331 lm   | 365 lm   | 211 lm/W                             | 205 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 850 HV ADV6  | 2,700 K            | 827/359                       | 343 lm                                          | 296 lm                                 | 329 lm   | 362 lm   | 210 lm/W                             | 204 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 865 HV ADV6  | 3,000 K            | 830/359                       | 339 lm                                          | 292 lm                                 | 325 lm   | 357 lm   | 207 lm/W                             | 201 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 827 HV ADV6  | 3,500 K            | 835/359                       | 636 lm                                          | 550 lm                                 | 611 lm   | 672 lm   | 195 lm/W                             | 189 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 830 HV ADV6  | 4,000 K            | 840/359                       | 651 lm                                          | 562 lm                                 | 625 lm   | 687 lm   | 199 lm/W                             | 193 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 835 HV ADV6  | 5,000 K            | 850/359                       | 673 lm                                          | 582 lm                                 | 646 lm   | 711 lm   | 206 lm/W                             | 200 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 840 HV ADV6  | 6,500 K            | 865/359                       | 691 lm                                          | 597 lm                                 | 663 lm   | 729 lm   | 211 lm/W                             | 205 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 850 HV ADV6  | 2,700 K            | 827/359                       | 686 lm                                          | 593 lm                                 | 659 lm   | 725 lm   | 210 lm/W                             | 203 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 865 HV ADV6  | 3,000 K            | 830/359                       | 677 lm                                          | 585 lm                                 | 650 lm   | 715 lm   | 207 lm/W                             | 201 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 827 HV ADV6 | 3,500 K            | 835/359                       | 1,273 lm                                        | 1,099 lm                               | 1,222 lm | 1,344 lm | 195 lm/W                             | 189 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 830 HV ADV6 | 4,000 K            | 840/359                       | 1,302 lm                                        | 1,125 lm                               | 1,250 lm | 1,375 lm | 199 lm/W                             | 193 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 835 HV ADV6 | 5,000 K            | 850/359                       | 1,346 lm                                        | 1,163 lm                               | 1,292 lm | 1,422 lm | 206 lm/W                             | 200 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 840 HV ADV6 | 5,000 K            | 850/359                       | 1,381 lm                                        | 1,193 lm                               | 1,326 lm | 1,458 lm | 211 lm/W                             | 205 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 850 HV ADV6 | 5,000 K            | 850/359                       | 1,372 lm                                        | 1,185 lm                               | 1,317 lm | 1,449 lm | 210 lm/W                             | 203 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 865 HV ADV6 | 6,500 K            | 865/359                       | 1,354 lm                                        | 1,169 lm                               | 1,299 lm | 1,429 lm | 207 lm/W                             | 201 lm/W                                    | 360°                | >80                        |

<sup>①</sup> The detailed explanation, see data sheet section 1.1.

<sup>②</sup> Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

<sup>③</sup> Measurement uncertainty ± 10 %. Based on calculation.

## Photometric data

| Type                            | Colour temperature | Photometric Code <sup>①</sup> | Useful luminous flux at tp = 25 °C <sup>②</sup> | Luminous flux at tp rated <sup>③</sup> |          |          | Efficacy of the module at tp = 25 °C | Expected efficacy of the module at tp rated | Beam characteristic | Colour rendering index CRI |
|---------------------------------|--------------------|-------------------------------|-------------------------------------------------|----------------------------------------|----------|----------|--------------------------------------|---------------------------------------------|---------------------|----------------------------|
|                                 |                    |                               |                                                 | Min.                                   | Typ.     | Max.     |                                      |                                             |                     |                            |
| Operating mode HO               |                    |                               |                                                 |                                        |          |          |                                      |                                             |                     |                            |
| LLE 16x140mm 325lm 827 HV ADV6  | 2,700 K            | 827/359                       | –                                               | 769 lm                                 | 855 lm   | 940 lm   | –                                    | 166 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 830 HV ADV6  | 3,000 K            | 830/359                       | –                                               | 787 lm                                 | 875 lm   | 962 lm   | –                                    | 170 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 835 HV ADV6  | 4,000 K            | 840/359                       | –                                               | 814 lm                                 | 905 lm   | 995 lm   | –                                    | 175 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 840 HV ADV6  | 6,500 K            | 865/359                       | –                                               | 835 lm                                 | 928 lm   | 1,021 lm | –                                    | 180 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 850 HV ADV6  | 2,700 K            | 827/359                       | –                                               | 830 lm                                 | 922 lm   | 1,014 lm | –                                    | 179 lm/W                                    | 360°                | >80                        |
| LLE 16x140mm 325lm 865 HV ADV6  | 3,000 K            | 830/359                       | –                                               | 819 lm                                 | 910 lm   | 1,001 lm | –                                    | 176 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 827 HV ADV6  | 3,500 K            | 835/359                       | –                                               | 1,539 lm                               | 1,710 lm | 1,881 lm | –                                    | 166 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 830 HV ADV6  | 4,000 K            | 840/359                       | –                                               | 1,575 lm                               | 1,750 lm | 1,925 lm | –                                    | 170 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 835 HV ADV6  | 5,000 K            | 850/359                       | –                                               | 1,628 lm                               | 1,809 lm | 1,990 lm | –                                    | 176 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 840 HV ADV6  | 6,500 K            | 865/359                       | –                                               | 1,670 lm                               | 1,856 lm | 2,041 lm | –                                    | 180 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 850 HV ADV6  | 2,700 K            | 827/359                       | –                                               | 1,659 lm                               | 1,844 lm | 2,028 lm | –                                    | 179 lm/W                                    | 360°                | >80                        |
| LLE 16x280mm 650lm 865 HV ADV6  | 3,000 K            | 830/359                       | –                                               | 1,637 lm                               | 1,819 lm | 2,001 lm | –                                    | 177 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 827 HV ADV6 | 3,500 K            | 835/359                       | –                                               | 3,078 lm                               | 3,420 lm | 3,762 lm | –                                    | 166 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 830 HV ADV6 | 4,000 K            | 840/359                       | –                                               | 3,149 lm                               | 3,499 lm | 3,849 lm | –                                    | 170 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 835 HV ADV6 | 5,000 K            | 850/359                       | –                                               | 3,256 lm                               | 3,618 lm | 3,980 lm | –                                    | 176 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 840 HV ADV6 | 5,000 K            | 850/359                       | –                                               | 3,340 lm                               | 3,711 lm | 4,082 lm | –                                    | 180 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 850 HV ADV6 | 5,000 K            | 850/359                       | –                                               | 3,319 lm                               | 3,687 lm | 4,056 lm | –                                    | 179 lm/W                                    | 360°                | >80                        |
| LLE 16x560mm 1300lm 865 HV ADV6 | 6,500 K            | 865/359                       | –                                               | 3,274 lm                               | 3,638 lm | 4,002 lm | –                                    | 177 lm/W                                    | 360°                | >80                        |

<sup>①</sup> The detailed explanation, see data sheet section 1.1.

<sup>②</sup> Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

<sup>③</sup> Measurement uncertainty ± 10 %. Based on calculation.

## Electrical data

| Type                            | Forward current | Min. forward voltage at tp rated | Typ. forward voltage at tp rated | Max. forward voltage at tp = 25 °C | Power consumption Pon at tp = 25 °C <sup>®</sup> | Energy classification | Energy consumption | Type of light source |
|---------------------------------|-----------------|----------------------------------|----------------------------------|------------------------------------|--------------------------------------------------|-----------------------|--------------------|----------------------|
| <b>Operating mode HE</b>        |                 |                                  |                                  |                                    |                                                  |                       |                    |                      |
| LLE 16x140mm 325lm 827 HV ADV6  | 100 mA          | 7.6 V                            | 7.9 V                            | 8.2 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x140mm 325lm 830 HV ADV6  | 100 mA          | 7.6 V                            | 7.9 V                            | 8.2 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x140mm 325lm 835 HV ADV6  | 100 mA          | 7.6 V                            | 7.9 V                            | 8.2 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x140mm 325lm 840 HV ADV6  | 100 mA          | 7.6 V                            | 7.9 V                            | 8.2 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x140mm 325lm 850 HV ADV6  | 100 mA          | 7.6 V                            | 7.9 V                            | 8.2 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x140mm 325lm 865 HV ADV6  | 100 mA          | 7.6 V                            | 7.9 V                            | 8.2 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 827 HV ADV6  | 100 mA          | 15.1 V                           | 15.8 V                           | 16.5 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 830 HV ADV6  | 100 mA          | 15.1 V                           | 15.8 V                           | 16.5 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 835 HV ADV6  | 100 mA          | 15.1 V                           | 15.8 V                           | 16.5 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 840 HV ADV6  | 100 mA          | 15.1 V                           | 15.8 V                           | 16.5 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 850 HV ADV6  | 100 mA          | 15.1 V                           | 15.8 V                           | 16.5 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 865 HV ADV6  | 100 mA          | 15.1 V                           | 15.8 V                           | 16.5 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 827 HV ADV6 | 100 mA          | 30.2 V                           | 31.7 V                           | 32.9 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 830 HV ADV6 | 100 mA          | 30.2 V                           | 31.7 V                           | 32.9 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 835 HV ADV6 | 100 mA          | 30.2 V                           | 31.7 V                           | 32.9 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 840 HV ADV6 | 100 mA          | 30.2 V                           | 31.7 V                           | 32.9 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 850 HV ADV6 | 100 mA          | 30.2 V                           | 31.7 V                           | 32.9 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 865 HV ADV6 | 100 mA          | 30.2 V                           | 31.7 V                           | 32.9 V                             | –                                                | –                     | –                  | –                    |
| <b>Operating mode NM</b>        |                 |                                  |                                  |                                    |                                                  |                       |                    |                      |
| LLE 16x140mm 325lm 827 HV ADV6  | 200 mA          | 7.7 V                            | 8.1 V                            | 8.4 V                              | 1.6 W                                            | C                     | 2 kWh / 1,000 h    | non-directional      |
| LLE 16x140mm 325lm 830 HV ADV6  | 200 mA          | 7.7 V                            | 8.1 V                            | 8.4 V                              | 1.6 W                                            | B                     | 2 kWh / 1,000 h    | non-directional      |
| LLE 16x140mm 325lm 835 HV ADV6  | 200 mA          | 7.7 V                            | 8.1 V                            | 8.4 V                              | 1.6 W                                            | B                     | 2 kWh / 1,000 h    | non-directional      |
| LLE 16x140mm 325lm 840 HV ADV6  | 200 mA          | 7.7 V                            | 8.1 V                            | 8.4 V                              | 1.6 W                                            | B                     | 2 kWh / 1,000 h    | non-directional      |
| LLE 16x140mm 325lm 850 HV ADV6  | 200 mA          | 7.7 V                            | 8.1 V                            | 8.4 V                              | 1.6 W                                            | B                     | 2 kWh / 1,000 h    | non-directional      |
| LLE 16x140mm 325lm 865 HV ADV6  | 200 mA          | 7.7 V                            | 8.1 V                            | 8.4 V                              | 1.6 W                                            | B                     | 2 kWh / 1,000 h    | non-directional      |
| LLE 16x280mm 650lm 827 HV ADV6  | 200 mA          | 15.5 V                           | 16.2 V                           | 16.8 V                             | 3.3 W                                            | C                     | 4 kWh / 1,000 h    | non-directional      |
| LLE 16x280mm 650lm 830 HV ADV6  | 200 mA          | 15.5 V                           | 16.2 V                           | 16.8 V                             | 3.3 W                                            | C                     | 4 kWh / 1,000 h    | non-directional      |
| LLE 16x280mm 650lm 835 HV ADV6  | 200 mA          | 15.5 V                           | 16.2 V                           | 16.8 V                             | 3.3 W                                            | B                     | 4 kWh / 1,000 h    | non-directional      |
| LLE 16x280mm 650lm 840 HV ADV6  | 200 mA          | 15.5 V                           | 16.2 V                           | 16.8 V                             | 3.3 W                                            | B                     | 4 kWh / 1,000 h    | non-directional      |
| LLE 16x280mm 650lm 850 HV ADV6  | 200 mA          | 15.5 V                           | 16.2 V                           | 16.8 V                             | 3.3 W                                            | B                     | 4 kWh / 1,000 h    | non-directional      |
| LLE 16x280mm 650lm 865 HV ADV6  | 200 mA          | 15.5 V                           | 16.2 V                           | 16.8 V                             | 3.3 W                                            | B                     | 4 kWh / 1,000 h    | non-directional      |
| LLE 16x560mm 1300lm 827 HV ADV6 | 200 mA          | 30.9 V                           | 32.4 V                           | 33.6 V                             | 6.5 W                                            | C                     | 7 kWh / 1,000 h    | non-directional      |
| LLE 16x560mm 1300lm 830 HV ADV6 | 200 mA          | 30.9 V                           | 32.4 V                           | 33.6 V                             | 6.5 W                                            | B                     | 7 kWh / 1,000 h    | non-directional      |
| LLE 16x560mm 1300lm 835 HV ADV6 | 200 mA          | 30.9 V                           | 32.4 V                           | 33.6 V                             | 6.5 W                                            | B                     | 7 kWh / 1,000 h    | non-directional      |
| LLE 16x560mm 1300lm 840 HV ADV6 | 200 mA          | 30.9 V                           | 32.4 V                           | 33.6 V                             | 6.5 W                                            | B                     | 7 kWh / 1,000 h    | non-directional      |
| LLE 16x560mm 1300lm 850 HV ADV6 | 200 mA          | 30.9 V                           | 32.4 V                           | 33.6 V                             | 6.5 W                                            | B                     | 7 kWh / 1,000 h    | non-directional      |
| LLE 16x560mm 1300lm 865 HV ADV6 | 200 mA          | 30.9 V                           | 32.4 V                           | 33.6 V                             | 6.5 W                                            | B                     | 7 kWh / 1,000 h    | non-directional      |

<sup>®</sup> Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.

## Electrical data

| Type                            | Forward current | Min. forward voltage at tp rated | Typ. forward voltage at tp rated | Max. forward voltage at tp = 25 °C | Power consumption Pon at tp = 25 °C <sup>①</sup> | Energy classification | Energy consumption | Type of light source |
|---------------------------------|-----------------|----------------------------------|----------------------------------|------------------------------------|--------------------------------------------------|-----------------------|--------------------|----------------------|
| <b>Operating mode HO</b>        |                 |                                  |                                  |                                    |                                                  |                       |                    |                      |
| LLE 16x140mm 325lm 827 HV ADV6  | 600 mA          | 8.2 V                            | 8.6 V                            | 8.9 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x140mm 325lm 830 HV ADV6  | 600 mA          | 8.2 V                            | 8.6 V                            | 8.9 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x140mm 325lm 835 HV ADV6  | 600 mA          | 8.2 V                            | 8.6 V                            | 8.9 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x140mm 325lm 840 HV ADV6  | 600 mA          | 8.2 V                            | 8.6 V                            | 8.9 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x140mm 325lm 850 HV ADV6  | 600 mA          | 8.2 V                            | 8.6 V                            | 8.9 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x140mm 325lm 865 HV ADV6  | 600 mA          | 8.2 V                            | 8.6 V                            | 8.9 V                              | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 827 HV ADV6  | 600 mA          | 16.5 V                           | 17.2 V                           | 17.8 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 830 HV ADV6  | 600 mA          | 16.5 V                           | 17.2 V                           | 17.8 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 835 HV ADV6  | 600 mA          | 16.5 V                           | 17.2 V                           | 17.8 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 840 HV ADV6  | 600 mA          | 16.5 V                           | 17.2 V                           | 17.8 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 850 HV ADV6  | 600 mA          | 16.5 V                           | 17.2 V                           | 17.8 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x280mm 650lm 865 HV ADV6  | 600 mA          | 16.5 V                           | 17.2 V                           | 17.8 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 827 HV ADV6 | 600 mA          | 32.9 V                           | 34.3 V                           | 35.6 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 830 HV ADV6 | 600 mA          | 32.9 V                           | 34.3 V                           | 35.6 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 835 HV ADV6 | 600 mA          | 32.9 V                           | 34.3 V                           | 35.6 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 840 HV ADV6 | 600 mA          | 32.9 V                           | 34.3 V                           | 35.6 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 850 HV ADV6 | 600 mA          | 32.9 V                           | 34.3 V                           | 35.6 V                             | –                                                | –                     | –                  | –                    |
| LLE 16x560mm 1300lm 865 HV ADV6 | 600 mA          | 32.9 V                           | 34.3 V                           | 35.6 V                             | –                                                | –                     | –                  | –                    |

<sup>①</sup> Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.


## Specific technical data

| Type                                   | I <sub>rated</sub> | I <sub>max</sub> | Max. permissible LF<br>current ripple | Max. permissible peak<br>current / max. pulse<br>width | Max. working voltage<br>for insulation <sup>①</sup> | Electrical strength | t <sub>a</sub> | t <sub>p</sub> rated | t <sub>c</sub> |
|----------------------------------------|--------------------|------------------|---------------------------------------|--------------------------------------------------------|-----------------------------------------------------|---------------------|----------------|----------------------|----------------|
| <b>LLE 16x140mm 325lm 827 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x140mm 325lm 830 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x140mm 325lm 835 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x140mm 325lm 840 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x140mm 325lm 850 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x140mm 325lm 865 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x280mm 650lm 827 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x280mm 650lm 830 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x280mm 650lm 835 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x280mm 650lm 840 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x280mm 650lm 850 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x280mm 650lm 865 HV ADV6</b>  | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x560mm 1300lm 827 HV ADV6</b> | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x560mm 1300lm 830 HV ADV6</b> | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x560mm 1300lm 835 HV ADV6</b> | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x560mm 1300lm 840 HV ADV6</b> | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x560mm 1300lm 850 HV ADV6</b> | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |
| <b>LLE 16x560mm 1300lm 865 HV ADV6</b> | 200 mA             | 700 mA           | 800 mA                                | 1,350 mA / 10 ms                                       | 440 V                                               | 1.88 kV             | -40 ... +65 °C | 50 °C                | 85 °C          |

<sup>①</sup> If mounted with M3 screws with 6 mm head diameter and plastic washer.

**Product description**

- Clip for fixation for LLE16
- Fast snap on mounting (for sheet thickness 0.5 – 1.0 mm)
- For drilling hole 3 mm
- Clip made of polycarbonate
- Minimum sales quantity 200 pcs.

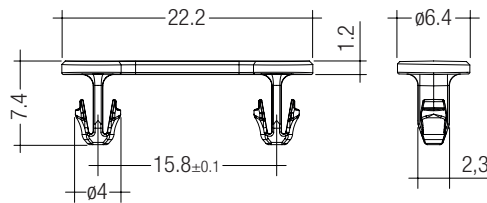


**Ordering data**

| Type                      | Article number | Colour | Packaging bag | Weight per pc. |
|---------------------------|----------------|--------|---------------|----------------|
| ACL BRIDGE LLE16 PUSH-FIX | 28001035       | White  | 200 pc(s).    | 0.001 kg       |

**Product description**

- LINEAR COVER for LLE 16
- Protection against direct touch for non-SELV applications  
(recommendation: use all fixing points)<sup>①</sup>
- Fast snap on mounting on to LLE 16 with clips or plastic washers
- High transmission: transparent 94 %, semi-transparent 87 %, diffuse 76 %
- Linear lense made of PMMA
- Tolerances LINEAR COVER: + 10 mm for 1,600 / 1,200 mm length  
(ends raw)

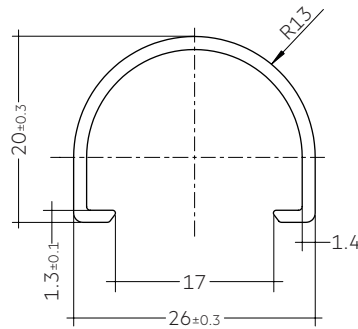

**Ordering data**

| Type                               | Article number | Colour           | Length   | Packaging carton | Weight per pc. |
|------------------------------------|----------------|------------------|----------|------------------|----------------|
| ACL LINEAR COVER 16x1600mm FROSTED | 28000950       | Semi-transparent | 1,600 mm | 24 pc(s).        | 0.147 kg       |
| ACL LINEAR COVER 16x1200mm FROSTED | 28002827       | Semi-transparent | 1,200 mm | 24 pc(s).        | 0.117 kg       |
| ACL LINEAR COVER 16x1600mm DIFFUSE | 28000951       | Diffuse          | 1,600 mm | 24 pc(s).        | 0.147 kg       |
| ACL LINEAR COVER 16x1200mm DIFFUSE | 28002828       | Diffuse          | 1,200 mm | 24 pc(s).        | 0.117 kg       |

<sup>①</sup> Ends must be covered by the luminaire construction.

## 1. Standards

IEC 62031  
IEC 62471  
IEC 61000-4-2  
IEC 62778  
IEC 61547

### 1.1 Photometric code

Key for photometric code, e. g. 830 / 349

| 1 <sup>st</sup> digit | 2 <sup>nd</sup> + 3 <sup>rd</sup> digit | 4 <sup>th</sup> digit | 5 <sup>th</sup> digit                         | 6 <sup>th</sup> digit                               |
|-----------------------|-----------------------------------------|-----------------------|-----------------------------------------------|-----------------------------------------------------|
| Code                  | Colour temperature in Kelvin x 100      | MacAdam initial       | MacAdam after 25% of the lifetime (max.6000h) | Luminous flux after 25% of the lifetime (max.6000h) |
| 7                     | 70 – 79                                 |                       |                                               | Code                                                |
| 8                     | 80 – 89                                 |                       |                                               | Luminous flux                                       |
| 9                     | ≥90                                     |                       |                                               | 7                                                   |
|                       |                                         |                       |                                               | 8                                                   |
|                       |                                         |                       |                                               | 9                                                   |

### 1.2 Risk group

| Forward current       | Risk group (IEC 62471) |
|-----------------------|------------------------|
| ≤ 280 mA              | RG0                    |
| > 280 – 700 mA (Imax) | RG1                    |

### 1.3 Energy classification

| Type                            | Colour temperature | Forward current | Energy classification | Energy consumption |
|---------------------------------|--------------------|-----------------|-----------------------|--------------------|
| LLE 16x140mm 325lm 827 HV ADV6  | 2,700 K            | 200 mA          | C                     | 2 kWh / 1,000 h    |
| LLE 16x140mm 325lm 830 HV ADV6  | 3,000 K            | 200 mA          | B                     | 2 kWh / 1,000 h    |
| LLE 16x140mm 325lm 835 HV ADV6  | 3,500 K            | 200 mA          | B                     | 2 kWh / 1,000 h    |
| LLE 16x140mm 325lm 840 HV ADV6  | 4,000 K            | 200 mA          | B                     | 2 kWh / 1,000 h    |
| LLE 16x140mm 325lm 850 HV ADV6  | 5,000 K            | 200 mA          | B                     | 2 kWh / 1,000 h    |
| LLE 16x140mm 325lm 865 HV ADV6  | 6,500 K            | 200 mA          | B                     | 2 kWh / 1,000 h    |
| LLE 16x280mm 650lm 827 HV ADV6  | 2,700 K            | 200 mA          | C                     | 4 kWh / 1,000 h    |
| LLE 16x280mm 650lm 830 HV ADV6  | 3,000 K            | 200 mA          | C                     | 4 kWh / 1,000 h    |
| LLE 16x280mm 650lm 835 HV ADV6  | 3,500 K            | 200 mA          | B                     | 4 kWh / 1,000 h    |
| LLE 16x280mm 650lm 840 HV ADV6  | 4,000 K            | 200 mA          | B                     | 4 kWh / 1,000 h    |
| LLE 16x280mm 650lm 850 HV ADV6  | 5,000 K            | 200 mA          | B                     | 4 kWh / 1,000 h    |
| LLE 16x280mm 650lm 865 HV ADV6  | 6,500 K            | 200 mA          | B                     | 4 kWh / 1,000 h    |
| LLE 16x560mm 1300lm 827 HV ADV6 | 2,700 K            | 200 mA          | C                     | 7 kWh / 1,000 h    |
| LLE 16x560mm 1300lm 830 HV ADV6 | 3,000 K            | 200 mA          | B                     | 7 kWh / 1,000 h    |
| LLE 16x560mm 1300lm 835 HV ADV6 | 3,500 K            | 200 mA          | B                     | 7 kWh / 1,000 h    |
| LLE 16x560mm 1300lm 840 HV ADV6 | 4,000 K            | 200 mA          | B                     | 7 kWh / 1,000 h    |
| LLE 16x560mm 1300lm 850 HV ADV6 | 5,000 K            | 200 mA          | B                     | 7 kWh / 1,000 h    |
| LLE 16x560mm 1300lm 865 HV ADV6 | 6,500 K            | 200 mA          | B                     | 7 kWh / 1,000 h    |

Energy label and further information at [www.tridonic.com](http://www.tridonic.com) in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

## 2. Thermal details

### 2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For LLE a tp temperature of 50 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

### 2.2 Storage and humidity

|                     |                |
|---------------------|----------------|
| Storage temperature | -40 ... +85 °C |
|---------------------|----------------|

Operation only in non condensing environment.

Humidity during processing of the module should be between 30 to 70 %.

### 2.3 Heat sink values

#### LLE 16x140mm 325lm ADV6

| ta    | tp    | Forward current | R <sub>th, hs-a</sub> | Cooling area |
|-------|-------|-----------------|-----------------------|--------------|
| 25 °C | 50 °C | 200 mA          |                       | self cooling |
| 25 °C | 50 °C | 600 mA          | 8.10 K/W              | 82 cm²       |
| 35 °C | 50 °C | 200 mA          | 22.40 K/W             | 30 cm²       |
| 35 °C | 50 °C | 600 mA          | 4.00 K/W              | 167 cm²      |
| 40 °C | 50 °C | 200 mA          | 14.22 K/W             | 47 cm²       |
| 40 °C | 50 °C | 600 mA          | 1.95 K/W              | 341 cm²      |
| 45 °C | 50 °C | 200 mA          | 6.04 K/W              | 110 cm²      |

#### LLE 16x280mm 650lm ADV6

| ta    | tp    | Forward current | R <sub>th, hs-a</sub> | Cooling area |
|-------|-------|-----------------|-----------------------|--------------|
| 25 °C | 50 °C | 200 mA          |                       | self cooling |
| 25 °C | 50 °C | 600 mA          | 4.05 K/W              | 165 cm²      |
| 35 °C | 50 °C | 200 mA          | 11.20 K/W             | 60 cm²       |
| 35 °C | 50 °C | 600 mA          | 2.00 K/W              | 333 cm²      |
| 40 °C | 50 °C | 200 mA          | 7.11 K/W              | 94 cm²       |
| 40 °C | 50 °C | 600 mA          | 0.98 K/W              | 683 cm²      |
| 45 °C | 50 °C | 200 mA          | 3.02 K/W              | 221 cm²      |

#### LLE 16x560mm 1300lm ADV6

| ta    | tp    | Forward current | R <sub>th, hs-a</sub> | Cooling area |
|-------|-------|-----------------|-----------------------|--------------|
| 25 °C | 50 °C | 225 mA          |                       | self cooling |
| 25 °C | 50 °C | 600 mA          | 2.02 K/W              | 329 cm²      |
| 35 °C | 50 °C | 200 mA          | 5.60 K/W              | 119 cm²      |
| 35 °C | 50 °C | 600 mA          | 1.00 K/W              | 666 cm²      |
| 40 °C | 50 °C | 200 mA          | 3.56 K/W              | 188 cm²      |
| 40 °C | 50 °C | 600 mA          | 0.49 K/W              | 1365 cm²     |
| 45 °C | 50 °C | 200 mA          | 1.51 K/W              | 442 cm²      |

### Notes

The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. Depending on the heat sink a heat conducting paste or heat conducting film might be necessary to keep the specified tp temperature.

For applications with a small distance between LED module and lens or operating currents higher than 500 mA, screw mounting is recommended to ensure a reliable thermal connection between LED module and cooling surface.

### 3. Installation / wiring

#### 3.1 Electrical supply/choice of LED driver

LLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED driver from Tridonic in combination with LLE modules guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection



LLE modules must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module.

Wrong polarity can damage the LLE.

The LLE module is designed for serial wiring.


LLE can be operated either from SELV LED drivers or from LED drivers with LV output voltage.





LLE are basic insulated up to 440 V (if mounted with M3 screws with head diameter 6 mm in combination with plastic washers) against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED driver (also against earth) is above 440 V, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction.

At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

#### 3.2 Wiring




#### Wiring examples for serial wiring

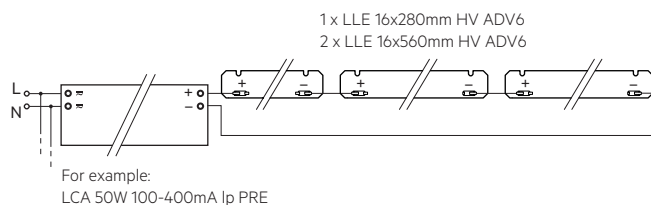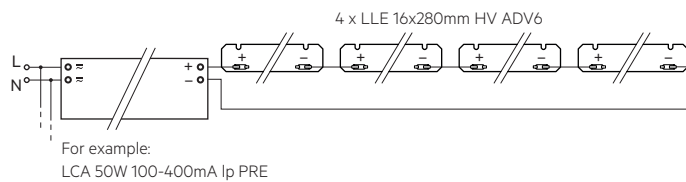

#### 3.3 Wiring type and cross section

For wiring use solid wire from 0.14 to 0.5 mm<sup>2</sup>.  
No reconnection with smaller diameters possible if used with >0.34 mm<sup>2</sup>.



To remove the wires use a suitable tool (Wago 206-859) or through twist and pull.


#### 3.4 Mounting instruction



None of the components of the LLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted onto a heat sink with M3 screws with plastic washers or ACL BRIDGE LLE16 PUSH-FIX. All fastening point must be used for mounting. The cut-outs on the end faces must not be used for fastening.

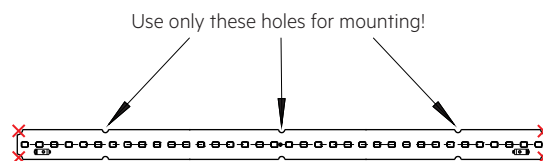

Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.

### 3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline\_EOS\_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

## 4. Lifetime

### 4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.

L70 means that the LED module will give 70 % of its initial luminous flux.

This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.

In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

### 4.2 Lumen maintenance for LLE 16mm HV ADV6

| Forward current | tp<br>tempera-<br>ture |           |           |           |           |           |           |
|-----------------|------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
|                 |                        | L90 / B10 | L90 / B50 | L80 / B10 | L80 / B50 | L70 / B10 | L70 / B50 |
| 100 mA          | 40 °C                  | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 50 °C                  | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 60 °C                  | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 70 °C                  | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 80 °C                  | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 85 °C                  | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    |
| 275 mA          | 40 °C                  | 61k h     | >72k h    | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 50 °C                  | 53k h     | 71k h     | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 60 °C                  | 39k h     | 51k h     | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 70 °C                  | 37k h     | 48k h     | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 80 °C                  | 35k h     | 45k h     | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 85 °C                  | 34kh      | 44k h     | 70k h     | >72k h    | >72k h    | >72k h    |
| 700 mA          | 40 °C                  | 48k h     | 62k h     | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 50 °C                  | 45k h     | 59k h     | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 60 °C                  | 42k h     | 55k h     | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 70 °C                  | 40k h     | 52k h     | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 80 °C                  | 37k h     | 49k h     | >72k h    | >72k h    | >72k h    | >72k h    |
|                 | 85 °C                  | 36k h     | 47k h     | >72k h    | >72k h    | >72k h    | >72k h    |

LOC10 >72k h. At tp rated, based on 10 switching cycles per day.

### 4.3 Switching capability

100,000 cycles

Tridonic test according to IEC 62717 Cl 10.3.3

30 s on / 30 s off at Imax

## 5. Electrical values

### 5.1 Declaration of electrical parameters

Irated ... Nominal operating current the module is designed for.


I<sub>max</sub> ... Max. permissible continuous operating current incl. The tolerances of the LED driver.

Max. permissible LF current ripple ... Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.


Max. permissible peak current ... The max. output peak current of the LED driver must not exceed this value.

### 5.2 Typ. forward voltage vs. forward current


**LLE 16x140mm 325lm 8xx HV ADV6**

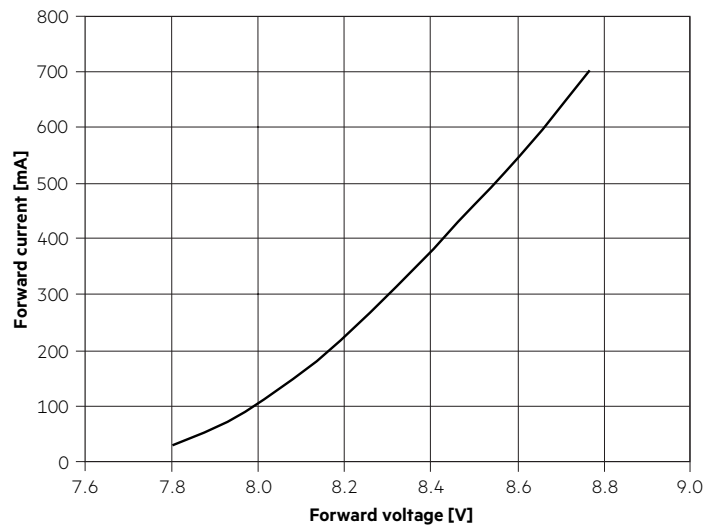


**LLE 16x280mm 650lm 8xx HV ADV6**

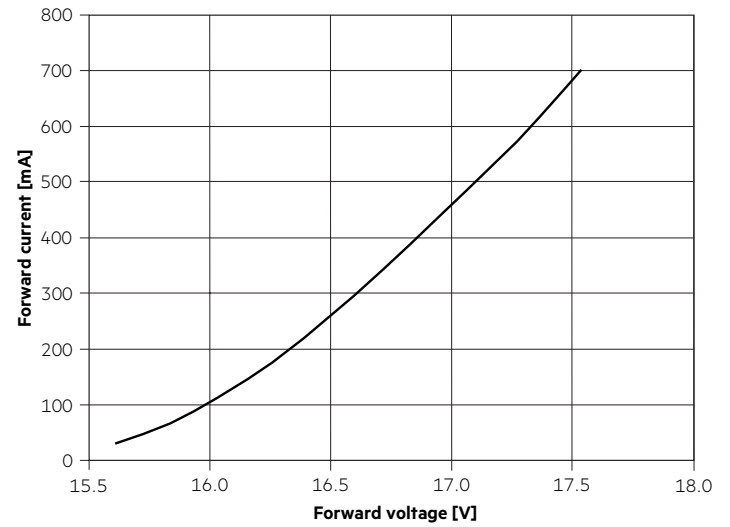

**LLE 16x560mm 1300lm 8xx HV ADV6**

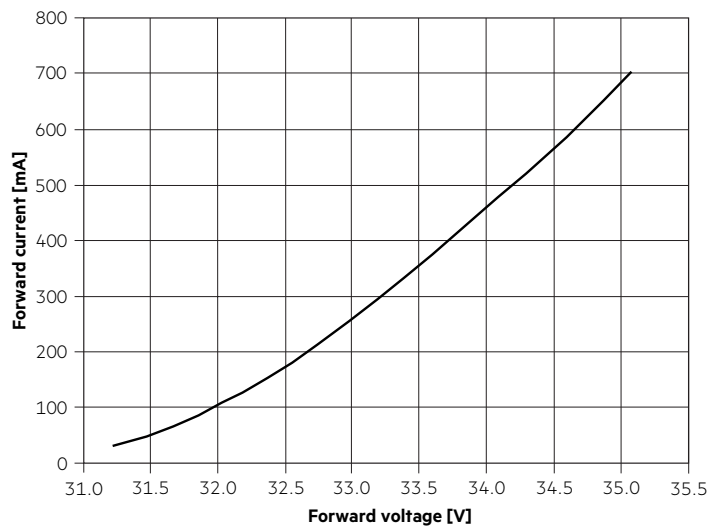

### 5.3 Forward voltage vs. tc temperature

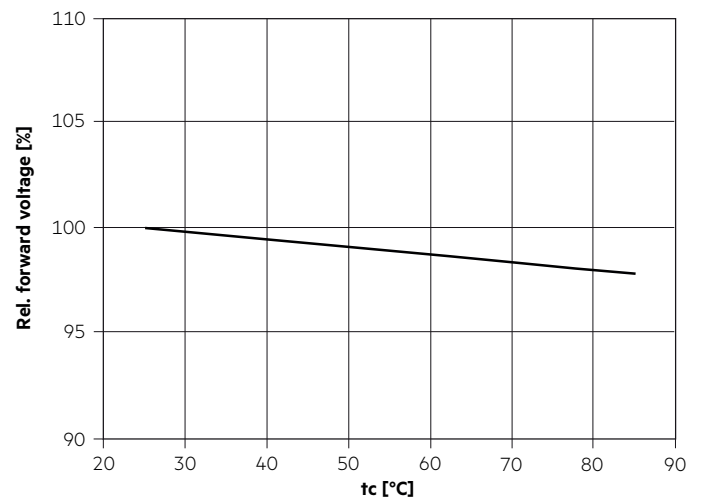

The diagrams are based on statistic values.  
The real values can be different.

## 6. Photometric characteristics

### 6.1 Coordinates and tolerances according to CIE 1931



The specified colour coordinates are integral measured by current impulse of 195 mA and a duration of 100 ms.

The ambient temperature of the measurement is  $t_a = 25^\circ\text{C}$ .

The measurement tolerance of the colour coordinates are  $\pm 0.01$ .



#### 2,700 K

|        | x0     | y0     |
|--------|--------|--------|
| Centre | 0.4578 | 0.4101 |

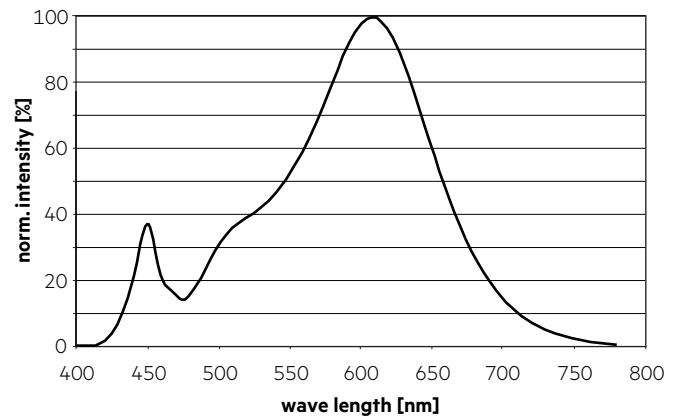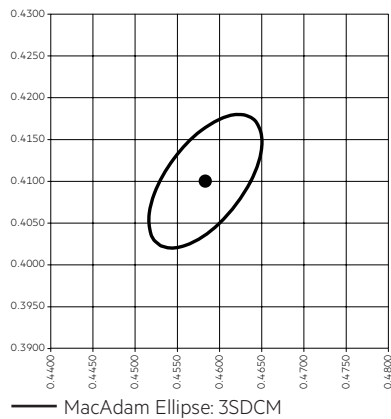



#### 3,000 K

|        | x0     | y0     |
|--------|--------|--------|
| Centre | 0.4338 | 0.4030 |

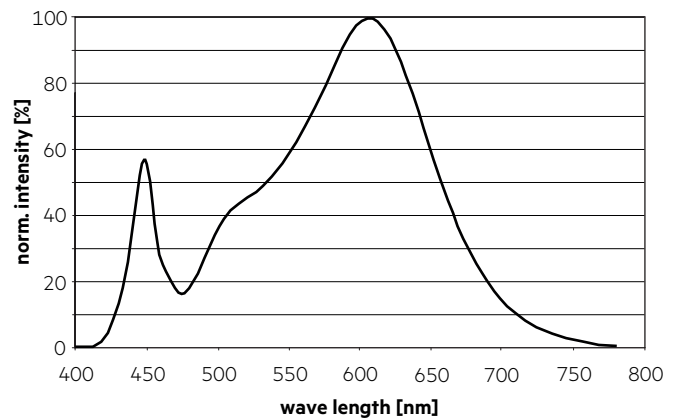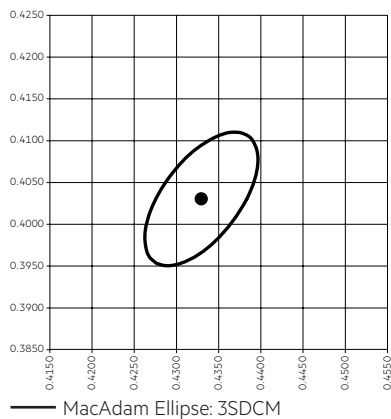


#### 3,500 K

|        | x0     | y0     |
|--------|--------|--------|
| Centre | 0.4073 | 0.3917 |

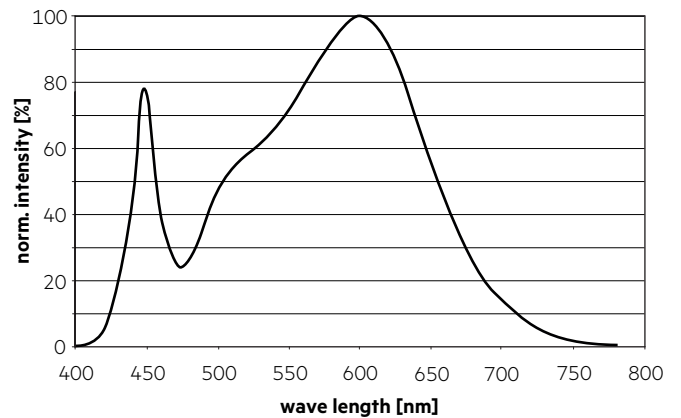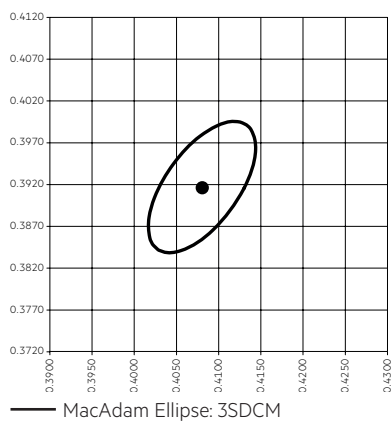


#### 4,000 K

|        | x0     | y0     |
|--------|--------|--------|
| Center | 0.3818 | 0.3797 |

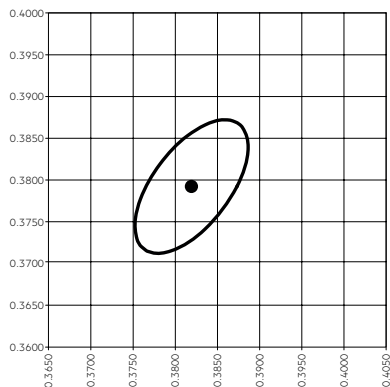


— MacAdam Ellipse: 3SDCM

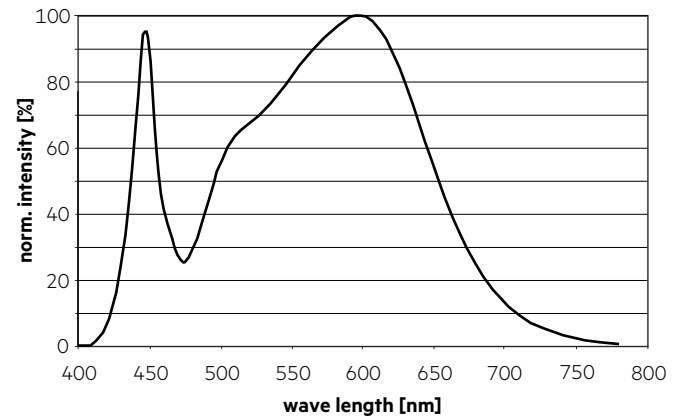


#### 5,000 K

|        | x0     | y0     |
|--------|--------|--------|
| Center | 0.3447 | 0.3553 |

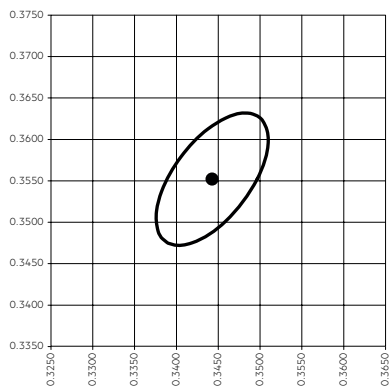


— MacAdam Ellipse: 3SDCM

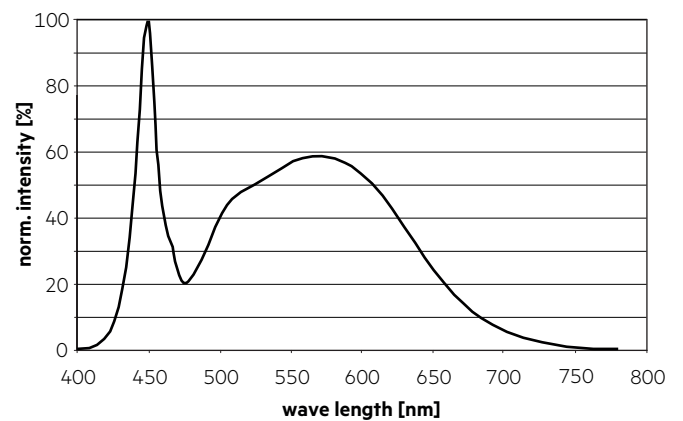


#### 6,500 K

|        | x0     | y0     |
|--------|--------|--------|
| Center | 0.3123 | 0.3282 |

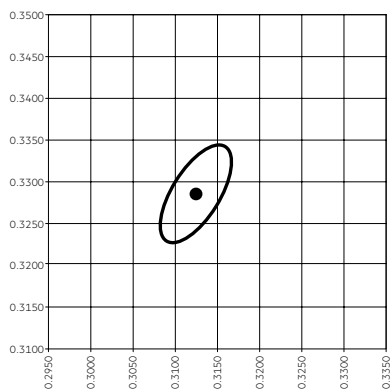


— MacAdam Ellipse: 3SDCM

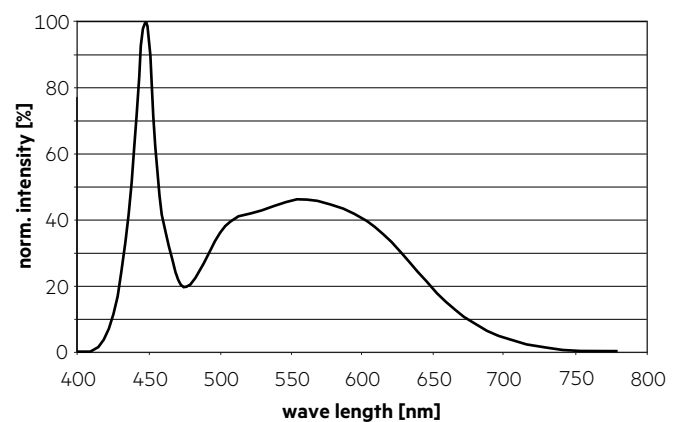


## 6.2 Light distribution

The optical design of the LLE product line ensures optimum homogeneity for the light distribution.

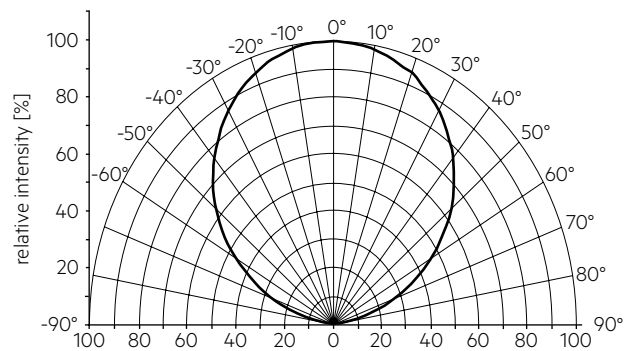


The colour temperature is measured integral over the complete module. The single LED light points can have deviations in the colour coordinates within MacAdam 5. To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 4 cm) should be used.

## 6.3 Relative luminous flux vs. tc temperature

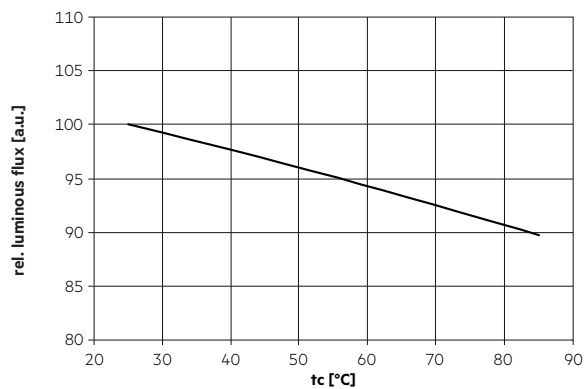

## 6.4 Relative luminous flux vs. operating current

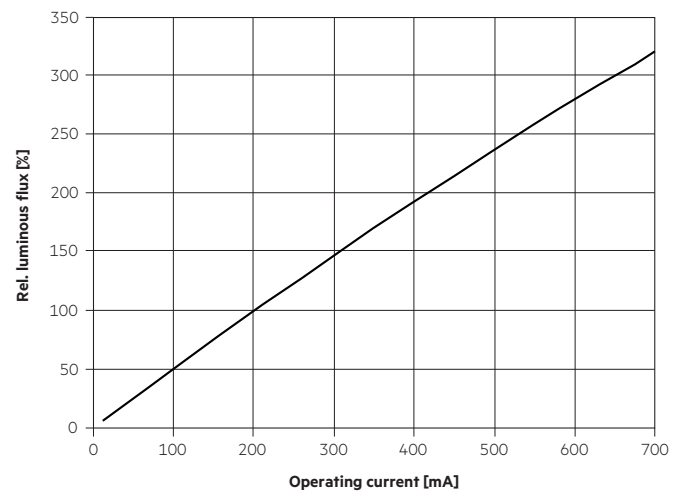

The diagrams are based on statistic values.  
The real values can be different.

## 7. Miscellaneous

### 7.1 Additional information

Additional technical information at [www.tridonic.com](http://www.tridonic.com) → Technical Data

Lifetime declarations are informative and represent no warranty claim.