

LLE G2 premium system data sheet

LLE premium system

Product description

- Linear Tunable White system with adjustable colour temperature from 2,700 to 6,500 K at constant luminous flux
- Precalibrated set to ensure light quality and high colour consistency, consisting of linear low-profile LED driver and 3 to 6 LED modules (700 lm) or 2 to 6 LED modules (1,500 lm)^①
- High colour rendering index CRI > 90
- Outstanding system colour tolerance
- High system efficiency up to 126 lm/W at $t_p = 65^\circ\text{C}$
- Linear LED modules with 700 or 1,500 lm
- Dimming range 3 – 100 % without change of colour temperature
- Long lifetime of 50,000 h and 5-year system guarantee (conditions at www.tridonic.com)

Interfaces

- one4all (DALI DT8, DSI, switchDIM, corridorFUNCTION V2)
- colourSWITCH
- Push terminals for simple wiring

Functions

- Constant light output function (CLO)
- colourSWITCH with predefined colours
- switchDIM and colourSWITCH with memory function
- Power-up fading and fade2zero
- Configurable via DALI
- Protective features (overtemperature, short-circuit, overload, no-load, reduced surge amplification)
- Suitable for emergency lighting acc. to EN 50172

Typical applications

- For linear lighting in office applications
- Tunable white application



Technical data module LLE premium, page 3

Product description module LLE premium, page 13–19

Technical data Driver LCA 50/100W DT8, page 4–6

Product description Driver LCA 50/100W DT8, page 20–27

Accessories, page 7–12



Ordering data

Type	Article number	System components
LLE G2 24x280MM 3x700LM 927-965 LV PRE	89602931	LCA 50W PRE + 3 LED modules at 700 lm
LLE G2 24x280MM 4x700LM 927-965 LV PRE	89602932	LCA 50W PRE + 4 LED modules at 700 lm
LLE G2 24x280MM 5x700LM 927-965 LV PRE	89602933	LCA 50W PRE + 5 LED modules at 700 lm
LLE G2 24x280MM 6x700LM 927-965 LV PRE	89602934	LCA 50W PRE + 6 LED modules at 700 lm
LLE G2 24x280MM 2x1500LM 927-965 LV PRE	89602935	LCA 50W PRE + 2 LED modules at 1,500 lm
LLE G2 24x280MM 3x1500LM 927-965 LV PRE	89602936	LCA 50W PRE + 3 LED modules at 1,500 lm
LLE 24X280MM 4X1500LM 927-965 LV PRE2	28003303	LCA 85W PRE + 4 LED modules at 1,500 lm
LLE 24X280MM 5X1500LM 927-965 LV PRE2	28003304	LCA 85W PRE + 5 LED modules at 1,500 lm
LLE G2 24x280MM 6x1500LM 927-965 LV PRE	89602939	LCA 100W PRE + 6 LED modules at 1,500 lm

Specific technical data

Type	Typ. luminous flux at tp = 25 °C ^②	Typ. luminous flux at tp = 65 °C ^②	Typ. power consumption at tp = 65 °C ^③	Efficacy of the system at tp = 25 °C ^④	Efficacy of the system at tp = 65 °C ^④	Colour rendering index CRI	Energy classification
700 lm module							
LLE G2 24x280MM 3x700LM 927-965 LV PRE	2,220 lm	2,100 lm	19.3 W	123 lm/W	117 lm/W	> 90	A+
LLE G2 24x280MM 4x700LM 927-965 LV PRE	2,960 lm	2,800 lm	24.8 W	128 lm/W	121 lm/W	> 90	A+
LLE G2 24x280MM 5x700LM 927-965 LV PRE	3,700 lm	3,500 lm	30.1 W	131 lm/W	124 lm/W	> 90	A+
LLE G2 24x280MM 6x700LM 927-965 LV PRE	4,440 lm	4,200 lm	36.1 W	132 lm/W	125 lm/W	> 90	A+
1,500 lm module							
LLE G2 24x280MM 2x1500LM 927-965 LV PRE	3,170 lm	3,000 lm	26.9 W	126 lm/W	120 lm/W	> 90	A+
LLE G2 24x280MM 3x1500LM 927-965 LV PRE	4,760 lm	4,500 lm	38.6 W	132 lm/W	125 lm/W	> 90	A+
LLE 24X280MM 4X1500LM 927-965 LV PRE2	6,340 lm	6,000 lm	48.1 W	143 lm/W	134 lm/W	> 90	A+
LLE 24X280MM 5X1500LM 927-965 LV PRE2	7,920 lm	7,500 lm	59.7 W	144 lm/W	136 lm/W	> 90	A+
LLE G2 24x280MM 6x1500LM 927-965 LV PRE	9,510 lm	9,000 lm	77.1 W	134 lm/W	126 lm/W	> 90	A+

^① Mixing of components from different sets is not allowed due to the pre-calibration of the system.

^② Tolerance range for optical data over the CCT range: ±5 %.

^③ Tolerance range for electrical data: ±5 %.


^④ Measured at 4,000 K.



Module LLE G2 premium
LLE premium system

Technical data

Beam characteristic	120°
Ambient temperature ta [®]	-25 ... +55 °C
tp rated	65 °C
tc	85 °C
Irated for 700 lm	125 mA
Irated for 1,500 lm	275 mA
I _{max} for 700 lm	165 mA
I _{max} for 1,500 lm	330 mA
Max. permissible LF current ripple for 700 lm	185 mA
Max. permissible LF current ripple for 1,500 lm	360 mA
Max. permissible peak current for 700 lm	240 mA / max. 10 ms
Max. permissible peak current for 1,500 lm	480 mA / max. 10 ms
Max. working voltage for insulation SELV [®]	60 V
Insulation test voltage	0.5 kV
CTI of the printed circuit board	≥ 600
ESD classification	severity level 1
Risk group (IEC 62471)	RG0
Classification acc. to IEC 62031	Built-in
Type of protection	IPO0
Lifetime	up to 50,000 h
Guarantee	5 years

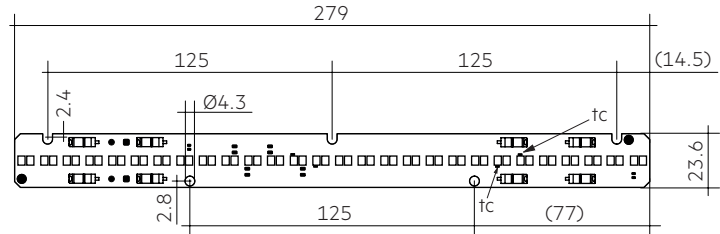

Specific technical data

Type	Channel	Photometric code	Typ. luminous flux at tp = 25 °C ^①	Typ. luminous flux at tp = 65 °C ^①	Typ. forward current ^②	Min. forward voltage at tp = 65 °C ^②	Max. forward voltage at tp = 25 °C ^②	Typ. power consumption at tp = 65 °C ^②	Efficacy of the module at tp = 25 °C	Efficacy of the module at tp = 65 °C	Colour rendering index CRI
TW LLE G2 24x280MM 700LM 927-965 PRE	WW	927/349	730 lm	690 lm	125 mA	39.3 V	43.8 V	5.2 W	137 lm/W	132 lm/W	90
	CW	965/349	810 lm	770 lm	125 mA	39.3 V	43.8 V	5.2 W	152 lm/W	147 lm/W	90
TW LLE G2 24x280MM 1500LM 927-965 PRE	WW	927/349	1,590 lm	1,510 lm	275 mA	39.8 V	44.3 V	11.6 W	134 lm/W	130 lm/W	90
	CW	965/349	1,780 lm	1,680 lm	275 mA	39.8 V	44.3 V	11.6 W	149 lm/W	145 lm/W	90

^① Tolerance range for optical data over the CCT range: ±5 %.

^② Tolerance range for electrical data: ±5 %.

^③ Mounted with M4 screws with plastic washers.


IP20 SELV ENEC RoHS

Driver LCA 50W 350-1050mA DT8 Ip PRE

LLÉ premium system

Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 264 V
DC voltage range	176 – 280 V
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 48 h
Typ. current (at 230 V, 50 Hz, full load) ^① ②	105 – 252 mA
Typ. current (220 V, 0 Hz, full load, 15 % dimming level) ^②	47 mA
Leakage current (at 230 V, 50 Hz, full load) ^① ②	< 500 µA
Typ. efficiency (at 230 V / 50 Hz / full load) ^②	89 %
λ (at 230 V, 50 Hz, full load) ^①	> 0.97
Typ. power input on stand-by ^③	< 0.25 W
Typ. input current in no-load operation	22 mA
Typ. input power in no-load operation	0.5 W
In-rush current (peak / duration)	29 A / 180 µs
THD (at 230 V, 50 Hz, full load) ^①	< 10 %
Time to light (at 230 V, 50 Hz, full load) ^①	< 0.6 s
Time to light (DC mode)	< 0.3 s
Switchover time (AC/DC) ^②	< 0.2 s
Turn off time (at 230 V, 50 Hz, full load)	< 20 ms
Output current tolerance ^① ⑥	± 3 %
Max. output current peak (non-repetitive)	≤ output current + 20 %
Output LF current ripple (< 120 Hz)	± 4 %
Max. output voltage (no-load voltage)	60 V
Dimming range	3 – 100 %
Colour tuning range	2,700 – 6,500 K
Mains surge capability (between L – N)	1 kV
Mains surge capability (between L/N – PE)	2 kV
Surge voltage at output side (against PE)	< 500 V
Lifetime	up to 100,000 h
Dimensions L x W x H	360 x 30 x 21 mm

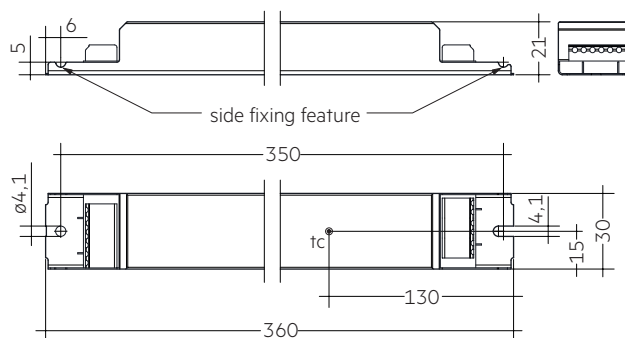


IP20 SELV      RoHS

Driver LCA 85W 600–1800mA DT8 Ip PRE
LLE premium system

Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 264 V
DC voltage range	176 – 280 V
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 48 h
Typ. current (at 230 V, 50 Hz, full load) ^① ^②	162 – 420 mA
Typ. current (220 V, 0 Hz, full load, 15 % dimming level) ^②	77 mA
Leakage current (at 230 V, 50 Hz, full load) ^① ^②	< 330 µA
Typ. efficiency (at 230 V / 50 Hz / full load) ^②	90 %
λ (at 230 V, 50 Hz, full load) ^①	> 0.98
Typ. power input on stand-by ^③	< 0.25 W
Typ. input current in no-load operation	25 mA
Typ. input power in no-load operation	< 0.5 W
In-rush current (peak / duration)	315 A / 215 µs
THD (at 230 V, 50 Hz, full load) ^①	< 10 %
Starting time (at 230 V, 50 Hz, full load) ^①	< 0.6 s
Starting time (DC mode)	< 0.4 s
Switchover time (AC/DC) ^②	< 0.2 s
Turn off time (at 230 V, 50 Hz, full load)	< 20 ms
Output current tolerance ^① ^②	± 3 %
Max. output current peak (non-repetitive)	≤ output current + 20 %
Output LF current ripple (< 120 Hz)	± 2.5 %
Max. output voltage (no-load voltage)	60 V
Dimming range	3 – 100 %
Colour tuning range	2,700 – 6,500 K
Mains surge capability (between L – N)	1 kV
Mains surge capability (between L/N – PE)	2 kV
Surge voltage at output side (against PE)	< 500 V
Lifetime	up to 100,000 h
Dimensions L x W x H	360 x 30 x 21 mm

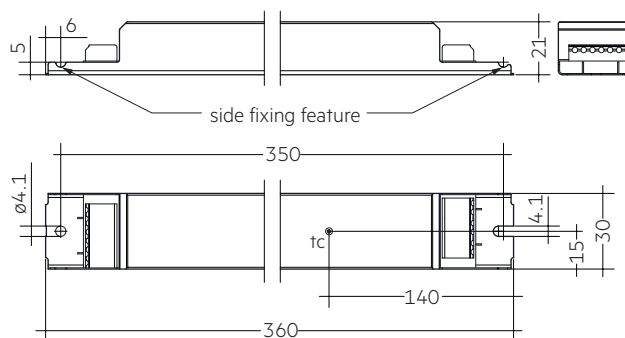


IP20 SELV      RoHS

Driver LCA 100W 350–1050mA 2xDT8 Ip PRE
LLE premium system


Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 264 V
DC voltage range	176 – 288 V
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 48 h
Typ. current (at 230 V, 50 Hz, full load) ^① ^②	185 – 488 mA
Typ. current (220 V, 0 Hz, full load, 15 % dimming level) ^②	87 mA
Leakage current (at 230 V, 50 Hz, full load) ^① ^②	< 500 µA
Typ. efficiency (at 230 V / 50 Hz / full load) ^②	90 %
λ (at 230 V, 50 Hz, full load) ^①	> 0.98
Typ. power input on stand-by ^③	< 0.25 W
Typ. input current in no-load operation	22 mA
Typ. input power in no-load operation	< 0.5 W
In-rush current (peak / duration)	39 A / 286 µs
THD (at 230 V, 50 Hz, full load) ^①	< 6 %
Time to light (at 230 V, 50 Hz, full load) ^①	< 0.6 s
Time to light (DC mode)	< 0.3 s
Switchover time (AC/DC) ^②	< 0.2 s
Turn off time (at 230 V, 50 Hz, full load)	< 20 ms
Output current tolerance ^① ^②	± 3 %
Max. output current peak (non-repetitive)	≤ output current + 20 %
Output LF current ripple (< 120 Hz)	± 4 %
Max. output voltage (no-load voltage)	60 V
Dimming range	3 – 100 %
Colour tuning range	2,700 – 6,500 K
Mains surge capability (between L – N)	1 kV
Mains surge capability (between L/N – PE)	2 kV
Surge voltage at output side (against PE)	< 500 V
Lifetime	up to 100,000 h
Dimensions L x W x H	360 x 40 x 21 mm

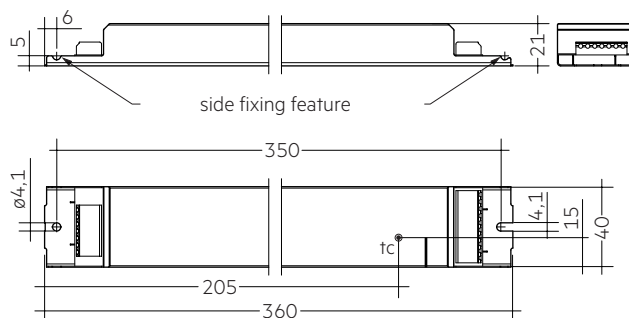

Product description

- LINEAR COVER / ENDCAP for LLE 24
- Protection against direct touch for non-SELV applications (recommendation: use all fixing points)
- Mounting COVER: Fast snap on mounting on to LLE 24 with clips or plastic washers
- Mounting ENDCAP: Fast snap on mounting (sheet thickness 0.5 – 1.0 mm), for drilling hole 4 mm
- High transmission: transparent 94 %, semi-transparent 87 %, diffuse 76 %
- Linear cover made of PMMA
- Endcap made of Polycarbonat
- Tolerances LINEAR COVER: ± 1 mm for 597 mm length (ends finished), + 10 mm for 1,200 / 1,500 / 1,600 / 1,800 mm length (ends raw)

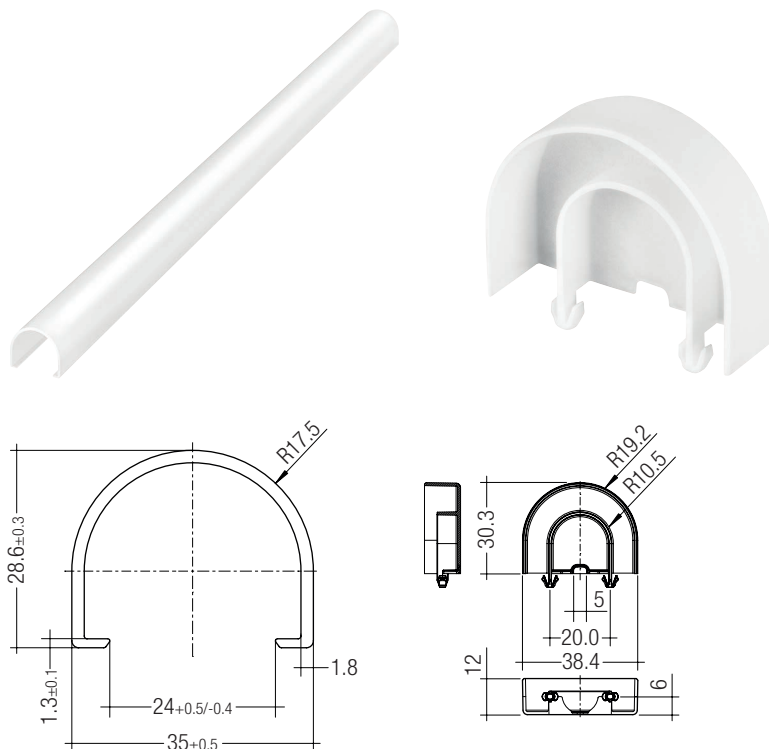

Ordering data

Type	Article number	Colour	Length	Packaging carton	Weight per pc.
LINEAR COVER SY Transparent 1600mm	28000338	Transparent	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Frosted 1800mm	28000437	Semi-transparent	1,800 mm	12 pc(s).	0.308 kg
LINEAR COVER SY Frosted 1600mm	28000339	Semi-transparent	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Frosted 1500mm	28000435	Semi-transparent	1,500 mm	12 pc(s).	0.244 kg
LINEAR COVER SY Frosted 1200mm	28000422	Semi-transparent	1,200 mm	12 pc(s).	0.205 kg
LINEAR COVER SY Frosted 597mm	28000340	Semi-transparent	597 mm	12 pc(s).	0.102 kg
LINEAR COVER SY Diffuse 1800mm	28000438	Diffuse	1,800 mm	12 pc(s).	0.308 kg
LINEAR COVER SY Diffuse 1600mm	28000341	Diffuse	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Diffuse 1500mm	28000436	Diffuse	1,500 mm	12 pc(s).	0.257 kg
LINEAR COVER SY Diffuse 1200mm	28000434	Diffuse	1,200 mm	12 pc(s).	0.205 kg
LINEAR COVER SY Diffuse 597mm	28000342	Diffuse	597 mm	12 pc(s).	0.102 kg

Product description


- ENDCAP for LLE 24
- PUSH-FIX: Fast snap on mounting (sheet thickness 0.5 – 1.0 mm), for drilling hole 4 mm
- SCREW-FIX: Screw mounting with EJOT Delta PT WN 5451 30x8 (not included), tightening torque 0.7 Nm
- Made of Polycarbonat




ACL ENDCAP LLE24 PUSH-FIX



ACL ENDCAP LLE24 SCREW-FIX



ACL ENDCAP LLE24 PUSH-FIX

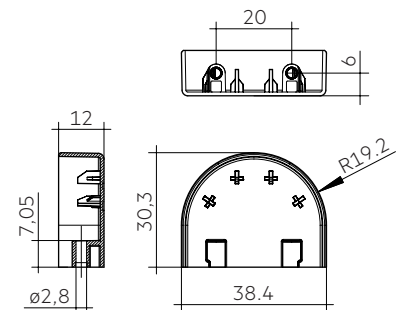

ACL ENDCAP LLE24 SCREW-FIX

Ordering data

Type	Article number	Colour	Packaging carton	Weight per pc.
ACL ENDCAP LLE24 PUSH-FIX	28001037	White	480 pc(s).	0.003 kg
ACL ENDCAP LLE24 SCREW-FIX	28002315	White	480 pc(s).	0.003 kg

Product description LINEAR LENS

- Linear lens for LLE 24
- Available with different beam characteristics
- Protection against direct touch for non-SELV applications
(recommendation: use all fixing points)
- Fast snap on mounting on to LLE 24 with clips or plastic washers
- Linear lense made of PMMA
- Available lengths: 1,200, 1,500, 1,600 and 1,800 mm,
Tolerance: + 10 mm (ends raw)
- Max. permissible temperature 80 °C
- Photometric data available on website

Product description Endcap

- ENDCAP for LINEAR LENS 24mm INTENSE, ASY and DASY
- Mounting by clipping in and screwing from below using screw
EJOT Delta PT WN 5451 20x4, tightening torque 0.7 Nm
- Made of Polyamide UL94 V0



ACL LINEAR LENS 24mm 60°



ACL LINEAR LENS 24mm 90°



ACL LINEAR LENS 24mm INTENSE



ACL LINEAR LENS 24mm BATWING



ACL LINEAR LENS 24mm ASY




ACL LINEAR LENS 24mm DASY




ACL Endcap LENS 24mm PSF


ACL LENS 24mm

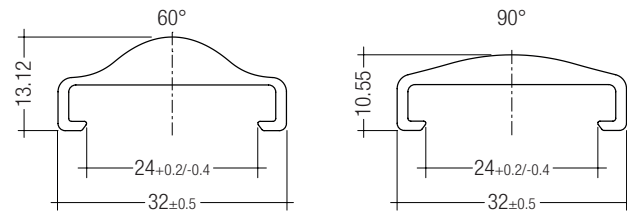


ACL LINEAR LENS 24mm 60° and 90°

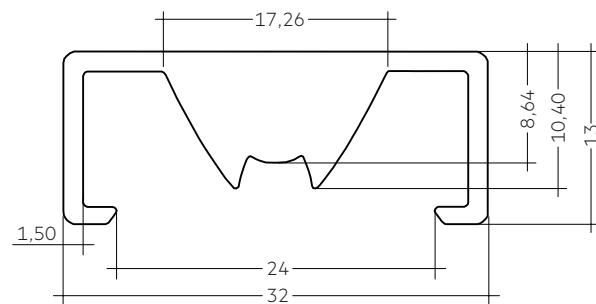


ACL LINEAR LENS 24mm INTENSE

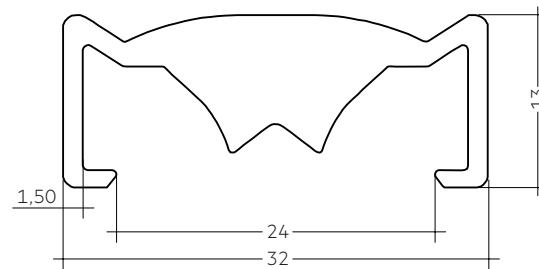

ACL LINEAR LENS 24mm BATWING

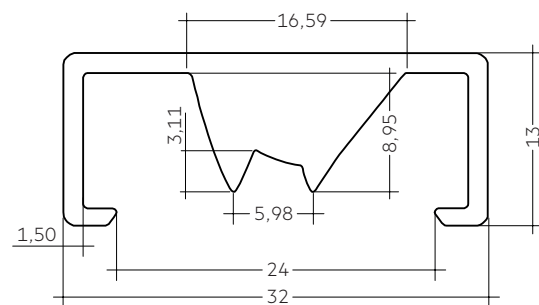


ACL LINEAR LENS 24mm ASY

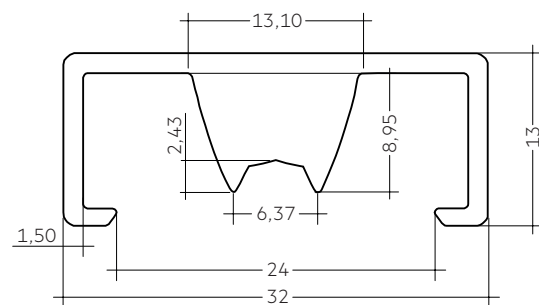

ACL LINEAR LENS 24mm DASY

ACL LENS 24mm

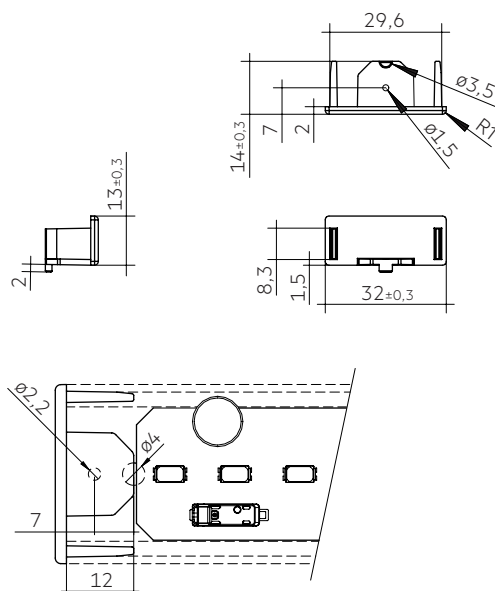

ACL Endcap LENS 24mm PSF

Ordering data


Type	Article number	Beam characteristic	Efficiency	Packaging carton	Weight per pc.
ACL LINEAR LENS 24x1200mm 60°	28001428	60°	97 %	21 pc(s).	0.196 kg
ACL LINEAR LENS 24x1200mm 90°	28001429	90°	97 %	21 pc(s).	0.165 kg
ACL LINEAR LENS 24x1500mm 60°	28000953	60°	97 %	21 pc(s).	0.261 kg
ACL LINEAR LENS 24x1500mm 90°	28000955	90°	97 %	21 pc(s).	0.221 kg
ACL LINEAR LENS 24x1200mm INTENSE	28002024	40°	95 %	18 pc(s).	0.261 kg
ACL LINEAR LENS 24x1500mm INTENSE	28002025	40°	95 %	18 pc(s).	0.326 kg
ACL LINEAR LENS 24x1800mm INTENSE	28002026	40°	95 %	18 pc(s).	0.392 kg
ACL LINEAR LENS 24x1200mm BATWING	28002027	batwing	95 %	18 pc(s).	0.275 kg
ACL LINEAR LENS 24x1500mm BATWING	28002028	batwing	95 %	18 pc(s).	0.344 kg
ACL LINEAR LENS 24x1800mm BATWING	28002029	batwing	95 %	18 pc(s).	0.412 kg
ACL LINEAR LENS 24x1200mm ASY	28002030	asymmetric	95 %	18 pc(s).	0.250 kg
ACL LINEAR LENS 24x1500mm ASY	28002031	asymmetric	95 %	18 pc(s).	0.312 kg
ACL LINEAR LENS 24x1800mm ASY	28002032	asymmetric	95 %	18 pc(s).	0.375 kg
ACL LINEAR LENS 24x1200mm DASY	28002033	double asymmetric	92 %	18 pc(s).	0.249 kg
ACL LINEAR LENS 24x1500mm DASY	28002034	double asymmetric	92 %	18 pc(s).	0.311 kg
ACL LINEAR LENS 24x1800mm DASY	28002035	double asymmetric	92 %	18 pc(s).	0.373 kg
ACL Endcap LENS 24mm PSF	28002669	–	–	3,600 pc(s).	0.003 kg

Product description

- Clip for fixation of LED modules with 4.3 mm holes
- Fast snap on mounting (sheet thickness 0.5 – 1.0 mm for PUSH-FIX and 1 – 2 mm for PUSH-FIX Long)
- For drilling hole 4 mm
- Clip made of Polycarbonat




ACL CLIP 4.3mm PUSH-FIX

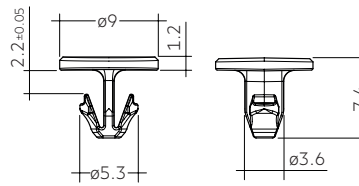

ACL CLIP 4.3mm PUSH-FIX



ACL CLIP 4.3mm PUSH-FIX Long

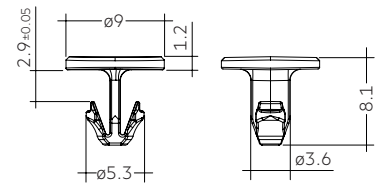

ACL CLIP 4.3mm PUSH-FIX Long

Ordering data

Type	Article number	Colour	Packaging bag ^①	Weight per pc.
ACL CLIP 4.3mm PUSH-FIX	28001036	White	500 pc(s).	0.001 kg
ACL CLIP 4.3mm PUSH-FIX Long	28002314	Transparent	500 pc(s).	0.001 kg

^① Minimum sales quantity 500 pcs.

Module LLE G2 premium

Product description

1. Standards

EN 61000-4-6
EN 61347-1
EN 61547
EN 62031
EN 62471
EN 62778

1.1 Photometric code

Key for photometric code, e. g. 930 / 349

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code	CRI	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the lifetime (max.6000h)
7	70 – 79			Luminous flux after 25% of the lifetime (max.6000h)
8	80 – 89			Code
9	≥90			Luminous flux
				7 ≥ 70 %
				8 ≥ 80 %
				9 ≥ 90 %

2. Thermal details

2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For LLE a tp temperature of 65 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-30 ... +80 °C
---------------------	----------------

Operation only in non condensing environment.
Humidity during processing of the module should be between 30 to 70 %.

2.3 Thermal design and heat sink

The rated life of LED products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the LLE will be greatly reduced or the LLE may be destroyed.

Therefore the LLE needs to be mounted onto a heat sink.

Tridonic's excellent thermal design for the LED products provides the lowest thermal resistance and therefore allowing new compact designs without sacrificing quality, safety and lifetime.

2.4 Heat sink values

TW LLE G2 24x280MM 700LM 927-965 PRE

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	65 °C	125 mA	11.8 K/W	57 cm ²
35 °C	65 °C	125 mA	8.8 K/W	75 cm ²
45 °C	65 °C	125 mA	5.9 K/W	113 cm ²
55 °C	65 °C	125 mA	2.9 K/W	226 cm ²

TW LLE G2 24x280MM 1500LM 927-965 PRE

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	65 °C	275 mA	5.2 K/W	128 cm ²
35 °C	65 °C	275 mA	3.9 K/W	171 cm ²
45 °C	65 °C	275 mA	2.6 K/W	256 cm ²
55 °C	65 °C	275 mA	1.3 K/W	514 cm ²

Notes

These values apply to a single LED module.

The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. The LED modules must rest flat on the heat sink.

3. Installation / wiring

3.1 Electrical supply/choice of LED driver

LLE modules must be operated with SELV LED drivers.




LLE modules are basic insulated up to 60 V SELV against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED driver (also against earth) is above 60 V SELV, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction.


At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

3.2 Wiring


Wiring diagram for switchDIM and colourSWITCH for LLE premium (700lm: 3 to 6 modules, 1500lm: 2 to 5 modules)

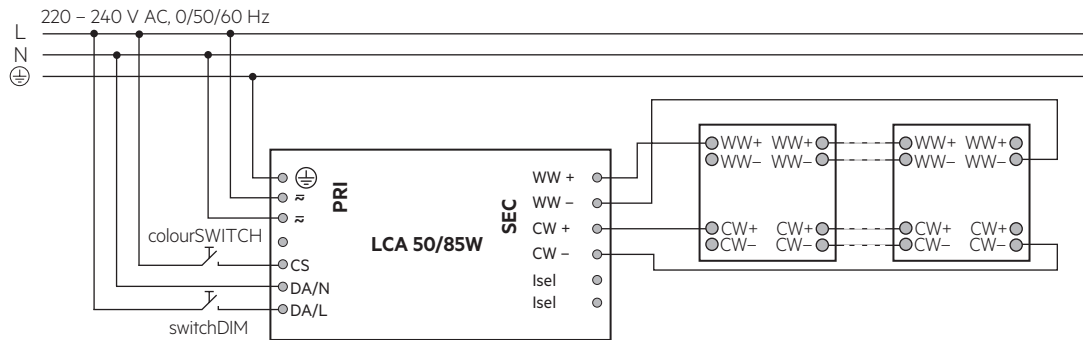


Wiring diagram for DALI for LLE premium (700lm: 3 to 6 modules, 1500lm: 2 to 5 modules)

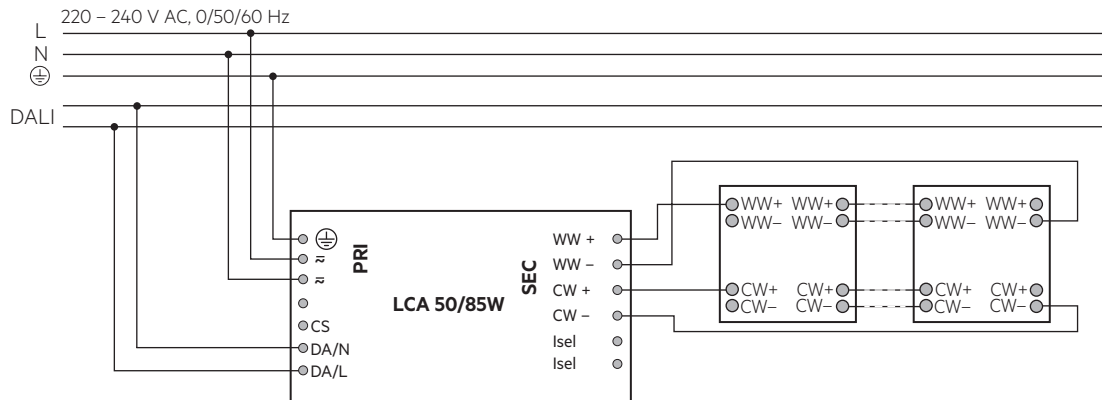

Wiring diagram for switchDIM and colourSWITCH for LLE premium (1500lm: 6 modules)

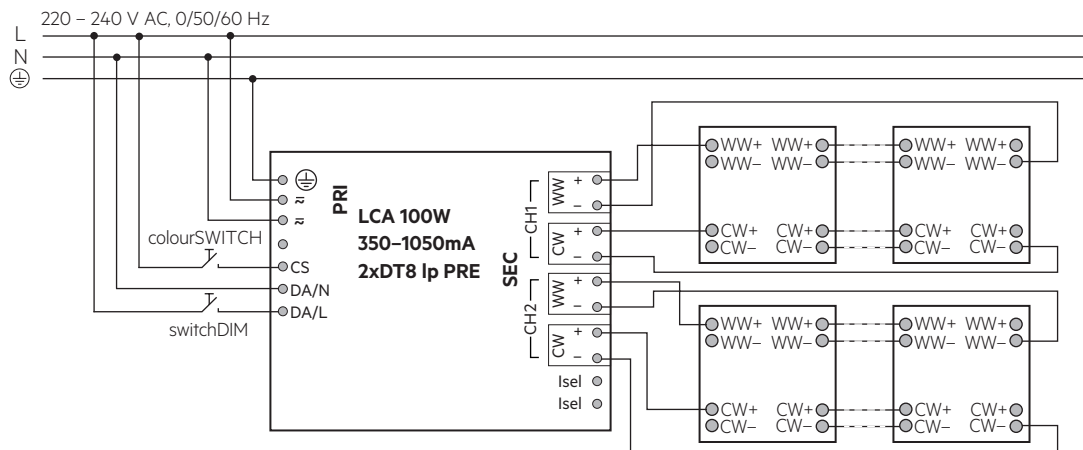

Wiring diagram for DALI for LLE premium (1500lm: 6 modules)

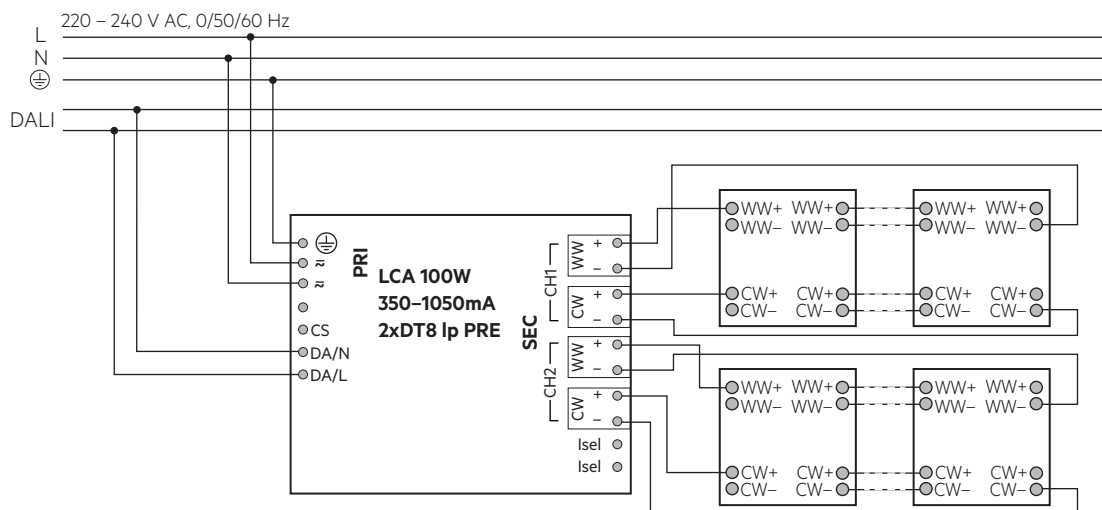


Mixing of components from different sets is not allowed due to the pre-calibration of the system. With the LCA 100W 350 – 1050mA 2xDT8 Ip PRE connect the module according to the label information of the LED driver.

Type: LLE G2 24X280MM 6X1500LM 927-965 LV PRE
Art. No.: 89609999 **CCT:** 2700 - 6500K
System Batch: 875682 **Module Batch:** 655728
Channel 1: Use only with matching LED!
Module Nr.: 101.20/120.20/103.20/106.31/105.31/555.40/
 558.40/555.38/556.11/556.14
Channel 2:
Module Nr.: 105.23/122.22/105.10/104.21/108.21/556.41/
 548.30/455.38/546.11/546.18




The LED modules must be connected from both sides as shown in the wiring diagram.

Wiring diagram for emergency

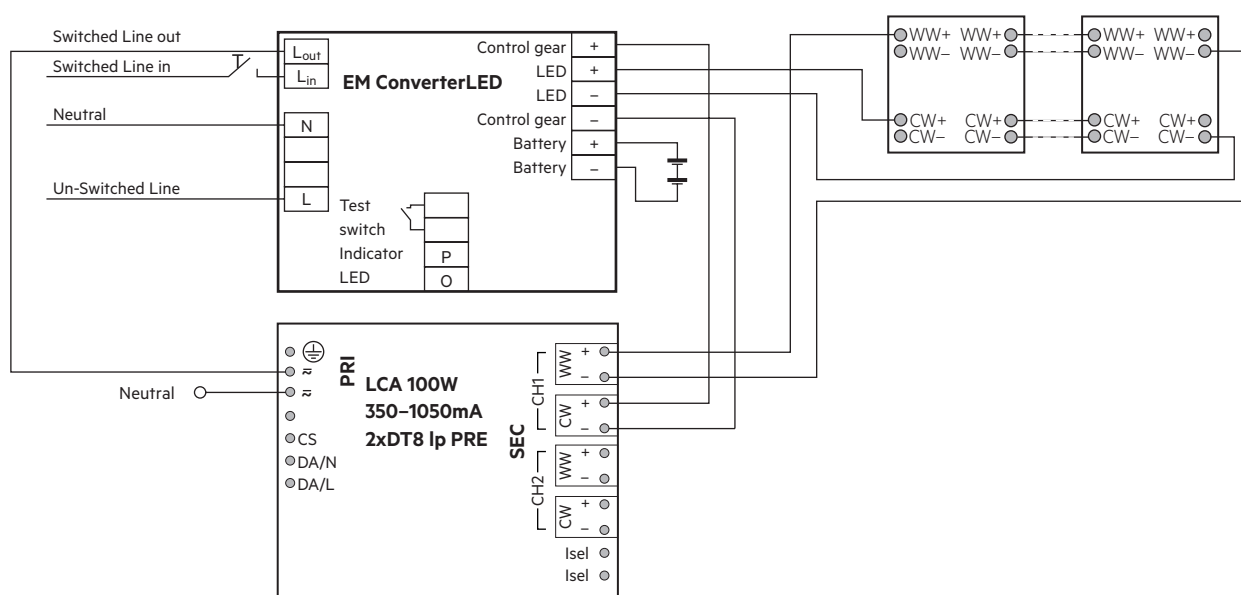

3.3 Wiring type and cross section

For wiring use stranded wire with ferrules or solid wire from 0.2 to 0.75 mm².
For the push-wire connection you have to strip the insulation (6–9 mm).



To remove the wires use a suitable tool (e.g. Microcon release pin) or from twist and pull.

3.4 Mounting instruction



None of the components of the LLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted onto a heat sink with min. 3 screws per module or ACL CLIP 4.3mm.



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.

3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

4. Lifetime

4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.

L70 means that the LED module will have 70 % of its initial luminous flux after the stated operating time. This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value. In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

4.2 Lumen maintenance for LLE premium

Lifetime declarations are informative and represent no warranty claim.

LLE G2 24x280MM 700LM PRE

Forward current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
125 mA	55 °C	30,000 h	>50,000 h	>50,000 h	>50,000 h	>50,000 h	>50,000 h
	60 °C	22,000 h	>50,000 h	41,000 h	>50,000 h	>50,000 h	>50,000 h
	65 °C	16,000 h	37,000 h	31,000 h	>50,000 h	46,000 h	>50,000 h
	70 °C	12,000 h	27,000 h	23,000 h	>50,000 h	35,000 h	>50,000 h

LLE G2 24x280MM 1500LM PRE

Forward current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
330 mA	55 °C	30,000 h	>50,000 h	>50,000 h	>50,000 h	>50,000 h	>50,000 h
	60 °C	22,000 h	>50,000 h	41,000 h	>50,000 h	>50,000 h	>50,000 h
	65 °C	16,000 h	37,000 h	31,000 h	>50,000 h	46,000 h	>50,000 h
	70 °C	12,000 h	27,000 h	23,000 h	>50,000 h	35,000 h	>50,000 h

Lumen maintenance values are based on LM80 data.

Values may be updated when more recent results are available.

5. Photometric characteristics

5.1 Coordinates and tolerances according to CIE 1931

The specified colour coordinates are integral measured by a current impulse of 100 ms.

The ambient temperature of the measurement is $t_a = 25^\circ\text{C}$.


The measurement tolerance of the colour coordinates are ± 0.01 .

Module type	Current impulse
LLE G2 24x280MM 700LM PRE	65 mA
LLE G2 24x280MM 1500LM PRE	130 mA

2,700 K

	x0	y0
Centre	0.4578	0.4101


MacAdam ellipse: 3SDCM

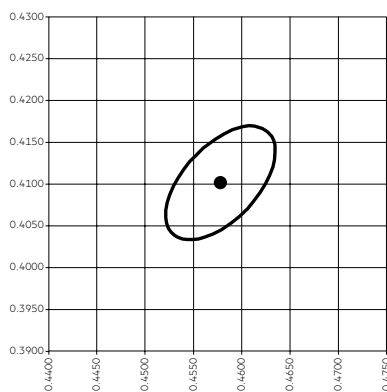


6,500 K

	x0	y0
Centre	0.3123	0.3281

MacAdam ellipse: 3SDCM

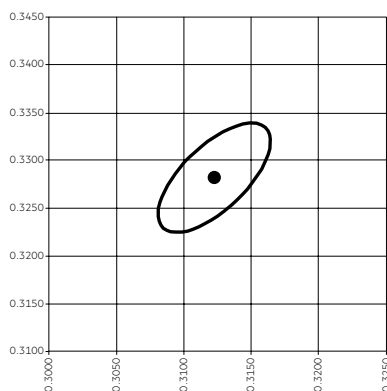

Colour spectrum at different colour temperatures

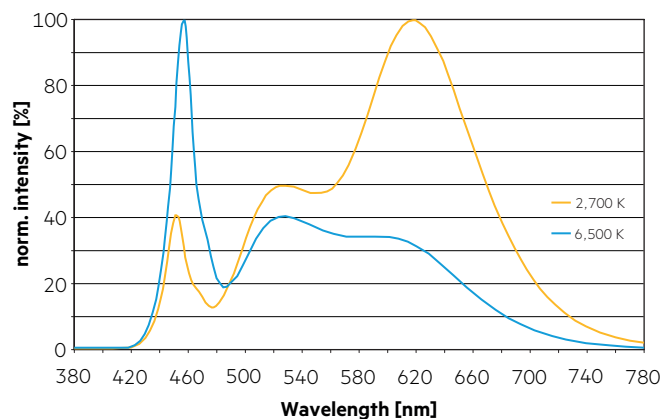


5.2 Light distribution

The optical design of the LLE product line ensures optimum homogeneity for the light distribution.




The colour temperature is measured integral over the complete module.

To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 6 cm) should be used.

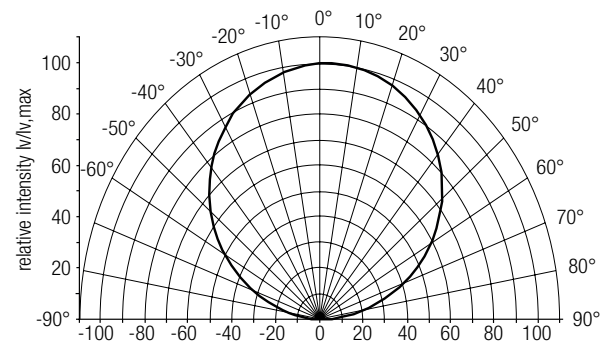

The diagrams are based on statistic values.

5.3 Relative luminous flux vs. operating temperature

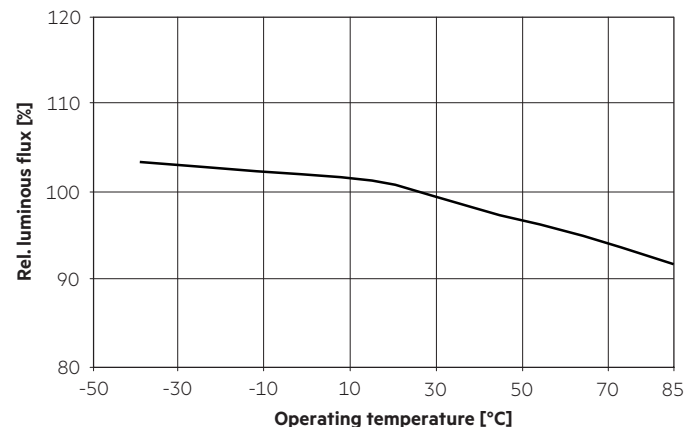

6. Miscellaneous

6.1 Additional information

Additional technical information Design-in Guide, 3D data, photometric data and Guarantee conditions at www.tridonic.com

7. Photometric characteristics system

7.1 Coordinates and tolerances according to CIE 1931


The specified colour coordinates are integral measured by a current impulse of 100 ms.

The ambient temperature of the measurement is $t_a = 25^\circ\text{C}$.


The measurement tolerance of the colour coordinates are ± 0.01 .

Module type	Current impulse
LLE G2 24x280MM 700LM PRE	65 mA
LLE G2 24x280MM 1500LM PRE	130 mA

	2,700 K		3,000 K		3,500 K		4,000 K		4,500 K		5,000 K		5,500 K		6,000 K		6,500 K	
	x0	y0	x0	y0	x0	y0	x0	y0	x0	y0	x0	y0	x0	y0	x0	y0	x0	y0
Centre	0.4578	0.4101	0.4335	0.3964	0.4013	0.3783	0.3778	0.3651	0.3596	0.3548	0.3448	0.3465	0.3324	0.3395	0.3220	0.3336	0.3123	0.3282
MacAdam ellipse 100 – 50 % dimming level	3 SDCM																	
MacAdam ellipse 50 – 10 % dimming level	4 SDCM																	
MacAdam ellipse 10 – 3 % dimming level	6 SDCM																	

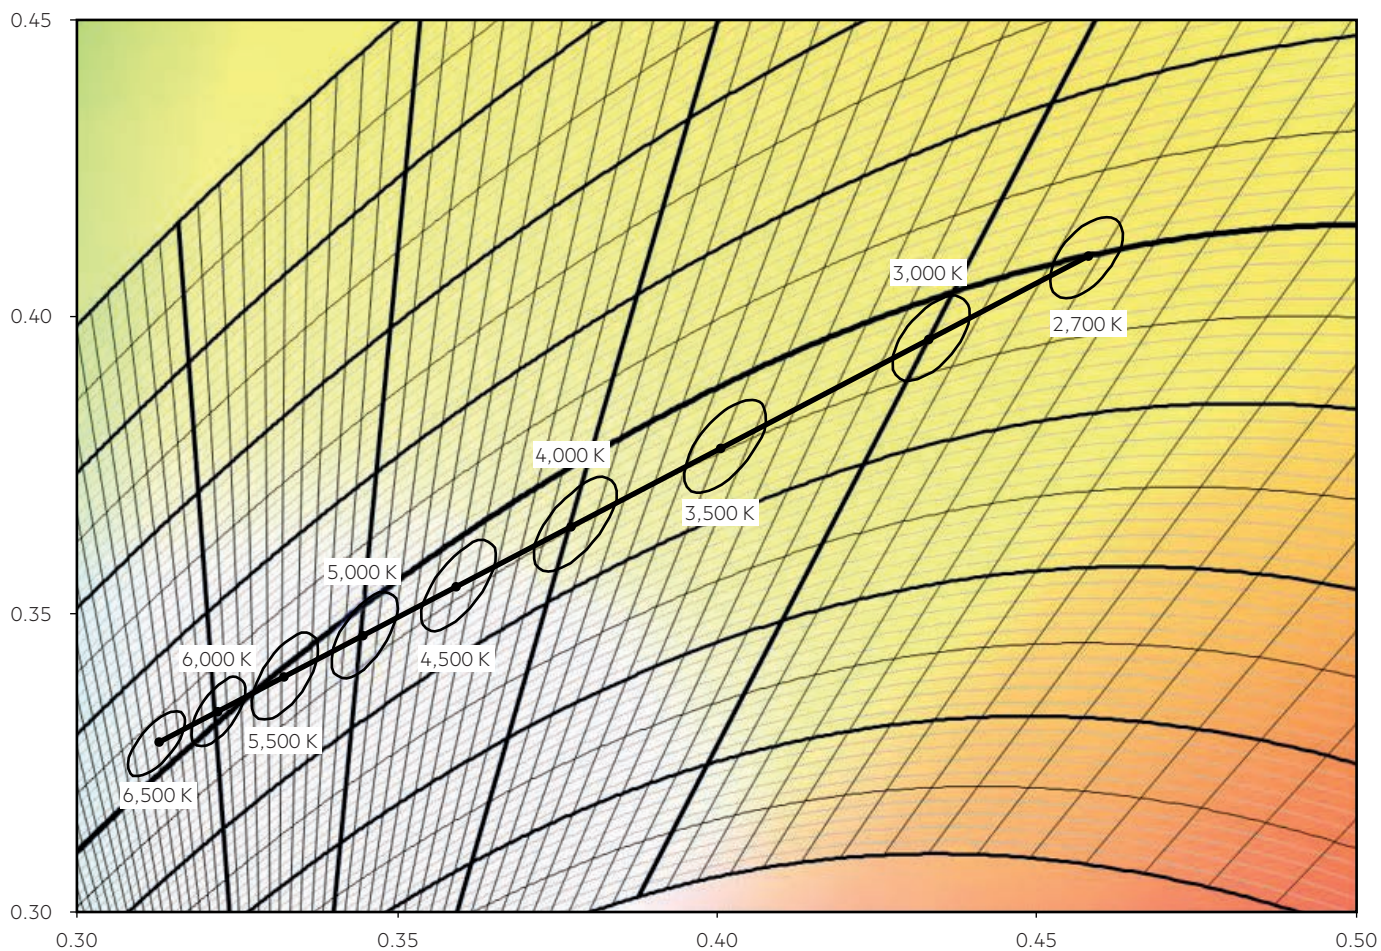

7.2 Colour spectrum at different colour temperatures

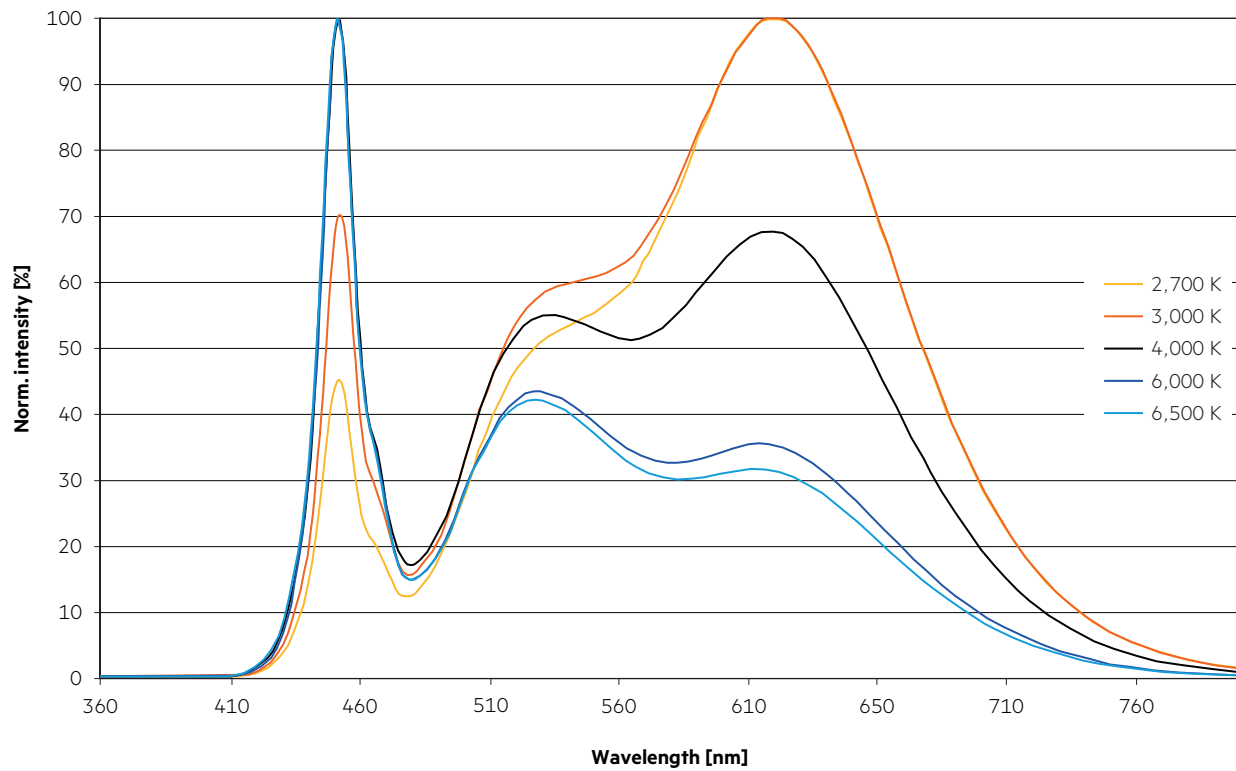

Driver LCA 50W, 85W and 100W DT8 Ip PRE

Product description

1. Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 62384
EN 61547
EN 62386-101 (according to DALI standard V2)
EN 62386-102
EN 62386-207
According to EN 50172 for use in central battery systems
According to EN 60598-2-22 suitable for emergency lighting installations

2. Thermal details and lifetime

2.1 Expected lifetime

Type	Output current	ta	30 °C	40 °C	45 °C	50 °C	55 °C
LCA 50W 350-1050mA DT8 Ip PRE	350 – 700 mA	tc	50 °C	60 °C	65 °C	70 °C	75 °C
		Lifetime	> 100,000 h	> 100,000 h	100,000 h	75,000 h	50,000 h
	700 – 1,050 mA	tc	55 °C	65 °C	70 °C	75 °C	80 °C
		Lifetime	> 100,000 h	> 100,000 h	75,000 h	50,000 h	40,000 h

Type	Output current	ta	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C
LCA 85W 600-1800mA DT8 Ip PRE	600 – 1,000 mA	tc	50 °C	55 °C	60 °C	65 °C	70 °C	75 °C
		Lifetime	> 100,000 h	> 100,000 h	> 100,000 h	100,000 h	90,000 h	60,000 h
	>1,000 – 1,400 mA	tc	55 °C	60 °C	65 °C	70 °C	75 °C	80 °C
		Lifetime	> 100,000 h	> 100,000 h	> 100,000 h	80,000 h	60,000 h	40,000 h
	>1,400 – 1,800 mA	tc	60 °C	65 °C	70 °C	83 °C	–	–
		Lifetime	> 100,000 h	> 100,000 h	80,000 h	50,000 h	–	–

Type	Output current (CH1 = CH2 = 4,000 K)	ta	30 °C	35 °C	40 °C	50 °C	55 °C
LCA 100W 350-1050mA 2xDT8 Ip PRE	350 – 700 mA	tc	50 °C	55 °C	65 °C	75 °C	80 °C
		Lifetime	> 100,000 h	> 100,000 h	100,000 h	75,000 h	50,000 h
	700 – 900 mA	tc	55 °C	60 °C	70 °C	80 °C	85 °C
		Lifetime	> 100,000 h	> 100,000 h	75,000 h	50,000 h	30,000 h
	900 – 1,050 mA	tc	60 °C	65 °C	70 °C	80 °C	–
		Lifetime	> 100,000 h	90,000 h	65,000 h	40,000 h	–

The LED driver is designed for a lifetime stated above under reference conditions and with a failure probability of less than 10 %.

The relation of tc to ta temperature depends also on the luminaire design.

If the measured tc temperature is approx. 5 K below tc max., ta temperature should be checked and eventually critical components (e.g. ELCAP) measured. Detailed information on request.


3. Installation / wiring

3.1 Wiring type and cross section


For wiring use solid wire from 0.5 – 1.5 mm².

Strip 8 – 9 mm of insulation from the cables to ensure perfect operation of terminals.

LED module/LED driver/supply



3.2 Loose wiring



Loosen wire through twisting
and pulling or using a Ø 1 mm
release tool

3.3 Wiring guidelines

- The cables should be run separately from the mains connections and mains cables to ensure good EMC conditions.
- The LED wiring should be kept as short as possible to ensure good EMC. The max. secondary cable length is 2 m (4 m circuit), this applies for LED output and not for I-SELECT 2.
- Secondary switching is not permitted.
- The LED driver has no inverse-polarity protection on the secondary side. Wrong polarity can damage LED modules with no inverse-polarity protection.
- Wrong wiring of the LED driver can lead to malfunction or irreparable damage.
- In case of protection class II applications it's recommended to separate the lamp wires of the different channels. Depending onto the luminaire construction additional actions, such as equipotential connection between driver and LED or a toroidal ferrite at the lamp wires are recommended.

3.4 Hot plug-in

Hot plug-in is not supported due to residual output voltage of > 0 V.

If a LED load is connected the device has to be restarted before the output will be activated again.

This can be done via mains reset or via interface (DALI, DSI, switchDIM).

3.5 Earth connection

The earth connection is conducted as protection earth (PE). The LED driver can be earthed via earth terminal or metal housing. If the LED driver will be earthed, protection earth (PE) has to be used. There is no earth connection required for the functionality of the LED driver.

Earth connection is recommended to improve following behaviour:


- Electromagnetic interferences (EMI)
- LED glowing at stand-by
- Transmission of mains transients to the LED output

In general it is recommended to earth the LED driver if the LED module is mounted on earthed luminaire parts respectively heat sinks and thereby representing a high capacity against earth.


4. Electrical values

4.1 Operating window


LCA 50W 350-1050mA DT8 Ip PRE

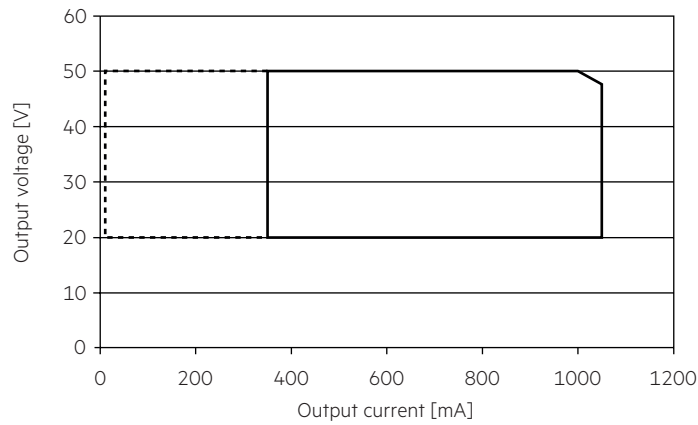


LCA 50W 350-1050mA DT8 Ip PRE

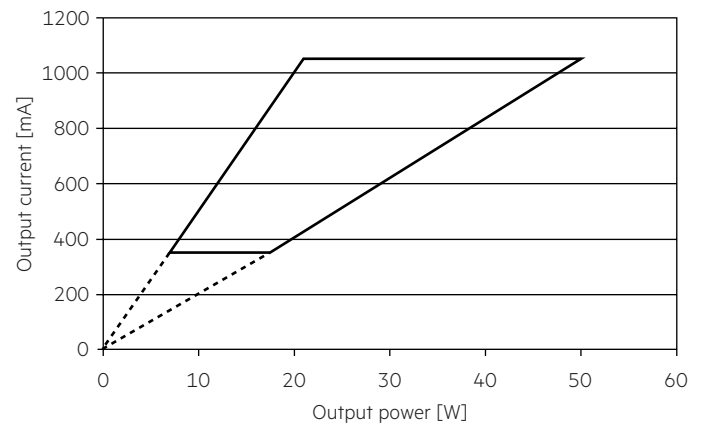


LCA 85W 600-1800mA DT8 Ip PRE

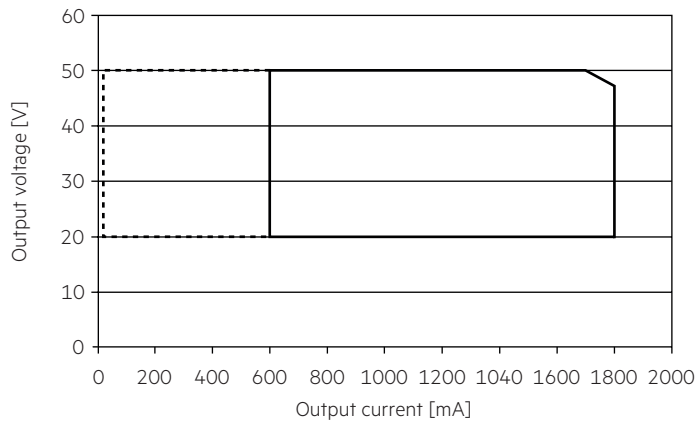


LCA 85W 600-1800mA DT8 Ip PRE

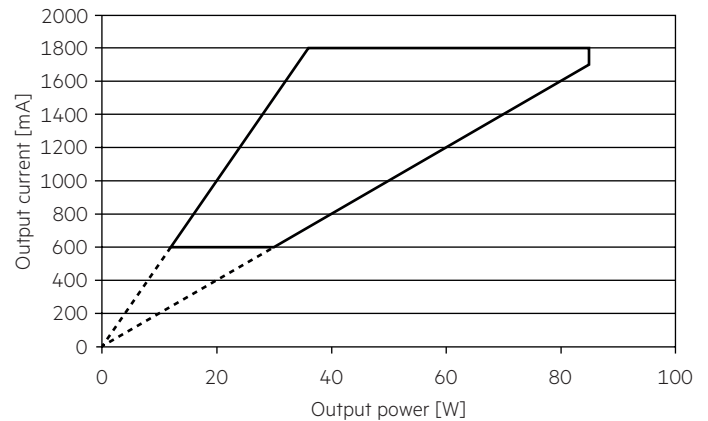

LCA 100W 350-1050mA 2xDT8 Ip PRE

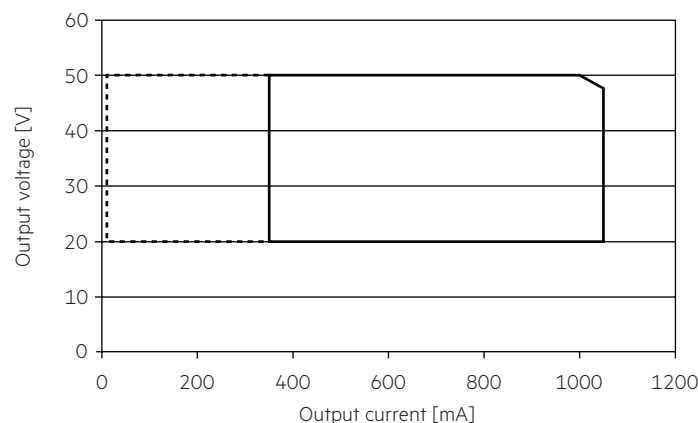

LCA 100W 350-1050mA 2xDT8 Ip PRE

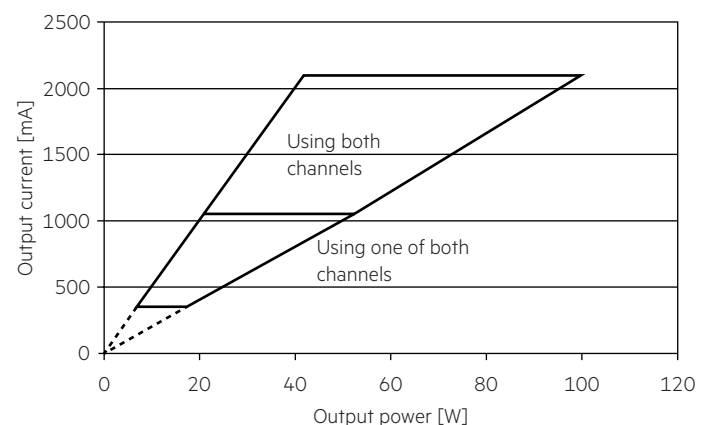


— Operating window 100 %
- - - - - Operating window dimmed


Make sure that the LED driver is operated within the given window under all operating conditions. Special attention needs to be paid at dimming and DC emergency operation as the forward voltage of the connected LED modules varies with the dimming level, due to the implemented amplitude dimming technology. Coming below the specified minimum output voltage of the LED driver may cause the device to shut-down. See chapter "6.9 Light level in DC operation" for more information.

4.2 LCA 50W 350-1050mA DT8 Ip PRE


Efficiency vs load

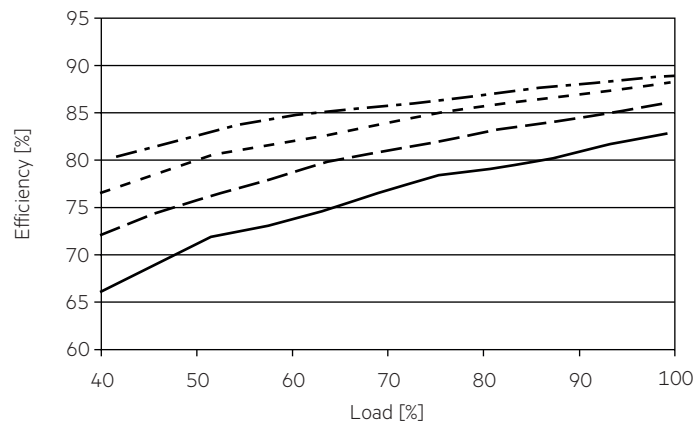

Power factor vs load

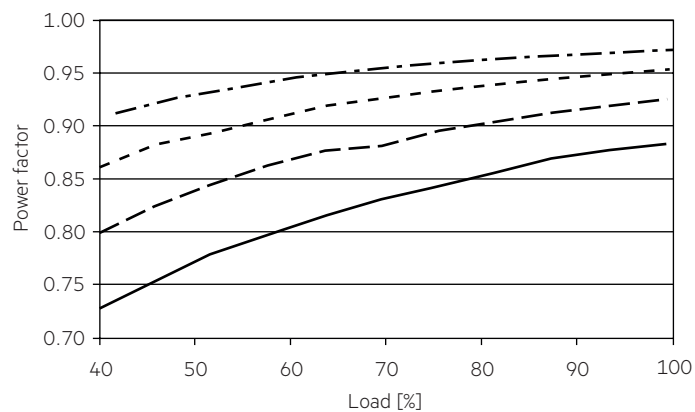

THD vs load

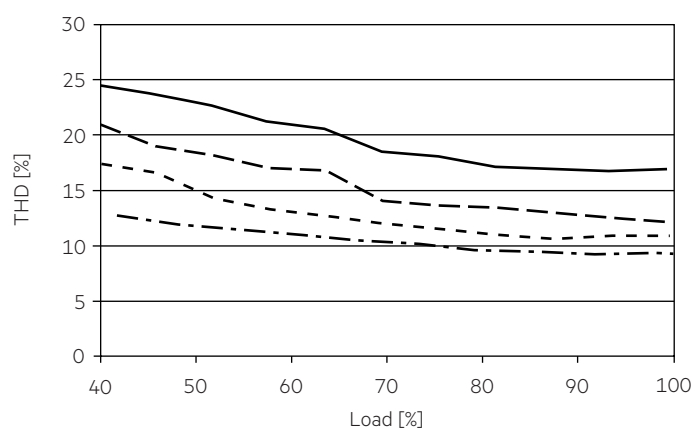


— 350 mA
- - 500 mA
... 700 mA
- . 1050 mA


100 % load corresponds to the max. output power (full load) according to the table on page 4.

4.3 LCA 85W 600-1800mA DT8 Ip PRE


Efficiency vs load

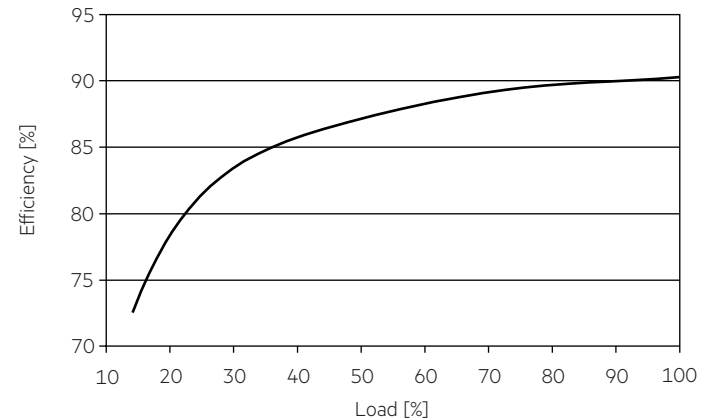

Power factor vs load

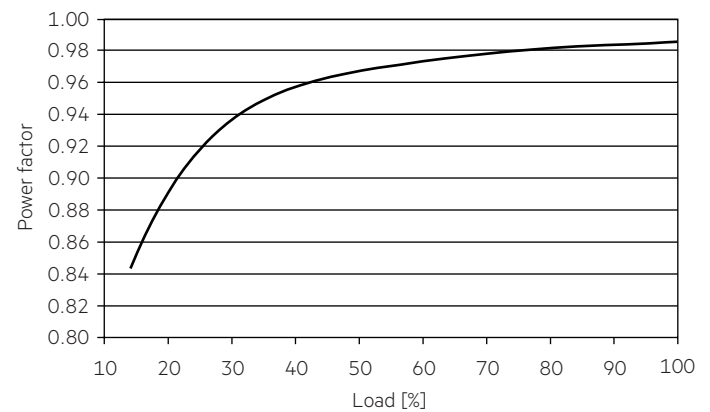


THD vs load

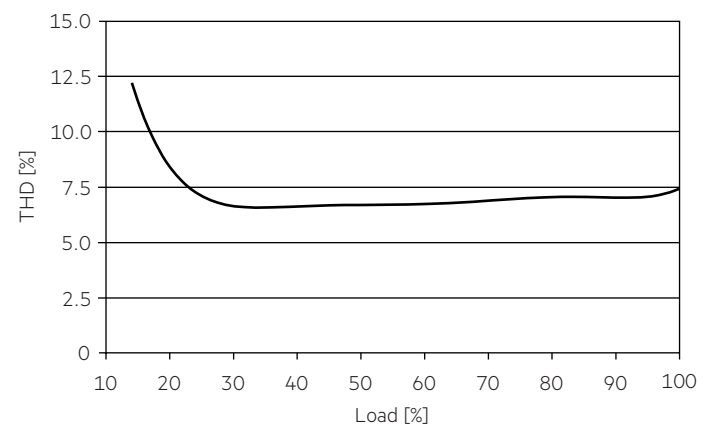


100 % load corresponds to the max. output power (full load) according to the table on page 6.

4.4 LCA 100W 350-1050mA 2xDT8 Ip PRE



Efficiency vs load

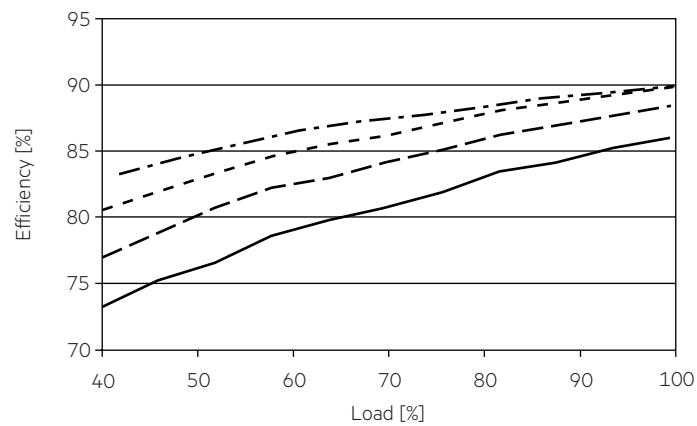

Power factor vs load

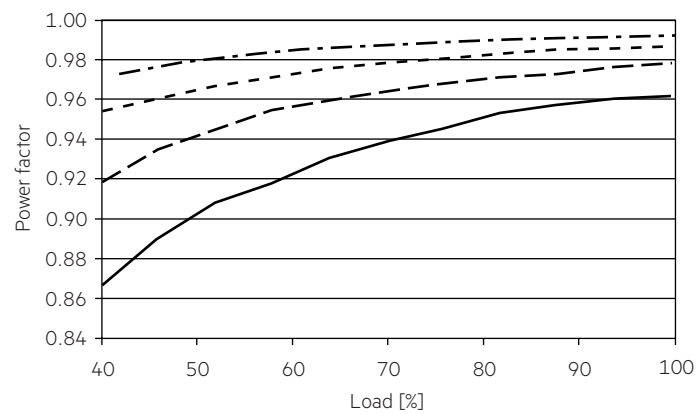

THD vs load

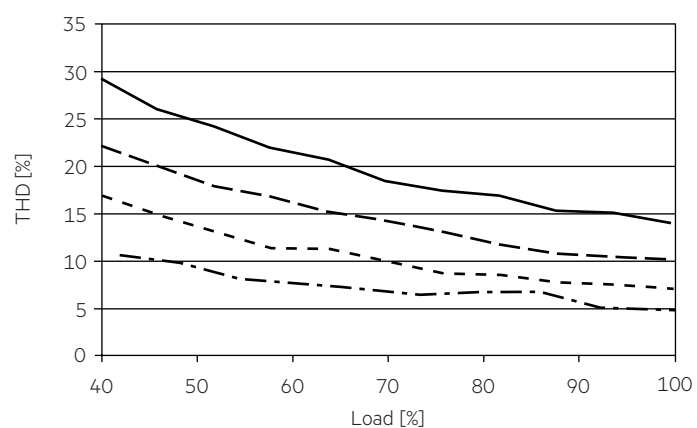

100 % load corresponds to the max. output power (full load) according to the table on page 7.

4.5 Maximum loading of automatic circuit breakers

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm ²	1.5 mm ²	2.5 mm ²	4 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	4 mm ²	I _{max}	time
LCA 50W 350-1050mA DT8 Ip PRE	21	28	36	45	13	17	22	27	29 A	180 µs

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm ²	1.5 mm ²	2.5 mm ²	4 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	4 mm ²	I _{max}	time
LCA 85W 600-1800mA DT8 Ip PRE	15	20	25	32	9	12	15	19	31.5 A	215 µs

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm ²	1.5 mm ²	2.5 mm ²	4 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	4 mm ²	I _{max}	time
LCA 100W 350-1050mA 2xDT8 Ip PRE	10	13	16	21	6	8	10	13	39 A	286 µs

Calculation uses typical values from ABB series S200 as a reference.
Actual values may differ due to used circuit breaker types and installation environment.

4.6 Harmonic distortion in the mains supply (at 230 V / 50 Hz and full load) in %

	THD	3.	5.	7.	9.	11.
LCA 50W 350-1050mA DT8 Ip PRE	< 10	< 9	< 3	< 3	< 2	< 1

	THD	3.	5.	7.	9.	11.
LCA 85W 600-1800mA DT8 Ip PRE	< 10	< 10	< 3	< 2	< 2	< 2

	THD	3.	5.	7.	9.	11.
LCA 100W 350-1050mA 2xDT8 Ip PRE	< 6	< 5	< 1	< 1	< 1	< 1

4.7 Dimming

Dimming range 3 % to 100 %


Digital control with:

- DSI signal: 8 bit Manchester Code
Speed 3 % to 100 % in 1.4 s
- DALI signal: 16 bit Manchester Code
Speed 3 % to 100 % in 0.2 s
Programmable parameter:
Minimum dimming level
Maximum dimming level
Default minimum = 3 %
Programmable range $3\% \leq \text{MIN} \leq 100\%$
Default maximum = 100 %
Programmable range $100\% \geq \text{MAX} \geq 3\%$

Dimming curve is adapted to the eye sensitiveness.
Dimming is realized by amplitude dimming.

4.8 Dimming characteristics

Digital dimming value

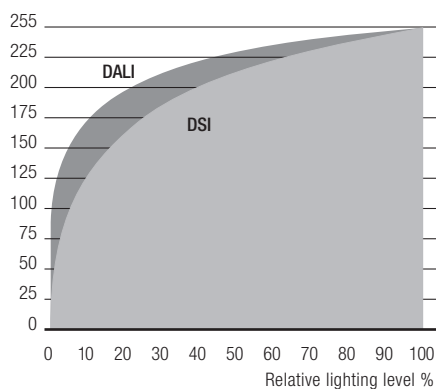

Dimming characteristics as seen by the human eye

5. Interfaces / communication

5.1 Control input (DA/N, DA/L)

Digital DALI signal or switchDIM can be wired on the same terminals (DA/N and DA/L).

The control input is non-polar for digital control signals (DALI, DSI). The control signal is not SELV. Control cable has to be installed in accordance to the requirements of low voltage installations.
Different functions depending on each module.

5.2 switchDIM

Integrated switchDIM function allows a direct connection of a pushbutton for dimming and switching.

Brief push (< 0.6 s) switches LED driver ON and OFF. The dim level is saved at power-down and restored at power-up.

When the pushbutton is held, LED modules are dimmed. After releasing and pushing the LED modules are dimmed in the opposite direction.

In installations with LED drivers with different dimming levels or opposite dimming directions (e.g. after a system extension), all LED drivers can be synchronized to 50 % dimming level by a 10 s push.

Use of pushbutton with indicator lamp is not permitted.

5.3 colourSWITCH


A conventional pushbutton can be used to control the system via colourSWITCH.

Use of pushbutton with indicator lamp is not permitted.

For control via a pushbutton different settings can be made:

- Short press: Setting the colour temperature via colourSWITCH mode with 9 values between 2,700 and 6,500 K.
- Long press (> 1 s): Stepless setting of colour temperature. After completion the colour temperature direction will be inverted.
- These values can be changed via masterCONFIGURATOR.
- Alternatively the colour temperature could be changed via DALI device type 8 control system.

In installations with LED drivers with different colour temperature or opposite colour temperature directions (e.g. after a system extension), all LED drivers can be synchronized to 4,500 K by a 10 s push.

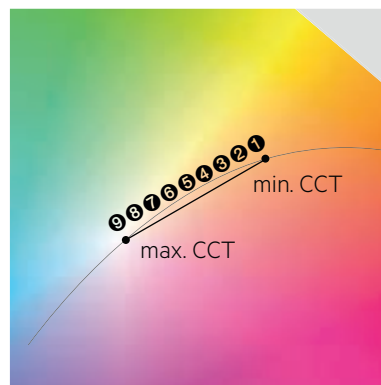

6. Functions

6.1 Short-circuit behaviour

In case of a short-circuit at the LED output the LED output is switched off. After restart of the LED driver the output will be activated again. The restart can either be done via mains reset or via interface (DALI, DSI, switchDIM).

6.2 No-load operation

The LED driver will not be damaged in no-load operation. The output will be deactivated and is therefore free of voltage. If a LED load is connected the device has to be restarted before the output will be activated again.

6.3 Overload protection

If the output voltage range is exceeded the LED driver turns off the LED output. After restart of the LED driver the output will be activated again. The restart can either be done via mains reset or via interface (DALI, DSI, switchDIM).

6.4 Overtemperature protection

The LED driver is protected against temporary thermal overheating. If the temperature limit is exceeded the output current of the LED module(s) is reduced. The temperature protection is activated approx. +5 °C above $t_{c \max}$ (see page 2). On DC operation this function is deactivated to fulfill emergency requirements.

6.5 corridorFUNCTION

The corridorFUNCTION can be programmed in two different ways. To program the corridorFUNCTION by means of software a DALI-USB interface is needed in combination with a DALI PS. The software can be the masterCONFIGURATOR.

To activate the corridorFUNCTION without using software a voltage of 230 V has to be applied for five minutes at the switchDIM connection. The unit will then switch automatically to the corridorFUNCTION.

Note:

If the corridorFUNCTION is wrongly activated in a switchDIM system (for example a switch is used instead of pushbutton), there is the option of installing a pushbutton and deactivating the corridorFUNCTION mode by five short pushes of the button within three seconds.

switchDIM and corridorFUNCTION are very simple tools for controlling gears with conventional pushbuttons or motion sensors.

To ensure correct operation a sinusoidal mains voltage with a frequency of 50 Hz or 60 Hz is required at the control input.

Special attention must be paid to achieving clear zero crossings. Serious mains faults may impair the operation of switchDIM and corridorFUNCTION.

6.6 Constant light output (CLO)

The luminous flux of a LED decreases constantly over the lifetime. The CLO function ensures that the emitted luminous flux remains stable. For that purpose the LED current will increase continuously over the LED lifetime. In masterCONFIGURATOR it is possible to select a start value (in percent) and an expected lifetime. The LED driver adjusts the current afterwards automatically.

6.7 Power-up/-down fading

The power-up/-down function offers the opportunity to modify the on-/off behaviour. The time for fading on or off can be adjusted in a range of 0.2 to 16 seconds. According to this value, the device dims either from 0 % up to the power-on level or from the current set dim level down to 0 %.

This feature applies while operating via switchDIM and when switching the mains voltage on or off.

By factory default no fading time is set (= 0 seconds).

6.8 Light level in DC operation

The LED driver is designed to operate on DC voltage and pulsed DC voltage. For a reliable operation, make sure that also in DC emergency operation the LED driver is run within the specified conditions as stated in chapter "4.1 operating window".

Light output level in DC operation: programmable 3 – 100 % (EOFi = 0.13). Programming by DALI.

In DC operation dimming mode can be activated.

The voltage-dependent input current of Driver incl. LED module is depending on the used load.

The voltage-dependent no-load current of Driver (without or defect LED module) is for:

AC: 21.8 mA (at 230 V, 50 Hz)

DC: 5 – 7 mA (at 275 – 186 V, 0 Hz)

6.9 Software / programming

With appropriate software and an interface different functions can be activated and various parameters can be configured in the LED driver. To do so, a DALI-USB and the software (masterCONFIGURATOR) are required.

6.10 masterCONFIGURATOR

From version 2.8:

For programming functions (CLO, I-SELECT 2, power-up fading, corridorFUNCTION, colourSWITCH) and device settings (fade time, ePowerOnLevel, DC level, etc.).

For further information see masterCONFIGURATOR manual.

6.11 deviceCONFIGURATOR

PC (windows) based software application to transfer parameters into our drivers.

Workflow optimised for the use in OEM production line.

For further information see deviceCONFIGURATOR manual.

7. Miscellaneous

7.1 Insulation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an insulation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.

The insulation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V_{AC} (or 1.414 x 1500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

7.2 Conditions of use and storage

Environmental conditions: 5 % up to max. 85 %, not condensed (max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be acclimatised to the specified temperature range (ta) before they can be operated.

7.3 Additional information

Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services

Lifetime declarations are informative and represent no warranty claim. No warranty if device was opened.