



Module LLE 24mm 1250lm HV ADV6

Modules LLE advanced

Product description

- Ideal for linear and panel lights
- 2 terminals for serial wiring
- Perfectly uniform light, even if several LED modules are used together in a line
- Push terminals for quick and simple wiring of LED module to LED module
- Option backside terminal
- Broad portfolio from extruded lenses and covers available
- HE ... High Efficiency, NM ... Nominal Mode, HO ... High Output
- Min. order quantity LLE 24x70mm QTY4: 36 pcs. The LLE 24x70mm QTY4 module contains 4 single 24x70mm modules which have to be separated
- Long lifetime: 72,000 hours
- 5 years guarantee (conditions at www.tridonic.com)

Optical properties

- Colour temperatures 2,700 K, 3,000 K, 3,500 K, 4,000 K, 5,000 K and 6,500 K
- Useful luminous flux 2,482 lm at Irated and tp = 25 °C
- Efficacy of the LED module 205 lm/W at Irated and tp = 25 °C
- High colour rendering index CRI > 80
- High colour consistency (MacAdam 3)[®]
- Small luminous flux tolerances

Mechanical properties

- Module dimension 24 x 70 mm, 24 x 140 mm, 24 x 280 mm and 24 x 560 mm (ZHAGA compliant)
- Simple installation (e.g. clips or screws)

System solution

- Combine Tridonic`s LED modules and dimmable drivers to achieve an outstanding system efficacy (configuration possible via <https://setbuilder.tridonic.com/>)



Standards, page 15

Colour temperatures and tolerances, page 21



LLE 24x70mm 325lm HV ADV6




LLE 24x140mm 650lm HV ADV6



LLE 24x280mm 1250lm HV ADV6



LLE 24x560mm 2400lm HV ADV6

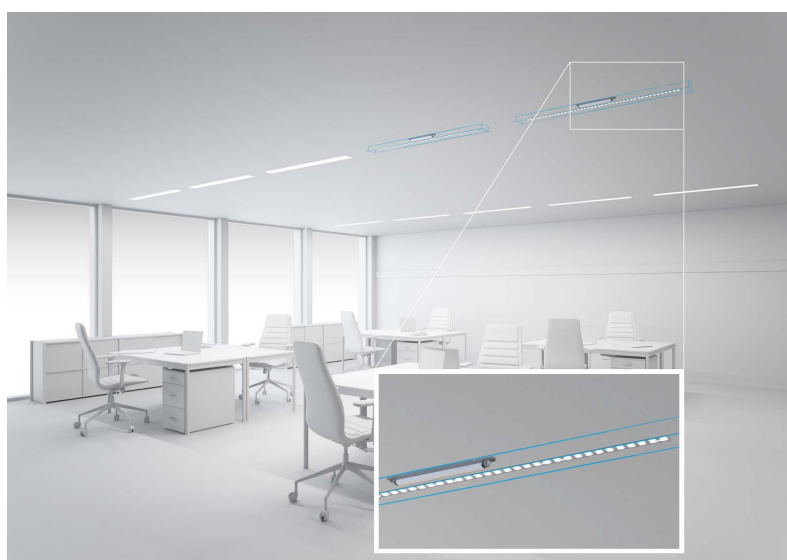




Module LLE 24mm 1250lm HV ADV6

Modules LLE advanced


Technical data

Colour consistency [®]	3 SDCM
ESD classification	severity level 2
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Lumen maintenance L70B50	72,000 h
Guarantee	5 year(s)


[®] Integral measurement over the complete module.

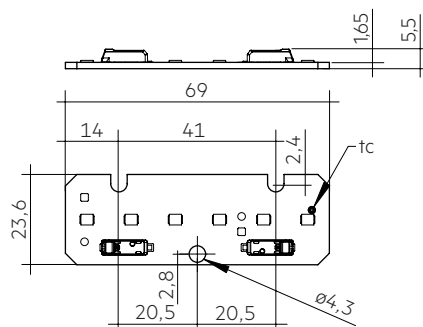


LLE 24x70mm 325lm HV ADV6

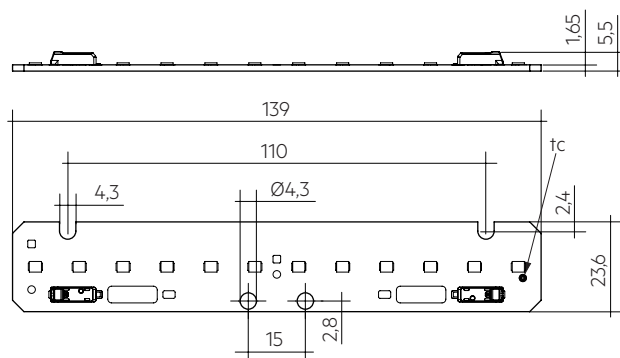

LLE 24x140mm 650lm HV ADV6

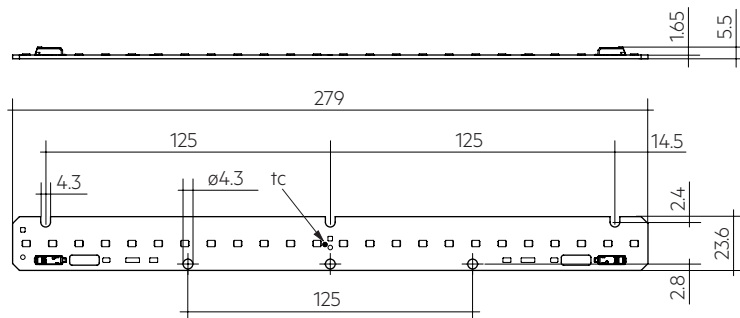

LLE 24x280mm 1250lm HV ADV6

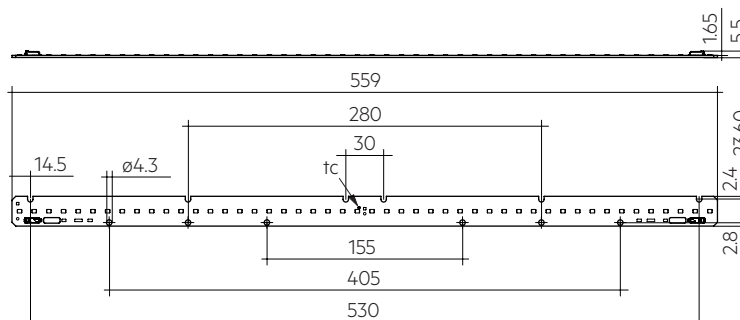

LLE 24x560mm 2400lm HV ADV6

Module LLE 24mm 1250lm HV ADV6

Modules LLE advanced

Ordering data

Type	Article number	Packaging carton	Weight per pc.
LLE 24x70mm 325lm 827 HV ADV6 QTY4	28004724	120 pc(s).	0.022 kg
LLE 24x70mm 325lm 830 HV ADV6 QTY4	28004725	120 pc(s).	0.022 kg
LLE 24x70mm 325lm 835 HV ADV6 QTY4	28004726	120 pc(s).	0.022 kg
LLE 24x70mm 325lm 840 HV ADV6 QTY4	28004727	120 pc(s).	0.022 kg
LLE 24x70mm 325lm 850 HV ADV6 QTY4	28004729	120 pc(s).	0.022 kg
LLE 24x70mm 325lm 865 HV ADV6 QTY4	28004730	120 pc(s).	0.022 kg
LLE 24x140mm 650lm 827 HV ADV6	28004750	420 pc(s).	0.011 kg
LLE 24x140mm 650lm 830 HV ADV6	28004751	420 pc(s).	0.011 kg
LLE 24x140mm 650lm 835 HV ADV6	28004752	420 pc(s).	0.011 kg
LLE 24x140mm 650lm 840 HV ADV6	28004753	420 pc(s).	0.011 kg
LLE 24x140mm 650lm 850 HV ADV6	28004754	420 pc(s).	0.011 kg
LLE 24x140mm 650lm 865 HV ADV6	28004755	420 pc(s).	0.011 kg
LLE 24x280mm 1250lm 827 HV ADV6	28004760	210 pc(s).	0.023 kg
LLE 24x280mm 1250lm 830 HV ADV6	28004761	210 pc(s).	0.023 kg
LLE 24x280mm 1250lm 835 HV ADV6	28004762	210 pc(s).	0.023 kg
LLE 24x280mm 1250lm 840 HV ADV6	28004763	210 pc(s).	0.023 kg
LLE 24x280mm 1250lm 840 HV ADV6 BT	28004764	240 pc(s).	0.023 kg
LLE 24x280mm 1250lm 850 HV ADV6	28004765	210 pc(s).	0.023 kg
LLE 24x280mm 1250lm 865 HV ADV6	28004766	210 pc(s).	0.023 kg
LLE 24x560mm 2400lm 827 HV ADV6	28004771	180 pc(s).	0.041 kg
LLE 24x560mm 2400lm 830 HV ADV6	28004772	180 pc(s).	0.041 kg
LLE 24x560mm 2400lm 835 HV ADV6	28004773	180 pc(s).	0.041 kg
LLE 24x560mm 2400lm 840 HV ADV6	28004774	180 pc(s).	0.041 kg
LLE 24x560mm 2400lm 840 HV ADV6 BT	28004775	120 pc(s).	0.041 kg
LLE 24x560mm 2400lm 850 HV ADV6	28004776	180 pc(s).	0.041 kg
LLE 24x560mm 2400lm 865 HV ADV6	28004777	180 pc(s).	0.041 kg

Photometric data

Type	Colour temperature	Photometric Code ^①	Useful luminous flux at tp = 25 °C ^②	Luminous flux at tp rated ^③			Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Beam characteristic	Colour rendering index CRI
				Min.	Typ.	Max.				
Operating mode HE										
LLE 24x70mm 325lm 827 HV ADV6 QTY4	2,700 K	827/359	–	92 lm	102 lm	112 lm	–	193 lm/W	120°	> 80
LLE 24x70mm 325lm 830 HV ADV6 QTY4	3,000 K	830/359	–	94 lm	104 lm	115 lm	–	197 lm/W	120°	> 80
LLE 24x70mm 325lm 835 HV ADV6 QTY4	3,500 K	835/359	–	97 lm	108 lm	118 lm	–	204 lm/W	120°	> 80
LLE 24x70mm 325lm 840 HV ADV6 QTY4	4,000 K	840/359	–	99 lm	110 lm	122 lm	–	209 lm/W	120°	> 80
LLE 24x70mm 325lm 850 HV ADV6 QTY4	5,000 K	850/359	–	99 lm	110 lm	121 lm	–	208 lm/W	120°	> 80
LLE 24x70mm 325lm 865 HV ADV6 QTY4	6,500 K	865/359	–	97 lm	108 lm	119 lm	–	205 lm/W	120°	> 80
LLE 24x140mm 650lm 827 HV ADV6	2,700 K	827/359	–	183 lm	203 lm	224 lm	–	193 lm/W	120°	> 80
LLE 24x140mm 650lm 830 HV ADV6	3,000 K	830/359	–	187 lm	208 lm	229 lm	–	197 lm/W	120°	> 80
LLE 24x140mm 650lm 835 HV ADV6	3,500 K	835/359	–	194 lm	215 lm	237 lm	–	204 lm/W	120°	> 80
LLE 24x140mm 650lm 840 HV ADV6	4,000 K	840/359	–	199 lm	221 lm	243 lm	–	209 lm/W	120°	> 80
LLE 24x140mm 650lm 850 HV ADV6	5,000 K	850/359	–	197 lm	219 lm	241 lm	–	208 lm/W	120°	> 80
LLE 24x140mm 650lm 865 HV ADV6	6,500 K	865/359	–	195 lm	216 lm	238 lm	–	205 lm/W	120°	> 80
LLE 24x280mm 1250lm 827 HV ADV6	2,700 K	827/359	–	366 lm	407 lm	448 lm	–	193 lm/W	120°	> 80
LLE 24x280mm 1250lm 830 HV ADV6	3,000 K	830/359	–	375 lm	416 lm	458 lm	–	197 lm/W	120°	> 80
LLE 24x280mm 1250lm 835 HV ADV6	3,500 K	835/359	–	387 lm	430 lm	474 lm	–	204 lm/W	120°	> 80
LLE 24x280mm 1250lm 840 HV ADV6	4,000 K	840/359	–	397 lm	442 lm	486 lm	–	209 lm/W	120°	> 80
LLE 24x280mm 1250lm 840 HV ADV6 BT	4,000 K	840/359	–	397 lm	442 lm	486 lm	–	209 lm/W	120°	> 80
LLE 24x280mm 1250lm 850 HV ADV6	5,000 K	850/359	–	395 lm	439 lm	483 lm	–	208 lm/W	120°	> 80
LLE 24x280mm 1250lm 865 HV ADV6	6,500 K	865/359	–	389 lm	433 lm	476 lm	–	205 lm/W	120°	> 80
LLE 24x560mm 2400lm 827 HV ADV6	2,700 K	827/359	–	732 lm	814 lm	895 lm	–	193 lm/W	120°	> 80
LLE 24x560mm 2400lm 830 HV ADV6	3,000 K	830/359	–	749 lm	832 lm	916 lm	–	197 lm/W	120°	> 80
LLE 24x560mm 2400lm 835 HV ADV6	3,500 K	835/359	–	775 lm	861 lm	947 lm	–	204 lm/W	120°	> 80
LLE 24x560mm 2400lm 840 HV ADV6	4,000 K	840/359	–	795 lm	883 lm	971 lm	–	209 lm/W	120°	> 80
LLE 24x560mm 2400lm 840 HV ADV6 BT	4,000 K	840/359	–	795 lm	883 lm	971 lm	–	209 lm/W	120°	> 80
LLE 24x560mm 2400lm 850 HV ADV6	5,000 K	850/359	–	790 lm	877 lm	965 lm	–	208 lm/W	120°	> 80
LLE 24x560mm 2400lm 865 HV ADV6	6,500 K	865/359	–	779 lm	866 lm	952 lm	–	205 lm/W	120°	> 80
Operating mode NM										
LLE 24x70mm 325lm 827 HV ADV6 QTY4	2,700 K	827/359	286 lm	247 lm	274 lm	302 lm	189 lm/W	183 lm/W	120°	> 80
LLE 24x70mm 325lm 830 HV ADV6 QTY4	3,000 K	830/359	293 lm	253 lm	281 lm	309 lm	193 lm/W	187 lm/W	120°	> 80
LLE 24x70mm 325lm 835 HV ADV6 QTY4	3,500 K	835/359	302 lm	261 lm	290 lm	319 lm	200 lm/W	193 lm/W	120°	> 80
LLE 24x70mm 325lm 840 HV ADV6 QTY4	4,000 K	840/359	310 lm	268 lm	298 lm	328 lm	205 lm/W	198 lm/W	120°	> 80
LLE 24x70mm 325lm 850 HV ADV6 QTY4	5,000 K	850/359	308 lm	266 lm	296 lm	326 lm	203 lm/W	197 lm/W	120°	> 80
LLE 24x70mm 325lm 865 HV ADV6 QTY4	6,500 K	865/359	304 lm	263 lm	292 lm	321 lm	201 lm/W	194 lm/W	120°	> 80
LLE 24x140mm 650lm 827 HV ADV6	2,700 K	827/359	572 lm	494 lm	549 lm	604 lm	188 lm/W	183 lm/W	120°	> 80
LLE 24x140mm 650lm 830 HV ADV6	3,000 K	830/359	585 lm	505 lm	562 lm	618 lm	193 lm/W	187 lm/W	120°	> 80
LLE 24x140mm 650lm 835 HV ADV6	3,500 K	835/359	605 lm	523 lm	581 lm	639 lm	199 lm/W	193 lm/W	120°	> 80
LLE 24x140mm 650lm 840 HV ADV6	4,000 K	840/359	621 lm	536 lm	596 lm	655 lm	205 lm/W	198 lm/W	120°	> 80
LLE 24x140mm 650lm 850 HV ADV6	5,000 K	850/359	617 lm	533 lm	592 lm	651 lm	203 lm/W	197 lm/W	120°	> 80
LLE 24x140mm 650lm 865 HV ADV6	6,500 K	865/359	608 lm	525 lm	584 lm	642 lm	201 lm/W	194 lm/W	120°	> 80
LLE 24x280mm 1250lm 827 HV ADV6	2,700 K	827/359	1,144 lm	988 lm	1,098 lm	1,207 lm	188 lm/W	183 lm/W	120°	> 80
LLE 24x280mm 1250lm 830 HV ADV6	3,000 K	830/359	1,170 lm	1,011 lm	1,123 lm	1,235 lm	193 lm/W	187 lm/W	120°	> 80
LLE 24x280mm 1250lm 835 HV ADV6	3,500 K	835/359	1,210 lm	1,045 lm	1,161 lm	1,277 lm	199 lm/W	193 lm/W	120°	> 80
LLE 24x280mm 1250lm 840 HV ADV6	4,000 K	840/359	1,241 lm	1,072 lm	1,191 lm	1,310 lm	205 lm/W	198 lm/W	120°	> 80
LLE 24x280mm 1250lm 840 HV ADV6 BT	4,000 K	840/359	1,241 lm	1,072 lm	1,191 lm	1,310 lm	205 lm/W	198 lm/W	120°	> 80
LLE 24x280mm 1250lm 850 HV ADV6	5,000 K	850/359	1,233 lm	1,065 lm	1,183 lm	1,302 lm	203 lm/W	197 lm/W	120°	> 80
LLE 24x280mm 1250lm 865 HV ADV6	6,500 K	865/359	1,216 lm	1,051 lm	1,168 lm	1,284 lm	201 lm/W	194 lm/W	120°	> 80
LLE 24x560mm 2400lm 827 HV ADV6	2,700 K	827/359	2,287 lm	1,976 lm	2,195 lm	2,415 lm	189 lm/W	183 lm/W	120°	> 80
LLE 24x560mm 2400lm 830 HV ADV6	3,000 K	830/359	2,340 lm	2,021 lm	2,246 lm	2,471 lm	193 lm/W	187 lm/W	120°	> 80
LLE 24x560mm 2400lm 835 HV ADV6	3,500 K	835/359	2,420 lm	2,090 lm	2,322 lm	2,555 lm	199 lm/W	193 lm/W	120°	> 80
LLE 24x560mm 2400lm 840 HV ADV6	4,000 K	840/359	2,482 lm	2,144 lm	2,382 lm	2,620 lm	205 lm/W	198 lm/W	120°	> 80
LLE 24x560mm 2400lm 840 HV ADV6 BT	4,000 K	840/359	2,482 lm	2,144 lm	2,382 lm	2,620 lm	205 lm/W	198 lm/W	120°	> 80
LLE 24x560mm 2400lm 850 HV ADV6	5,000 K	850/359	2,466 lm	2,130 lm	2,367 lm	2,604 lm	203 lm/W	197 lm/W	120°	> 80
LLE 24x560mm 2400lm 865 HV ADV6	6,500 K	865/359	2,433 lm	2,102 lm	2,335 lm	2,569 lm	201 lm/W	194 lm/W	120°	> 80

^① The detailed explanation, see data sheet section 1.1.

^② Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

^③ Measurement uncertainty ± 10 %. Based on calculation.

Photometric data

Type	Colour temperature	Photometric Code ^①	Useful luminous flux at tp = 25 °C ^②	Luminous flux at tp rated ^③			Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Beam characteristic	Colour rendering index CRI
				Min.	Typ.	Max.				
Operating mode HO										
LLE 24x70mm 325lm 827 HV ADV6 QTY4	2,700 K	827/359	–	586 lm	651 lm	717 lm	–	160 lm/W	120°	> 80
LLE 24x70mm 325lm 830 HV ADV6 QTY4	3,000 K	830/359	–	600 lm	667 lm	733 lm	–	164 lm/W	120°	> 80
LLE 24x70mm 325lm 835 HV ADV6 QTY4	3,500 K	835/359	–	620 lm	689 lm	758 lm	–	170 lm/W	120°	> 80
LLE 24x70mm 325lm 840 HV ADV6 QTY4	4,000 K	840/359	–	636 lm	707 lm	778 lm	–	174 lm/W	120°	> 80
LLE 24x70mm 325lm 850 HV ADV6 QTY4	5,000 K	850/359	–	632 lm	702 lm	773 lm	–	173 lm/W	120°	> 80
LLE 24x70mm 325lm 865 HV ADV6 QTY4	6,500 K	865/359	–	624 lm	693 lm	762 lm	–	171 lm/W	120°	> 80
LLE 24x140mm 650lm 827 HV ADV6	2,700 K	827/359	–	1,173 lm	1,303 lm	1,433 lm	–	161 lm/W	120°	> 80
LLE 24x140mm 650lm 830 HV ADV6	3,000 K	830/359	–	1,200 lm	1,333 lm	1,466 lm	–	164 lm/W	120°	> 80
LLE 24x140mm 650lm 835 HV ADV6	3,500 K	835/359	–	1,240 lm	1,378 lm	1,516 lm	–	170 lm/W	120°	> 80
LLE 24x140mm 650lm 840 HV ADV6	4,000 K	840/359	–	1,272 lm	1,414 lm	1,555 lm	–	174 lm/W	120°	> 80
LLE 24x140mm 650lm 850 HV ADV6	5,000 K	850/359	–	1,264 lm	1,405 lm	1,545 lm	–	173 lm/W	120°	> 80
LLE 24x140mm 650lm 865 HV ADV6	6,500 K	865/359	–	1,247 lm	1,386 lm	1,524 lm	–	171 lm/W	120°	> 80
LLE 24x280mm 1250lm 827 HV ADV6	2,700 K	827/359	–	2,345 lm	2,606 lm	2,866 lm	–	161 lm/W	120°	> 80
LLE 24x280mm 1250lm 830 HV ADV6	3,000 K	830/359	–	2,399 lm	2,666 lm	2,933 lm	–	164 lm/W	120°	> 80
LLE 24x280mm 1250lm 835 HV ADV6	3,500 K	835/359	–	2,481 lm	2,757 lm	3,032 lm	–	170 lm/W	120°	> 80
LLE 24x280mm 1250lm 840 HV ADV6	4,000 K	840/359	–	2,545 lm	2,828 lm	3,110 lm	–	174 lm/W	120°	> 80
LLE 24x280mm 1250lm 840 HV ADV6 BT	4,000 K	840/359	–	2,545 lm	2,828 lm	3,110 lm	–	174 lm/W	120°	> 80
LLE 24x280mm 1250lm 850 HV ADV6	5,000 K	850/359	–	2,528 lm	2,809 lm	3,090 lm	–	173 lm/W	120°	> 80
LLE 24x280mm 1250lm 865 HV ADV6	6,500 K	865/359	–	2,495 lm	2,772 lm	3,049 lm	–	171 lm/W	120°	> 80
LLE 24x560mm 2400lm 827 HV ADV6	2,700 K	827/359	–	4,690 lm	5,211 lm	5,732 lm	–	161 lm/W	120°	> 80
LLE 24x560mm 2400lm 830 HV ADV6	3,000 K	830/359	–	4,799 lm	5,332 lm	5,865 lm	–	164 lm/W	120°	> 80
LLE 24x560mm 2400lm 835 HV ADV6	3,500 K	835/359	–	4,962 lm	5,513 lm	6,065 lm	–	170 lm/W	120°	> 80
LLE 24x560mm 2400lm 840 HV ADV6	4,000 K	840/359	–	5,090 lm	5,655 lm	6,221 lm	–	174 lm/W	120°	> 80
LLE 24x560mm 2400lm 840 HV ADV6 BT	4,000 K	840/359	–	5,090 lm	5,655 lm	6,221 lm	–	174 lm/W	120°	> 80
LLE 24x560mm 2400lm 850 HV ADV6	5,000 K	850/359	–	5,057 lm	5,619 lm	6,181 lm	–	173 lm/W	120°	> 80
LLE 24x560mm 2400lm 865 HV ADV6	6,500 K	865/359	–	4,989 lm	5,543 lm	6,098 lm	–	171 lm/W	120°	> 80

^① The detailed explanation, see data sheet section 1.1.

^② Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

^③ Measurement uncertainty ± 10 %. Based on calculation.

Electrical data

Type	Forward current	Min. forward voltage at tp rated	Typ. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C [®]	Energy classification	Energy consumption	Type of light source
Operating mode HE								
LLE 24x70mm 325lm 827 HV ADV6 QTY4	100 mA	5.0 V	5.3 V	5.5 V	–	–	–	–
LLE 24x70mm 325lm 830 HV ADV6 QTY4	100 mA	5.0 V	5.3 V	5.5 V	–	–	–	–
LLE 24x70mm 325lm 835 HV ADV6 QTY4	100 mA	5.0 V	5.3 V	5.5 V	–	–	–	–
LLE 24x70mm 325lm 840 HV ADV6 QTY4	100 mA	5.0 V	5.3 V	5.5 V	–	–	–	–
LLE 24x70mm 325lm 850 HV ADV6 QTY4	100 mA	5.0 V	5.3 V	5.5 V	–	–	–	–
LLE 24x70mm 325lm 865 HV ADV6 QTY4	100 mA	5.0 V	5.3 V	5.5 V	–	–	–	–
LLE 24x140mm 650lm 827 HV ADV6	100 mA	10.1 V	10.6 V	11.0 V	–	–	–	–
LLE 24x140mm 650lm 830 HV ADV6	100 mA	10.1 V	10.6 V	11.0 V	–	–	–	–
LLE 24x140mm 650lm 835 HV ADV6	100 mA	10.1 V	10.6 V	11.0 V	–	–	–	–
LLE 24x140mm 650lm 840 HV ADV6	100 mA	10.1 V	10.6 V	11.0 V	–	–	–	–
LLE 24x140mm 650lm 850 HV ADV6	100 mA	10.1 V	10.6 V	11.0 V	–	–	–	–
LLE 24x140mm 650lm 865 HV ADV6	100 mA	10.1 V	10.6 V	11.0 V	–	–	–	–
LLE 24x280mm 1250lm 827 HV ADV6	100 mA	20.2 V	21.1 V	22.0 V	–	–	–	–
LLE 24x280mm 1250lm 830 HV ADV6	100 mA	20.2 V	21.1 V	22.0 V	–	–	–	–
LLE 24x280mm 1250lm 835 HV ADV6	100 mA	20.2 V	21.1 V	22.0 V	–	–	–	–
LLE 24x280mm 1250lm 840 HV ADV6	100 mA	20.2 V	21.1 V	22.0 V	–	–	–	–
LLE 24x280mm 1250lm 840 HV ADV6 BT	100 mA	20.2 V	21.1 V	22.0 V	–	–	–	–
LLE 24x280mm 1250lm 850 HV ADV6	100 mA	20.2 V	21.1 V	22.0 V	–	–	–	–
LLE 24x280mm 1250lm 865 HV ADV6	100 mA	20.2 V	21.1 V	22.0 V	–	–	–	–
LLE 24x560mm 2400lm 827 HV ADV6	100 mA	40.3 V	42.2 V	43.9 V	–	–	–	–
LLE 24x560mm 2400lm 830 HV ADV6	100 mA	40.3 V	42.2 V	43.9 V	–	–	–	–
LLE 24x560mm 2400lm 835 HV ADV6	100 mA	40.3 V	42.2 V	43.9 V	–	–	–	–
LLE 24x560mm 2400lm 840 HV ADV6	100 mA	40.3 V	42.2 V	43.9 V	–	–	–	–
LLE 24x560mm 2400lm 840 HV ADV6 BT	100 mA	40.3 V	42.2 V	43.9 V	–	–	–	–
LLE 24x560mm 2400lm 850 HV ADV6	100 mA	40.3 V	42.2 V	43.9 V	–	–	–	–
LLE 24x560mm 2400lm 865 HV ADV6	100 mA	40.3 V	42.2 V	43.9 V	–	–	–	–
Operating mode NM								
LLE 24x70mm 325lm 827 HV ADV6 QTY4	275 mA	5.2 V	5.5 V	5.7 V	1.5 W	C	2 kWh / 1,000 h	non-directional
LLE 24x70mm 325lm 830 HV ADV6 QTY4	275 mA	5.2 V	5.5 V	5.7 V	1.5 W	C	2 kWh / 1,000 h	non-directional
LLE 24x70mm 325lm 835 HV ADV6 QTY4	275 mA	5.2 V	5.5 V	5.7 V	1.5 W	C	2 kWh / 1,000 h	non-directional
LLE 24x70mm 325lm 840 HV ADV6 QTY4	275 mA	5.2 V	5.5 V	5.7 V	1.5 W	B	2 kWh / 1,000 h	non-directional
LLE 24x70mm 325lm 850 HV ADV6 QTY4	275 mA	5.2 V	5.5 V	5.7 V	1.5 W	B	2 kWh / 1,000 h	non-directional
LLE 24x70mm 325lm 865 HV ADV6 QTY4	275 mA	5.2 V	5.5 V	5.7 V	1.5 W	B	2 kWh / 1,000 h	non-directional
LLE 24x140mm 650lm 827 HV ADV6	275 mA	10.4 V	10.9 V	11.4 V	3.0 W	C	4 kWh / 1,000 h	non-directional
LLE 24x140mm 650lm 830 HV ADV6	275 mA	10.4 V	10.9 V	11.4 V	3.0 W	C	4 kWh / 1,000 h	non-directional
LLE 24x140mm 650lm 835 HV ADV6	275 mA	10.4 V	10.9 V	11.4 V	3.0 W	B	4 kWh / 1,000 h	non-directional
LLE 24x140mm 650lm 840 HV ADV6	275 mA	10.4 V	10.9 V	11.4 V	3.0 W	B	4 kWh / 1,000 h	non-directional
LLE 24x140mm 650lm 850 HV ADV6	275 mA	10.4 V	10.9 V	11.4 V	3.0 W	B	4 kWh / 1,000 h	non-directional
LLE 24x140mm 650lm 865 HV ADV6	275 mA	10.4 V	10.9 V	11.4 V	3.0 W	B	4 kWh / 1,000 h	non-directional
LLE 24x280mm 1250lm 827 HV ADV6	275 mA	20.9 V	21.9 V	22.7 V	6.1 W	C	7 kWh / 1,000 h	non-directional
LLE 24x280mm 1250lm 830 HV ADV6	275 mA	20.9 V	21.9 V	22.7 V	6.1 W	C	7 kWh / 1,000 h	non-directional
LLE 24x280mm 1250lm 835 HV ADV6	275 mA	20.9 V	21.9 V	22.7 V	6.1 W	C	7 kWh / 1,000 h	non-directional
LLE 24x280mm 1250lm 840 HV ADV6	275 mA	20.9 V	21.9 V	22.7 V	6.1 W	B	7 kWh / 1,000 h	non-directional
LLE 24x280mm 1250lm 840 HV ADV6 BT	275 mA	20.9 V	21.9 V	22.7 V	6.1 W	B	7 kWh / 1,000 h	non-directional
LLE 24x280mm 1250lm 850 HV ADV6	275 mA	20.9 V	21.9 V	22.7 V	6.1 W	B	7 kWh / 1,000 h	non-directional
LLE 24x280mm 1250lm 865 HV ADV6	275 mA	20.9 V	21.9 V	22.7 V	6.1 W	B	7 kWh / 1,000 h	non-directional
LLE 24x560mm 2400lm 827 HV ADV6	275 mA	41.8 V	43.7 V	45.4 V	12.1 W	C	13 kWh / 1,000 h	non-directional
LLE 24x560mm 2400lm 830 HV ADV6	275 mA	41.8 V	43.7 V	45.4 V	12.1 W	C	13 kWh / 1,000 h	non-directional
LLE 24x560mm 2400lm 835 HV ADV6	275 mA	41.8 V	43.7 V	45.4 V	12.1 W	C	13 kWh / 1,000 h	non-directional
LLE 24x560mm 2400lm 840 HV ADV6	275 mA	41.8 V	43.7 V	45.4 V	12.1 W	B	13 kWh / 1,000 h	non-directional
LLE 24x560mm 2400lm 840 HV ADV6 BT	275 mA	41.8 V	43.7 V	45.4 V	12.1 W	B	13 kWh / 1,000 h	non-directional
LLE 24x560mm 2400lm 850 HV ADV6	275 mA	41.8 V	43.7 V	45.4 V	12.1 W	B	13 kWh / 1,000 h	non-directional
LLE 24x560mm 2400lm 865 HV ADV6	275 mA	41.8 V	43.7 V	45.4 V	12.1 W	B	13 kWh / 1,000 h	non-directional

[®] Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.

Electrical data

Type	Forward current	Min. forward voltage at tp rated	Typ. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C ^①	Energy classification	Energy consumption	Type of light source
Operating mode HO								
LLE 24x70mm 325lm 827 HV ADV6 QTY4	700 mA	5.5 V	5.8 V	6.0 V	–	–	–	–
LLE 24x70mm 325lm 830 HV ADV6 QTY4	700 mA	5.5 V	5.8 V	6.0 V	–	–	–	–
LLE 24x70mm 325lm 835 HV ADV6 QTY4	700 mA	5.5 V	5.8 V	6.0 V	–	–	–	–
LLE 24x70mm 325lm 840 HV ADV6 QTY4	700 mA	5.5 V	5.8 V	6.0 V	–	–	–	–
LLE 24x70mm 325lm 850 HV ADV6 QTY4	700 mA	5.5 V	5.8 V	6.0 V	–	–	–	–
LLE 24x70mm 325lm 865 HV ADV6 QTY4	700 mA	5.5 V	5.8 V	6.0 V	–	–	–	–
LLE 24x140mm 650lm 827 HV ADV6	700 mA	11.1 V	11.6 V	12.0 V	–	–	–	–
LLE 24x140mm 650lm 830 HV ADV6	700 mA	11.1 V	11.6 V	12.0 V	–	–	–	–
LLE 24x140mm 650lm 835 HV ADV6	700 mA	11.1 V	11.6 V	12.0 V	–	–	–	–
LLE 24x140mm 650lm 840 HV ADV6	700 mA	11.1 V	11.6 V	12.0 V	–	–	–	–
LLE 24x140mm 650lm 850 HV ADV6	700 mA	11.1 V	11.6 V	12.0 V	–	–	–	–
LLE 24x140mm 650lm 865 HV ADV6	700 mA	11.1 V	11.6 V	12.0 V	–	–	–	–
LLE 24x280mm 1250lm 827 HV ADV6	700 mA	22.2 V	23.2 V	24.0 V	–	–	–	–
LLE 24x280mm 1250lm 830 HV ADV6	700 mA	22.2 V	23.2 V	24.0 V	–	–	–	–
LLE 24x280mm 1250lm 835 HV ADV6	700 mA	22.2 V	23.2 V	24.0 V	–	–	–	–
LLE 24x280mm 1250lm 840 HV ADV6	700 mA	22.2 V	23.2 V	24.0 V	–	–	–	–
LLE 24x280mm 1250lm 840 HV ADV6 BT	700 mA	22.2 V	23.2 V	24.0 V	–	–	–	–
LLE 24x280mm 1250lm 850 HV ADV6	700 mA	22.2 V	23.2 V	24.0 V	–	–	–	–
LLE 24x280mm 1250lm 865 HV ADV6	700 mA	22.2 V	23.2 V	24.0 V	–	–	–	–
LLE 24x560mm 2400lm 827 HV ADV6	700 mA	44.4 V	46.3 V	48.1 V	–	–	–	–
LLE 24x560mm 2400lm 830 HV ADV6	700 mA	44.4 V	46.3 V	48.1 V	–	–	–	–
LLE 24x560mm 2400lm 835 HV ADV6	700 mA	44.4 V	46.3 V	48.1 V	–	–	–	–
LLE 24x560mm 2400lm 840 HV ADV6	700 mA	44.4 V	46.3 V	48.1 V	–	–	–	–
LLE 24x560mm 2400lm 840 HV ADV6 BT	700 mA	44.4 V	46.3 V	48.1 V	–	–	–	–
LLE 24x560mm 2400lm 850 HV ADV6	700 mA	44.4 V	46.3 V	48.1 V	–	–	–	–
LLE 24x560mm 2400lm 865 HV ADV6	700 mA	44.4 V	46.3 V	48.1 V	–	–	–	–

^① Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.


Specific technical data

Type	Irated	I _{max}	Max. permissible LF current ripple	Max. permissible peak current / max. pulse width	Max. working voltage for insulation ^①	Electrical strength	ta	tp rated	tc
LLE 24x70mm 325lm 827 HV ADV6 QTY4	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x70mm 325lm 830 HV ADV6 QTY4	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x70mm 325lm 835 HV ADV6 QTY4	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x70mm 325lm 840 HV ADV6 QTY4	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x70mm 325lm 850 HV ADV6 QTY4	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x70mm 325lm 865 HV ADV6 QTY4	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x140mm 650lm 827 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x140mm 650lm 830 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x140mm 650lm 835 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x140mm 650lm 840 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x140mm 650lm 850 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x140mm 650lm 865 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x280mm 1250lm 827 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x280mm 1250lm 830 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x280mm 1250lm 835 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x280mm 1250lm 840 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x280mm 1250lm 840 HV ADV6 BT	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x280mm 1250lm 850 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x280mm 1250lm 865 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x560mm 2400lm 827 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x560mm 2400lm 830 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x560mm 2400lm 835 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x560mm 2400lm 840 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x560mm 2400lm 840 HV ADV6 BT	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x560mm 2400lm 850 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C
LLE 24x560mm 2400lm 865 HV ADV6	275 mA	800 mA	900 mA	1,350 mA / 10 ms	440 V	1.88 kV	-40 ... +65 °C	50 °C	85 °C

^① If mounted with M4 screws with 7 mm head diameter.

Product description

- LINEAR COVER for LLE 24
- Protection against direct touch for non-SELV applications
(recommendation: use all fixing points)
- Fast snap on mounting on to LLE 24 with clips or plastic washers
- High transmission: transparent 94 %, semi-transparent 87 %, diffuse 76 %
- Made of PMMA
- Tolerances: ± 1 mm for 597 mm length (ends finished),
+ 10 mm for 1,200 / 1,500 / 1,600 / 1,800 mm length (ends raw)

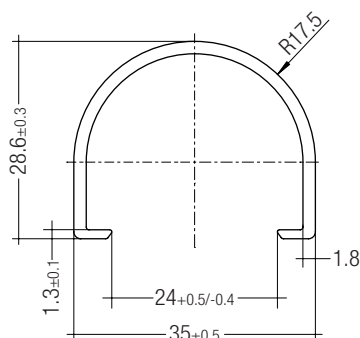

Ordering data

Type	Article number	Colour	Length	Packaging carton	Weight per pc.
LINEAR COVER SY Transparent 1600mm	28000338	Transparent	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Frosted 1800mm	28000437	Semi-transparent	1,800 mm	12 pc(s).	0.308 kg
LINEAR COVER SY Frosted 1600mm	28000339	Semi-transparent	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Frosted 1500mm	28000435	Semi-transparent	1,500 mm	12 pc(s).	0.244 kg
LINEAR COVER SY Frosted 1200mm	28000422	Semi-transparent	1,200 mm	12 pc(s).	0.205 kg
LINEAR COVER SY Frosted 597mm	28000340	Semi-transparent	597 mm	12 pc(s).	0.102 kg
LINEAR COVER SY Diffuse 1800mm	28000438	Diffuse	1,800 mm	12 pc(s).	0.308 kg
LINEAR COVER SY Diffuse 1600mm	28000341	Diffuse	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Diffuse 1500mm	28000436	Diffuse	1,500 mm	12 pc(s).	0.257 kg
LINEAR COVER SY Diffuse 1200mm	28000434	Diffuse	1,200 mm	12 pc(s).	0.205 kg
LINEAR COVER SY Diffuse 597mm	28000342	Diffuse	597 mm	12 pc(s).	0.102 kg

Product description


- ENDCAP for LLE 24
- PUSH-FIX: Fast snap on mounting (sheet thickness 0.5 – 1.0 mm), for drilling hole 4 mm
- SCREW-FIX: Screw mounting with EJOT Delta PT WN 5451 30x8 (not included), tightening torque 0.7 Nm
- Made of Polycarbonat




ACL ENDCAP LLE24 PUSH-FIX



ACL ENDCAP LLE24 SCREW-FIX



ACL ENDCAP LLE24 PUSH-FIX

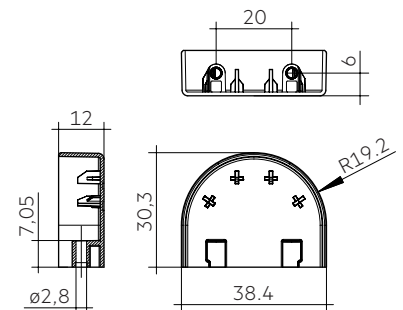

ACL ENDCAP LLE24 SCREW-FIX

Ordering data

Type	Article number	Colour	Packaging carton	Weight per pc.
ACL ENDCAP LLE24 PUSH-FIX	28001037	White	480 pc(s).	0.003 kg
ACL ENDCAP LLE24 SCREW-FIX	28002315	White	480 pc(s).	0.003 kg

Product description LINEAR LENS

- Linear lens for LLE 24
- Available with different beam characteristics
- Protection against direct touch for non-SELV applications (recommendation: use all fixing points)
- Fast snap on mounting on to LLE 24 with clips or plastic washers
- Recommendation: Fastening with screws and plastic washers, see 2.3 Heat sink specifications
- Linear lense made of PMMA
- Available lengths: 1,200, 1,500, 1,600 and 1,800 mm, Tolerance: + 10 mm (ends raw)
- Max. permissible temperature 80 °C
- Photometric data available on website

Product description Endcap

- ENDCAP for LINEAR LENS 24mm INTENSE, ASY and DASY
- Mounting by clipping in and screwing from below using screw EJOT Delta PT WN 5451 20x4, tightening torque 0.7 Nm
- Made of Polyamide UL94 V0



ACL LINEAR LENS 24mm 60°



ACL LINEAR LENS 24mm 90°



ACL LINEAR LENS 24mm INTENSE



ACL LINEAR LENS 24mm BATWING



ACL LINEAR LENS 24mm ASY




ACL LINEAR LENS 24mm DASY




ACL Endcap LENS 24mm PSF


ACL LENS 24mm

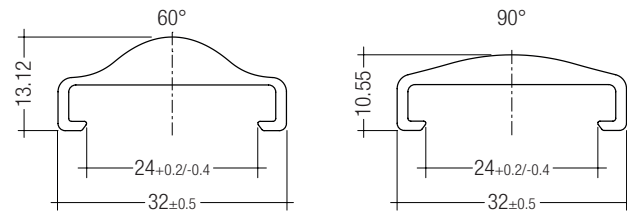


ACL LINEAR LENS 24mm 60° and 90°

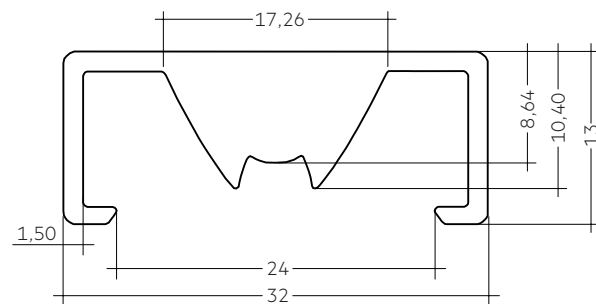


ACL LINEAR LENS 24mm INTENSE

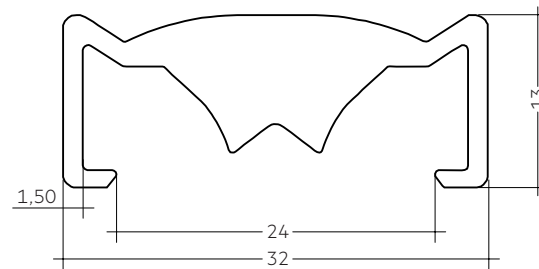

ACL LINEAR LENS 24mm BATWING

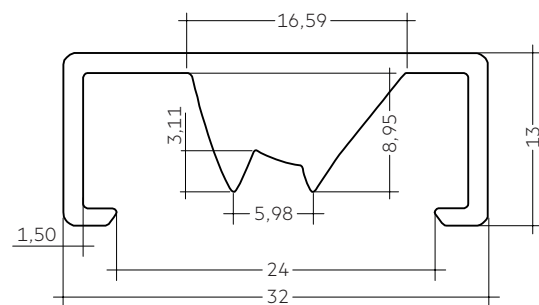


ACL LINEAR LENS 24mm ASY

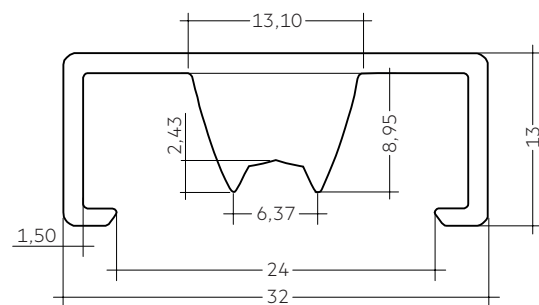

ACL LINEAR LENS 24mm DASY

ACL LENS 24mm

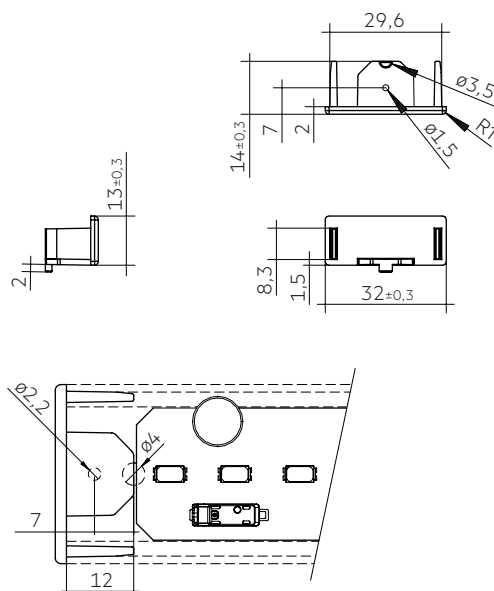

ACL Endcap LENS 24mm PSF

Ordering data

Type	Article number	Beam characteristic	Efficiency	Packaging carton	Weight per pc.
ACL LINEAR LENS 24x1200mm 60°	28001428	60°	97 %	21 pc(s).	0.196 kg
ACL LINEAR LENS 24x1200mm 90°	28001429	90°	97 %	21 pc(s).	0.165 kg
ACL LINEAR LENS 24x1500mm 60°	28000953	60°	97 %	21 pc(s).	0.261 kg
ACL LINEAR LENS 24x1500mm 90°	28000955	90°	97 %	21 pc(s).	0.221 kg
ACL LINEAR LENS 24x1200mm INTENSE	28002024	40°	95 %	18 pc(s).	0.261 kg
ACL LINEAR LENS 24x1500mm INTENSE	28002025	40°	95 %	18 pc(s).	0.326 kg
ACL LINEAR LENS 24x1800mm INTENSE	28002026	40°	95 %	18 pc(s).	0.392 kg
ACL LINEAR LENS 24x1200mm BATWING	28002027	batwing	95 %	18 pc(s).	0.275 kg
ACL LINEAR LENS 24x1500mm BATWING	28002028	batwing	95 %	18 pc(s).	0.344 kg
ACL LINEAR LENS 24x1800mm BATWING	28002029	batwing	95 %	18 pc(s).	0.412 kg
ACL LINEAR LENS 24x1200mm ASY	28002030	asymmetric	95 %	18 pc(s).	0.250 kg
ACL LINEAR LENS 24x1500mm ASY	28002031	asymmetric	95 %	18 pc(s).	0.312 kg
ACL LINEAR LENS 24x1800mm ASY	28002032	asymmetric	95 %	18 pc(s).	0.375 kg
ACL LINEAR LENS 24x1200mm DASY	28002033	double asymmetric	92 %	18 pc(s).	0.249 kg
ACL LINEAR LENS 24x1500mm DASY	28002034	double asymmetric	92 %	18 pc(s).	0.311 kg
ACL LINEAR LENS 24x1800mm DASY	28002035	double asymmetric	92 %	18 pc(s).	0.373 kg
ACL Endcap LENS 24mm PSF	28002669	–	–	3,600 pc(s).	0.003 kg

**ACCES-
SORIES**


CLIP 4.3mm

Product description

- Clip for fixation of LED modules with 4.3 mm holes
- Fast snap on mounting (sheet thickness 0.5 – 1.0 mm for PUSH-FIX and 1 – 2 mm for PUSH-FIX Long)
- For drilling hole 4 mm
- Clip made of Polycarbonat




ACL CLIP 4.3mm PUSH-FIX

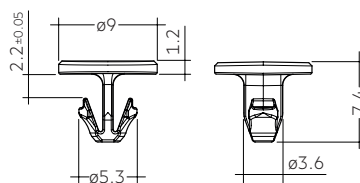

ACL CLIP 4.3mm PUSH-FIX



ACL CLIP 4.3mm PUSH-FIX Long

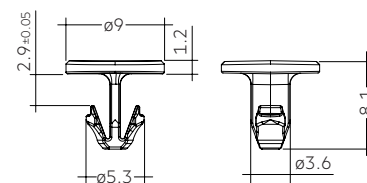

ACL CLIP 4.3mm PUSH-FIX Long

Ordering data

Type	Article number	Colour	Packaging bag ^①	Weight per pc.
ACL CLIP 4.3mm PUSH-FIX	28001036	White	500 pc(s).	0.001 kg
ACL CLIP 4.3mm PUSH-FIX Long	28002314	Transparent	500 pc(s).	0.001 kg


^① Minimum sales quantity 500 pcs.

**ACCES-
SORIES**

BRIDGE LLE24/40

Product description

- Enables the fixation of 24 mm wide Tridonic LED modules to fixtures made for 40 mm wide modules
- Ideal for extruded aluminium gear trays made for 40 mm modules with pre-alignment knobs
- Clip-on for LINEAR COVER and LINEAR LENS[®]
- For LLE 24 with 280 mm module minimum 2 bridges required
- For LLE 24 with 560 mm module minimum 3 bridges required
- Fixation via M3 or M4 countersunk screw, max. tightening torque 0.5 Nm
- BRIDGE made of white polycarbonate

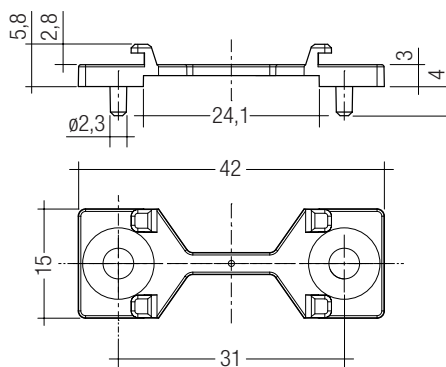

Ordering data

Type	Article number	Colour	Packaging carton ^①	Weight per pc.
ACL BRIDGE LLE24/40 SCREW-FIX	28001205	White	600 Stk.	0.001 kg

^① Minimum sales quantity 600 pcs.

[®] Beam characteristics will change due to the elevated fixation (see photometric files for details).

1. Standards

IEC 62031
IEC 62471
IEC 61000-4-2
IEC 62778
IEC 61547

1.1 Photometric code

Key for photometric code, e. g. 830 / 349

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)
7				Code
8				Luminous flux
9				
70 – 79	80 – 89	≥90	≥ 70 %	7
80 – 89				8
≥90				9

1.2 Risk group

Forward current	Risk group (IEC 62471)
≤ 280 mA	RG0
> 280 – 800 mA (Imax)	RG1

1.3 Energy classification

Type	Colour temperature	Forward current	Energy classification	Energy consumption
LLE 24x70mm 325lm 827 HV ADV6 QTY4	2,700 K	275 mA	C	2 kWh / 1,000 h
LLE 24x70mm 325lm 830 HV ADV6 QTY4	3,000 K	275 mA	C	2 kWh / 1,000 h
LLE 24x70mm 325lm 835 HV ADV6 QTY4	3,500 K	275 mA	C	2 kWh / 1,000 h
LLE 24x70mm 325lm 840 HV ADV6 QTY4	4,000 K	275 mA	B	2 kWh / 1,000 h
LLE 24x70mm 325lm 850 HV ADV6 QTY4	5,000 K	275 mA	B	2 kWh / 1,000 h
LLE 24x70mm 325lm 865 HV ADV6 QTY4	6,500 K	275 mA	B	2 kWh / 1,000 h
LLE 24x140mm 650lm 827 HV ADV6	2,700 K	275 mA	C	4 kWh / 1,000 h
LLE 24x140mm 650lm 830 HV ADV6	3,000 K	275 mA	C	4 kWh / 1,000 h
LLE 24x140mm 650lm 835 HV ADV6	3,500 K	275 mA	B	4 kWh / 1,000 h
LLE 24x140mm 650lm 840 HV ADV6	4,000 K	275 mA	B	4 kWh / 1,000 h
LLE 24x140mm 650lm 850 HV ADV6	5,000 K	275 mA	B	4 kWh / 1,000 h
LLE 24x140mm 650lm 865 HV ADV6	6,500 K	275 mA	B	4 kWh / 1,000 h
LLE 24x280mm 1250lm 827 HV ADV6	2,700 K	275 mA	C	7 kWh / 1,000 h
LLE 24x280mm 1250lm 830 HV ADV6	3,000 K	275 mA	C	7 kWh / 1,000 h
LLE 24x280mm 1250lm 835 HV ADV6	3,500 K	275 mA	C	7 kWh / 1,000 h
LLE 24x280mm 1250lm 840 HV ADV6	4,000 K	275 mA	B	7 kWh / 1,000 h
LLE 24x280mm 1250lm 840 HV ADV6 BT	4,000 K	275 mA	B	7 kWh / 1,000 h
LLE 24x280mm 1250lm 850 HV ADV6	5,000 K	275 mA	B	7 kWh / 1,000 h
LLE 24x280mm 1250lm 865 HV ADV6	6,500 K	275 mA	B	7 kWh / 1,000 h
LLE 24x560mm 2400lm 827 HV ADV6	2,700 K	275 mA	C	13 kWh / 1,000 h
LLE 24x560mm 2400lm 830 HV ADV6	3,000 K	275 mA	C	13 kWh / 1,000 h
LLE 24x560mm 2400lm 835 HV ADV6	3,500 K	275 mA	C	13 kWh / 1,000 h
LLE 24x560mm 2400lm 840 HV ADV6	4,000 K	275 mA	B	13 kWh / 1,000 h
LLE 24x560mm 2400lm 840 HV ADV6 BT	4,000 K	275 mA	B	13 kWh / 1,000 h
LLE 24x560mm 2400lm 850 HV ADV6	5,000 K	275 mA	B	13 kWh / 1,000 h
LLE 24x560mm 2400lm 865 HV ADV6	6,500 K	275 mA	B	13 kWh / 1,000 h

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

2. Thermal details

2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For LLE a tp temperature of 50 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-40 ... +80 °C
---------------------	----------------

Operation only in non condensing environment.

Humidity during processing of the module should be between 30 to 70 %.

2.3 Heat sink values

LLE 24x70mm 325lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	275 mA	33.97 K/W	20 cm ²
25 °C	50 °C	700 mA	8.46 K/W	79 cm ²
35 °C	50 °C	275 mA	19.24 K/W	35 cm ²
35 °C	50 °C	700 mA	3.93 K/W	169 cm ²
40 °C	50 °C	275 mA	11.87 K/W	56 cm ²
40 °C	50 °C	700 mA	1.67 K/W	399 cm ²
45 °C	50 °C	275 mA	4.51 K/W	148 cm ²
45 °C	50 °C	700 mA	–	–

LLE 24x140mm 650lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	275 mA	16.98 K/W	39 cm ²
25 °C	50 °C	700 mA	4.23 K/W	158 cm ²
35 °C	50 °C	275 mA	9.62 K/W	69 cm ²
35 °C	50 °C	700 mA	1.97 K/W	339 cm ²
40 °C	50 °C	275 mA	5.94 K/W	112 cm ²
40 °C	50 °C	700 mA	0.84 K/W	798 cm ²
45 °C	50 °C	275 mA	2.25 K/W	296 cm ²
45 °C	50 °C	700 mA	–	–

LLE 24x280mm 1250lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	275 mA	8.49 K/W	79 cm ²
25 °C	50 °C	700 mA	2.12 K/W	315 cm ²
35 °C	50 °C	275 mA	4.81 K/W	139 cm ²
35 °C	50 °C	700 mA	0.98 K/W	678 cm ²
40 °C	50 °C	275 mA	2.97 K/W	225 cm ²
40 °C	50 °C	700 mA	0.42 K/W	1,596 cm ²
45 °C	50 °C	275 mA	1.13 K/W	592 cm ²
45 °C	50 °C	700 mA	–	–

LLE 24x560mm 2400lm ADV6

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	275 mA	4.25 K/W	157 cm ²
25 °C	50 °C	700 mA	1.06 K/W	630 cm ²
35 °C	50 °C	275 mA	2.40 K/W	277 cm ²
35 °C	50 °C	700 mA	0.49 K/W	1,356 cm ²
40 °C	50 °C	275 mA	1.48 K/W	449 cm ²
40 °C	50 °C	700 mA	0.21 K/W	3,192 cm ²
45 °C	50 °C	275 mA	0.56 K/W	1,183 cm ²
45 °C	50 °C	700 mA	–	–

Notes

The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. Depending on the heat sink a heat conducting paste or heat conducting film might be necessary to keep the specified tp temperature.

For applications with a small distance between LED module and lens, screw mounting is recommended to ensure a reliable thermal connection between LED module and cooling surface.

3. Installation / wiring

3.1 Electrical supply/choice of LED driver

LLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED driver from Tridonic in combination with LLE modules guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection



LLE modules must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module.

Wrong polarity can damage the LLE.

The LLE module is designed for serial wiring.

With parallel wiring tolerance-related differences in output are possible (thermal stress of the module) and can cause differences in brightness.

If a wire breaks or a complete module fails then the current passing through the other module increases. This may reduce its life considerably.

Max. 8 pieces 280 mm modules or 4 pieces 560 mm modules may be connected in parallel.


The max. permissible output current of the LED driver for parallel wiring is 1.8 A. For applications with a small distance between LED module and lens, an output current of 1.35 A must not be exceeded.

LLE can be operated either from SELV LED drivers or from LED drivers with LV output voltage.





LLE are basic insulated up to 440 V (if mounted with M4 screws with head diameter 7 mm) against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED driver (also against earth) is above 440 V, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction. At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.



3.2 Wiring



Wiring examples for serial wiring

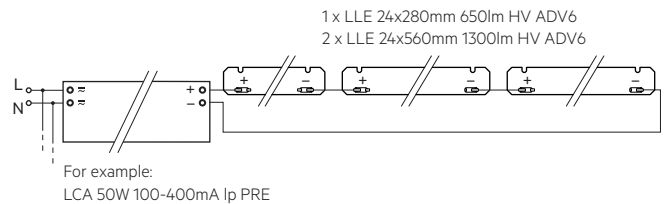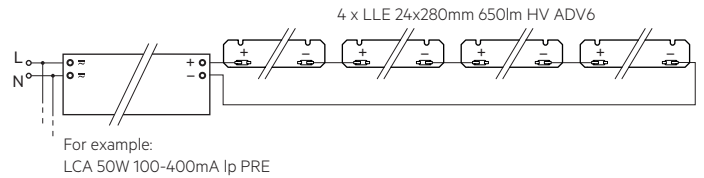


Wiring examples for parallel wiring

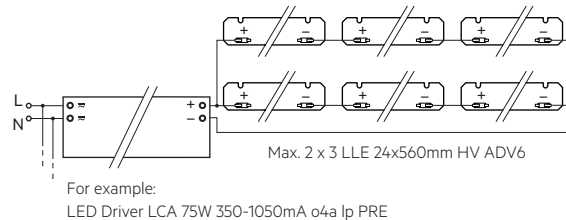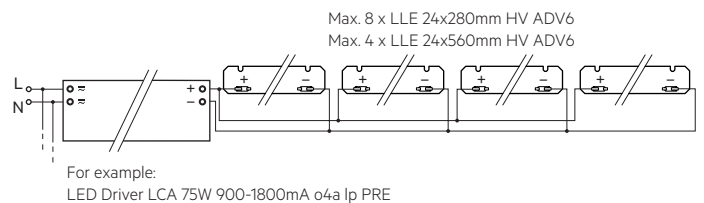

3.3 Wiring type and cross section

For wiring use stranded wire with ferrules or solid wire from 0.2 to 0.75 mm². For the push-wire connection you have to strip the insulation (8–9 mm).



To remove the wires use a suitable tool (e.g. Microcon release pin) or through twist and pull.

3.4 Mounting instruction




None of the components of the LLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted onto a heat sink with min. 3 screws per module or ACL CLIP 4.3mm.

The LLE 24x70mm module is delivered as a board of 280mm (4 pcs.) and must be separated.

Only touch the module at the edge to separate the modules (see marking below).

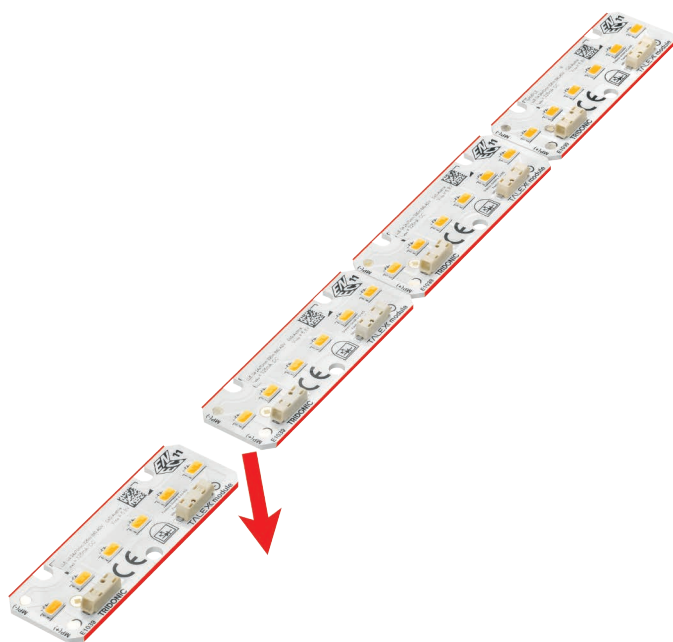

Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.


Avoid corrosive atmosphere during usage and storage.

3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

Cut out on gear tray for backside terminal:

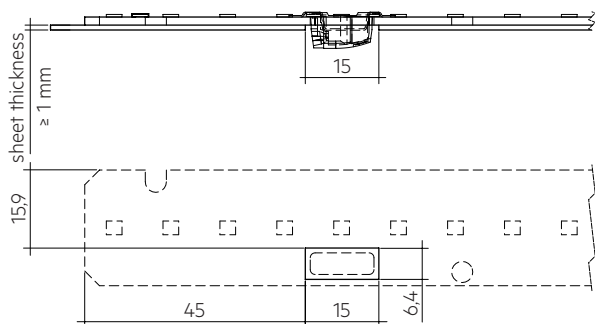

The distance between the terminal and the luminaire sheet must be at least 12 mm.

4. Lifetime

4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.
L70 means that the LED module will give 70 % of its initial luminous flux.
This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.

In addition the percentage of failed modules (fatal failure) is characterized by the C value.

4.2 Lumen maintenance for LLE 24mm HV ADV6

Forward current	tp tempera- ture	L90 / B10	L90 / B50	L80 / B10	L80 / B50	L70 / B10	L70 / B50
100 mA	40 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	50 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	60 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	70 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	80 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	85 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
275 mA	40 °C	61k h	>72k h	>72k h	>72k h	>72k h	>72k h
	50 °C	53k h	71k h	>72k h	>72k h	>72k h	>72k h
	60 °C	39k h	51k h	>72k h	>72k h	>72k h	>72k h
	70 °C	37k h	48k h	>72k h	>72k h	>72k h	>72k h
	80 °C	35k h	45k h	>72k h	>72k h	>72k h	>72k h
	85 °C	34kh	44k h	70k h	>72k h	>72k h	>72k h
700 mA	40 °C	48k h	62k h	>72k h	>72k h	>72k h	>72k h
	50 °C	45k h	59k h	>72k h	>72k h	>72k h	>72k h
	60 °C	42k h	55k h	>72k h	>72k h	>72k h	>72k h
	70 °C	40k h	52k h	>72k h	>72k h	>72k h	>72k h
	80 °C	37k h	49k h	>72k h	>72k h	>72k h	>72k h
	85 °C	36k h	47k h	>72k h	>72k h	>72k h	>72k h

L0C10 >72k h. At tp rated, based on 10 swichting cycles per day.

4.3 Switching capability

100,000 cycles

Tridonic test according to IEC 62717 Cl 10.3.3
30 s on / 30 s off at a forward current of 195 mA

5. Electrical values

5.1 Declaration of electrical parameters

I_{rated} ... Nominal operating current the module is designed for.


I_{max} ... Max. permissible continuous operating current incl. The tolerances of the LED driver.

Max. permissible LF current ripple ... Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.


Max. permissible peak current ... The max. output peak current of the LED driver must not exceed this value.

5.2 Typ. forward voltage vs. forward current


LLE 24x70mm 325lm 8xx HV ADV6

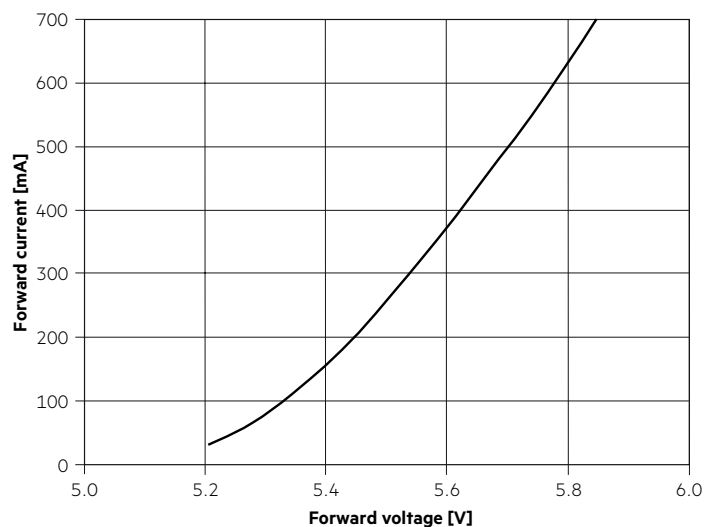


LLE 24x140mm 650lm 8xx HV ADV6

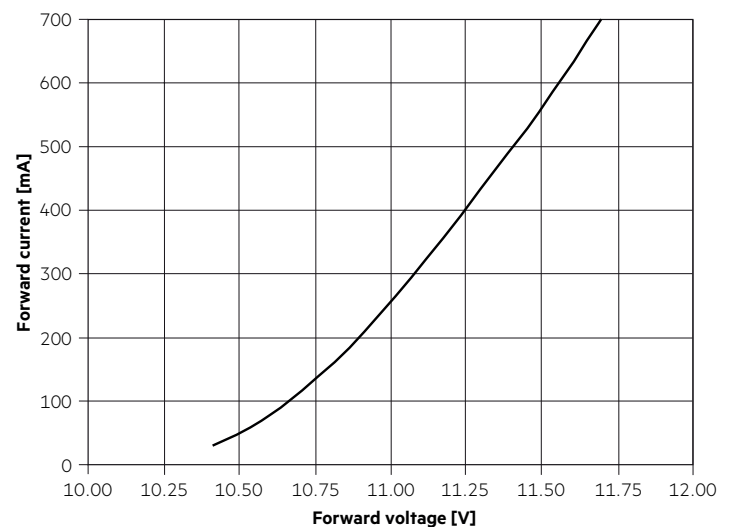

LLE 24x280mm 1250lm 8xx HV ADV6

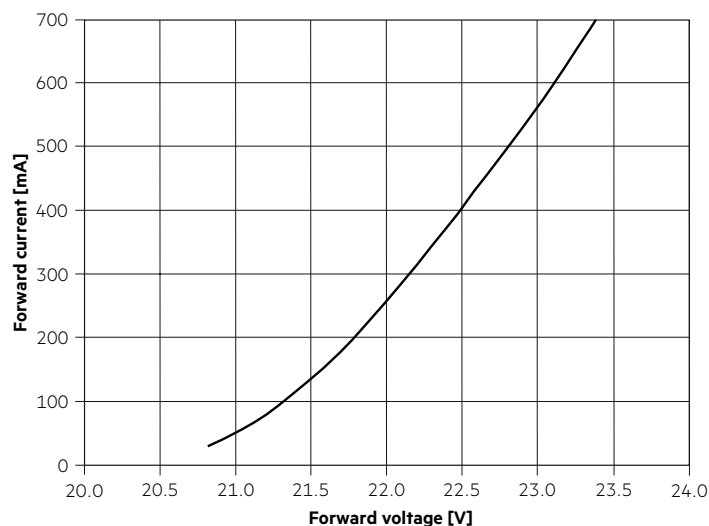


LLE 24x560mm 2400lm 8xx HV ADV6

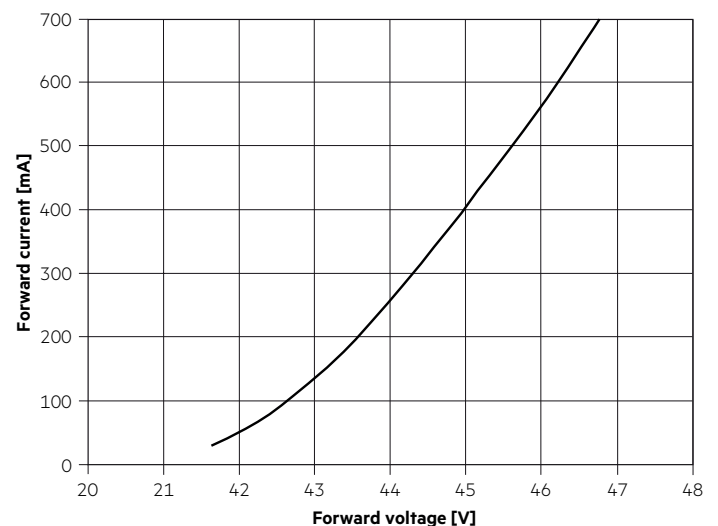

The diagrams are based on statistic values.
The real values can be different.

5.3 Forward voltage vs. t_c temperature

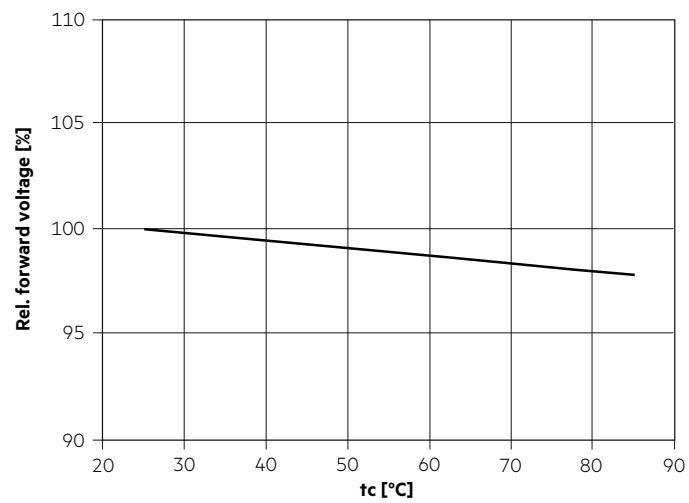

The diagrams are based on statistic values.
The real values can be different.

6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931



The specified colour coordinates are integral measured by current impulse of 195 mA and a duration of 100 ms.

The ambient temperature of the measurement is $t_a = 25^\circ\text{C}$.

The measurement tolerance of the colour coordinates are ± 0.01 .



2,700 K

	x0	y0
Centre	0.4578	0.4101

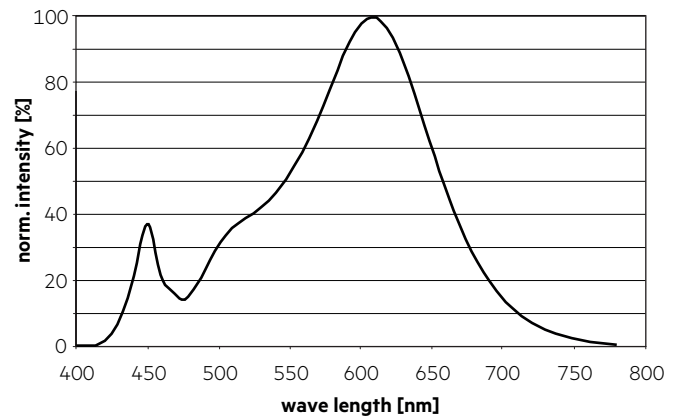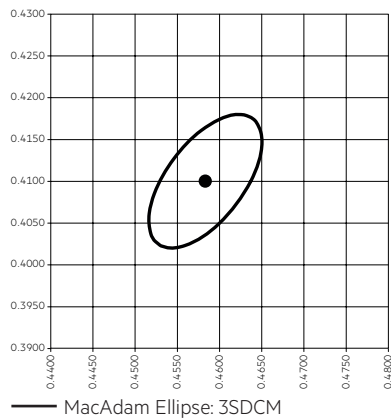



3,000 K

	x0	y0
Centre	0.4338	0.4030

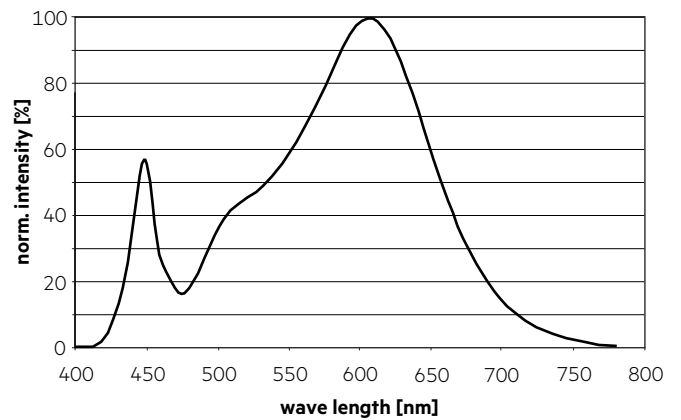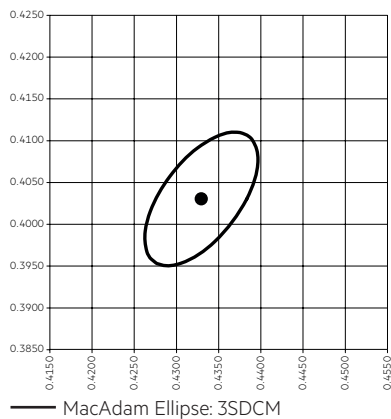


3,500 K

	x0	y0
Centre	0.4073	0.3917

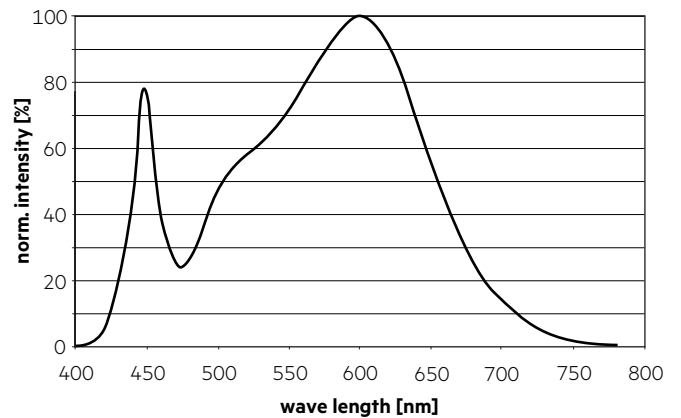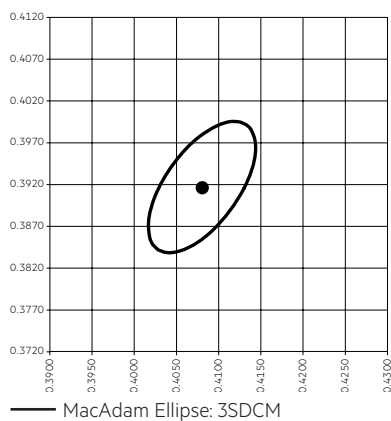


4,000 K

	x0	y0
Center	0.3818	0.3797

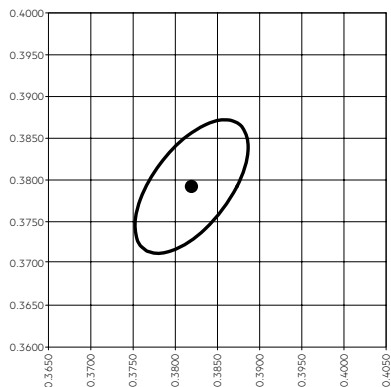


— MacAdam Ellipse: 3SDCM

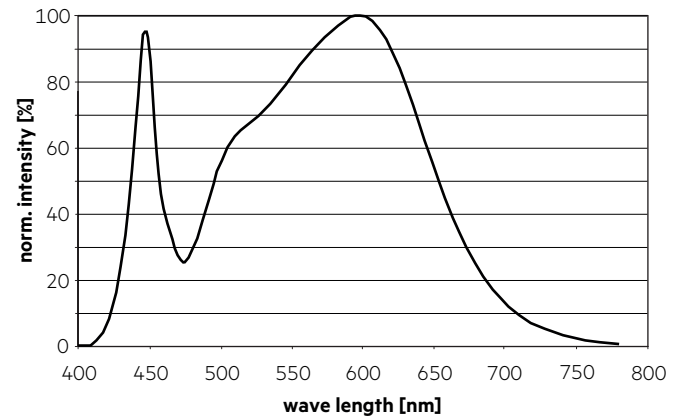


5,000 K

	x0	y0
Center	0.3447	0.3553

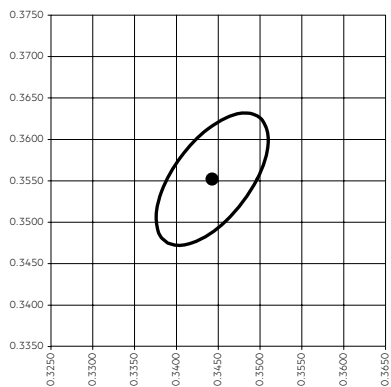


— MacAdam Ellipse: 3SDCM

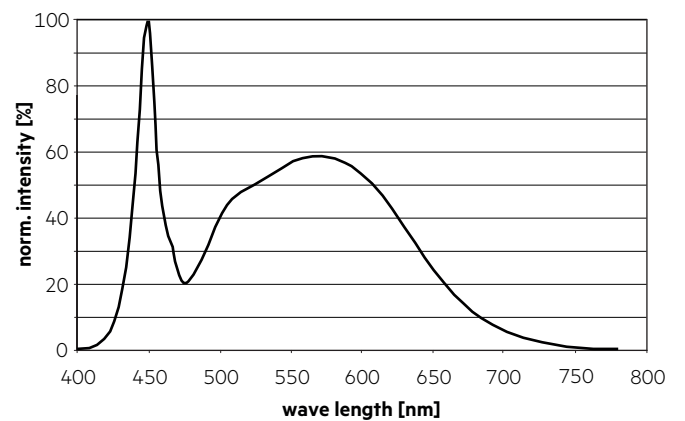


6,500 K

	x0	y0
Center	0.3123	0.3282

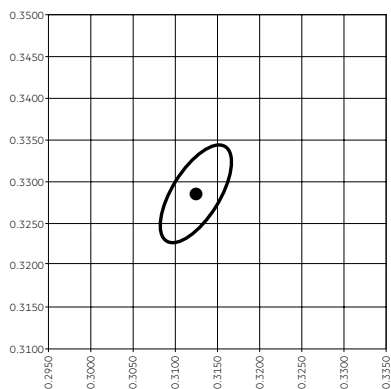


— MacAdam Ellipse: 3SDCM

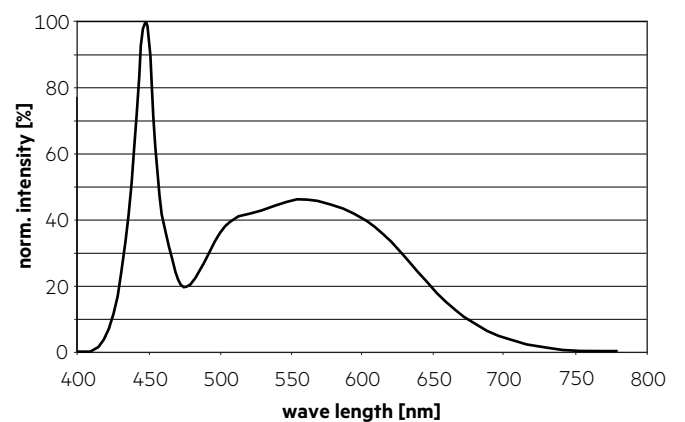


6.2 Light distribution

The optical design of the LLE product line ensures optimum homogeneity for the light distribution.

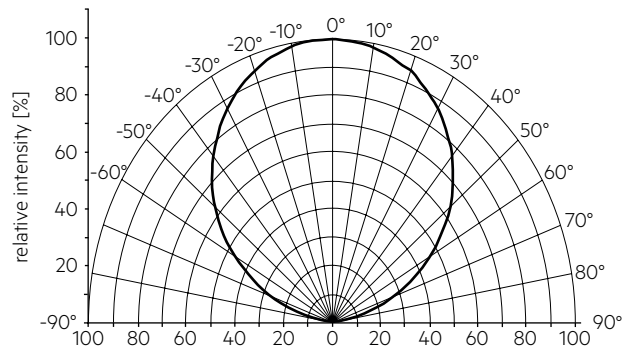


The colour temperature is measured integral over the complete module. The single LED light points can have deviations in the colour coordinates within MacAdam 5. To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 4 cm) should be used.

6.3 Relative luminous flux vs. tc temperature

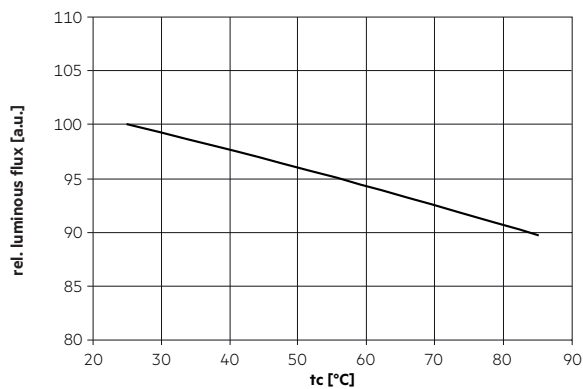

6.4 Relative luminous flux vs. operating current

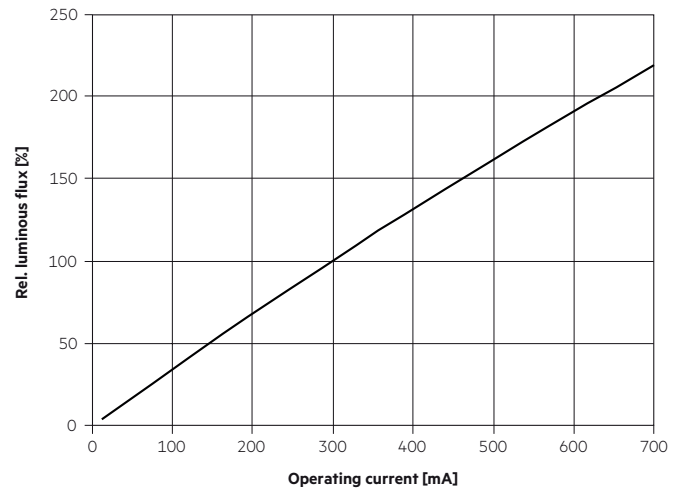

The diagrams are based on statistic values.
The real values can be different.

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

Guarantee conditions at www.tridonic.com → Services

Lifetime declarations are informative and represent no warranty claim.