


## LMI G2 48V 350–700mA 20–42V DIM Regular

Dimming

### Product description

- DALI dimmable
- Note: Due to PLC technology the LMI LED driver only works with Tridonic 48 V DC string LED drivers.  
Error-free operation with 48 V Drivers from other manufacturers is not guaranteed.
- Up to 93.5 % efficiency
- Output voltage range 20 – 42 V
- Adjustable output current between 350 and 700 mA
- Pure AM dimming down to 5 %
- Max. tc point temperature 105 °C
- 5 years guarantee (conditions at [www.tridonic.com](http://www.tridonic.com))

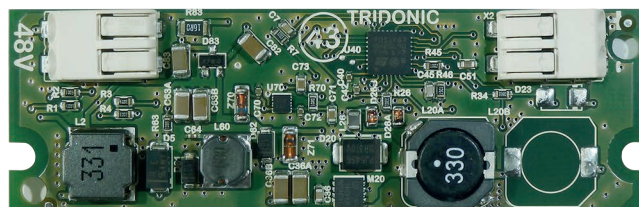

### Housing properties

- Pure PCB for built-in application
- Suitable for class III applications

### Interfaces

- DALI – DT 6
- Terminal blocks: 0° push terminals

### Functions

- Adjustable output current
- Protective features (overtemperature, short-circuit, no-load)

### Benefits

- Application-oriented operating window
- Small dimensions for miniaturization of luminaires
- No additional wires needed; DALI signals via the powerline



Standards, page 3




## LMI G2 48V 350–700mA 20–42V DIM Regular

Dimming

### Technical data

DC voltage input	48 V
DC voltage range	46 – 50 V
Mains frequency	0 Hz
Typ. current (full load) <sup>①</sup>	170 – 645 mA
Max. input power	31.4 W
Output power range (P <sub>rated</sub> )	7 – 29.4 W
Typ. efficiency (full load) <sup>① ②</sup>	93.5 %
Typ. input current in no-load operation	13.5 mA
Typ. input power in no-load operation	< 0.4 W
Time to light (full load)	< 0.6 s
Hold on time at power failure	< 5 ms
Output current tolerance <sup>①</sup>	± 3 %
Output current tolerance (at min. dimming level)	± 7.5 %
Max. peak output current	≤ output current + 30 %
Output LF current ripple	same as LF ripple on 48 V bus
Max. output voltage (no-load voltage)	48 V
Dimming range	5 – 100 %
ESD classification	Severity level 2
Max. tc point temperature	105 °C
Guarantee (conditions at www.tridonic.com)	5 years
Dimensions L x W x H	75 x 23.8 x 8.4 mm

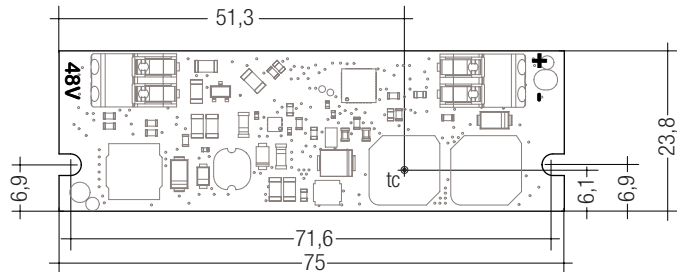

### Ordering data

Type	Article number	Packaging box	Packaging carton	Packaging pallet	Weight per pc.
<b>LMI G2 48V 350-700mA 20-42V DIM Regular</b>	<b>28001584</b>	5 pc(s).	50 pc(s).	3,000 pc(s).	0.016 kg

### Mandatory LCU DC power supply for operating LMI LED driver:

Type	Article number	Packaging carton	Packaging pallet	Weight per pc.
<b>LCU 48V 75W DC-STR DIM Ip</b>	<b>28000815</b>	10 pc(s).	760 pc(s).	0.280 kg
<b>LCU 48V 75W DC-STR DIM SR</b>	<b>28001233</b>	10 pc(s).	300 pc(s).	0.349 kg
<b>LCU 48V 150W DC-STR DIM Ip</b>	<b>28001235</b>	20 pc(s).	600 pc(s).	0.576 kg
<b>LCU 48V 150W DC-STR DIM SR</b>	<b>28001044</b>	10 pc(s).	300 pc(s).	0.369 kg

### Specific technical data

Type	Output current	Min. forward voltage	Max. forward voltage	Max. output power (at 48 V, full load)	Typ. power consumption (at 48 V, full load)	Typ. current consumption (at 48 V, full load)
<b>LMI G2 48V 350-700mA 20-42V DIM Regular</b>	350 mA	20 V	42 V	14.7 W	15.9 W	325 mA
	400 mA	20 V	42 V	16.8 W	18.0 W	369 mA
	450 mA	20 V	42 V	18.9 W	20.2 W	413 mA
	500 mA	20 V	42 V	21.0 W	22.4 W	457 mA
	550 mA	20 V	42 V	23.1 W	24.5 W	501 mA
	600 mA	20 V	42 V	25.2 W	26.7 W	546 mA
	650 mA	20 V	42 V	27.3 W	28.9 W	592 mA
	700 mA	20 V	42 V	29.4 W	31.4 W	644 mA

<sup>①</sup> Valid at 100 % dimming level.

<sup>②</sup> Depending on the selected output current.

## 1. Standards

EN 61347-1  
EN 61347-2-13  
EN 62384  
According to EN 62386-101  
According to EN 62386-102  
According to EN 62386-207


## 2. Thermal details and lifetime

### 2.1 Expected lifetime

Lifetime is limited by DC power supply.  
Max. tp point temperature must not be exceeded.

## 3. Installation / wiring


### 3.1 Circuit diagram

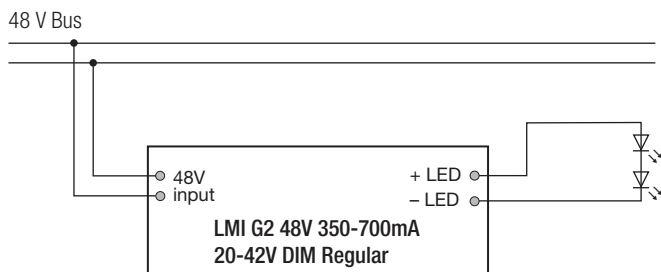

### 3.2 Wiring type and cross section

For wiring use stranded wire with ferrules or solid wire from 0.2 – 0.75 mm<sup>2</sup>. Strip 6 – 7 mm of insulation from the cables to ensure perfect operation of terminals.

LED module/LED driver/supply



### 3.3 Wiring guidelines

- Run the 48 V cables separately from the mains connections and mains cables to ensure good EMC conditions.
- Keep the 48 V DC output wiring as short as possible to ensure good EMC. Tridonic did successfully EMC test with more than 30 m on grounded metal housings.
- For plastic housing reduce the cable length if the EMC gets worse.
- The max. cable length, including track light, is limited only by voltage drop: Supply the last LMI 48V in the track light with minimum 46 V. More details in the voltage drop application note!
- Secondary switching is not permitted.
- To avoid the damage of the Driver protect the wiring against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).
- Additional systems or lines can compromise or disrupt the PLC communication in the DC string system. Therefore do not install any other systems or cables parallel to the DC string system cables.

### 3.4 LED module hot plug-in

Hot plug-in is not supported due to residual output voltage of > 0 V. The LED driver could may be damaged and there is a risk of destroying the LED module.

### 3.5 EOS/ESD safety guidelines




The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice.


For further information for EOS/ESD safety guidelines and the ESD classification please refer to the brochure entitled <http://www.tridonic.com/esd-protection>.

## 4. Electrical values

### 4.1 Operating window

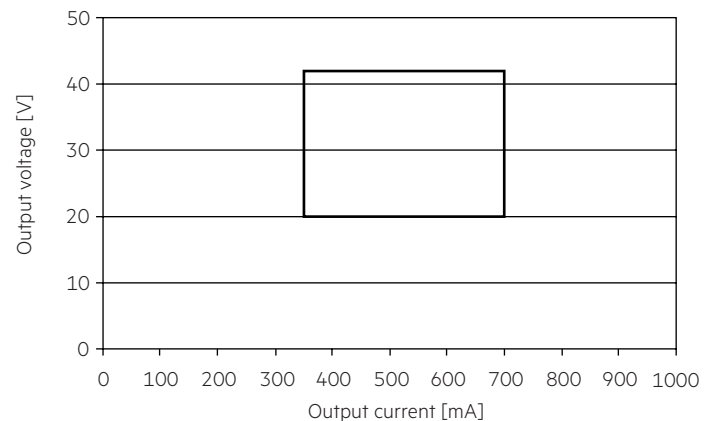

### 4.2 Efficiency vs load

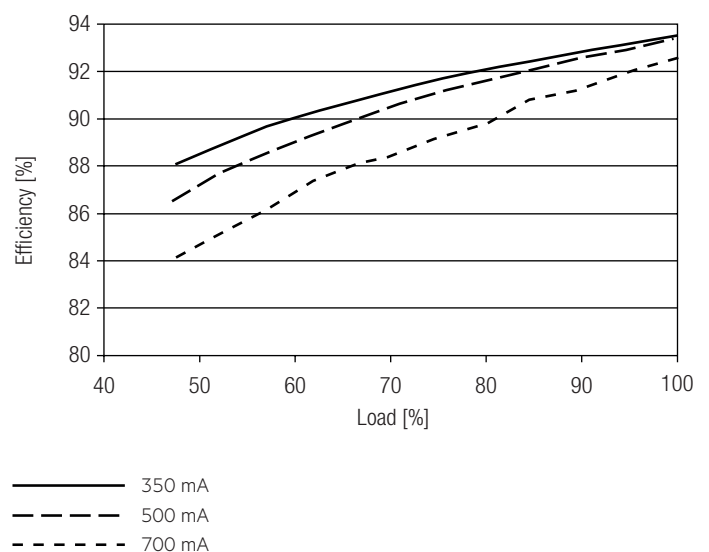

100 % load corresponds to the max. output power (full load) according to the table on page 2.

### 4.3 Dimming

Dimming range 5 to 100 % of nominal current

Digital control with:

Programmable parameter:

Minimum dimming level

Maximum dimming level

Default minimum = depending on nominal current level


Default maximum = 100 %

Dimming curve is adapted to the eye sensitiveness.

Dimming is realized by amplitude dimming.

### 4.4 Dimming characteristics

Digital dimming value

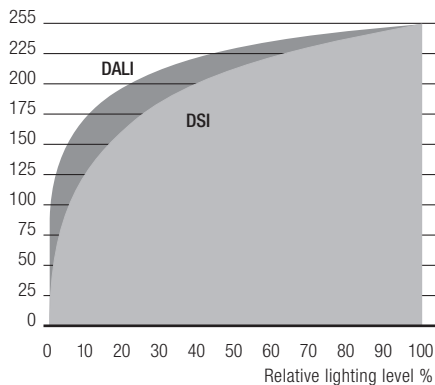

Dimming characteristics as seen by the human eye

## 5. Interfaces / communication

### 5.1 Control input

The device is controlled via LCU DC power supply.

### 5.2 switchDIM

The device is controlled via LCU DC power supply.

### 5.3 Short-circuit behaviour

The LED driver will not be damaged. In case of a short-circuit at the LED output the LED output is switched off. As soon as the short circuit removed the device has to be restarted via mains on / off DC power supply or DALI on / off command.

### 5.4 No-load operation

The LED driver will not be damaged in no-load operation. The output will be deactivated and is therefore free of voltage (after a short period of time). As soon as the LED is connected the device has to be restarted via mains on / off DC power supply or DALI on / off command.

### 5.5 Overload protection

If the output voltage range is exceeded the LED driver turns off the LED output. After restart of the DC power supply or DALI on / off the LED driver output will be activated again.

### 5.6 Overtemperature protection

The LED driver is protected against temporary thermal overheating. If the temperature limit is exceeded the LED driver will turn off and after cool down phase automatically restart. The temperature protection is activated approx. +5 °C above  $t_{c\ max}$  (see page 2).

## 6. Functions

### 6.1 Storage of programmed parameters

The programming is only saved after a restart of the device.

For immediate storage, a manual DALI save command must be send.

### 6.2 Adjustable current

The output current of the LED driver can be adjusted in a certain range.

Adjustment is done by masterCONFIGURATOR at DC power supply (see masterCONFIGURATOR documentation).

## 7. Miscellaneous

### 7.1 Conditions of use and storage

Humidity: 5 % up to max. 85 %, not condensed (max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The LED drivers have to be acclimatised to the specified temperature range (ta range of DC power supply) before they can be operated.

The LED driver is declared as inbuilt LED controlgear, meaning it is intended to be used within a luminaire enclosure.

If the product is used outside a luminaire, the installation must provide suitable protection for people and environment (e.g. in illuminated ceilings).

### 7.2 Additional information

Additional technical information at [www.tridonic.com](http://www.tridonic.com) → Technical Data

Lifetime declarations are informative and represent no warranty claim. No warranty if device was opened.