



Module SLE ADV8 CRI90

Modules SLE advanced

Product description

- For spotlights and downlights
- TIM variants for easy and fast assembly
- For operating with SELV Driver
- Excellent thermal management by COB technology
- Uniform radiation with Dam&Fill technology
- Built-in LED module
- Cooling required
- Flexible operating modes
- 4,000 K CRI90 module COI approved acc. to AS/NZS1680.2.5:1997
- Long lifetime: 60,000 hours
- 5 years guarantee (conditions at www.tridonic.com)

Optical properties

- Colour temperatures 2,700 K, 3,000 K, 3,500 K and 4,000 K
- Useful luminous flux 4,816 lm at Irated and tp = 25 °C
- Efficacy of the LED module 159 lm/W at Irated and tp = 25 °C
- High colour rendering index CRI > 90
- Small colour tolerance MacAdam 3

Mechanical properties

- Module dimension LES04, LES06, LES09, LES13, LES15, LES17 and LES21
- Housing with Snap-On feature for easy reflector mounting
- 50 mm housing with 35 mm mounting hole distance acc. to Zhaga
- Fixing holes for M3 screws

System solution

- Combine Tridonic`s LED modules and dimmable drivers to achieve an outstanding system efficacy (configuration possible via <https://setbuilder.tridonic.com/>)



Standards, page 16

Colour temperatures and tolerances, page 28



LES17 with housing




LES21 with housing



LES04



LES06



LES13



LES17






Module SLE ADV8 CRI90

Modules SLE advanced


Technical data

Colour consistency [®]	3 SDCM
ESD classification	severity level 4
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Lumen maintenance L70B50	60,000 h
Guarantee	5 year(s)


[®] Integral measurement over the complete module.

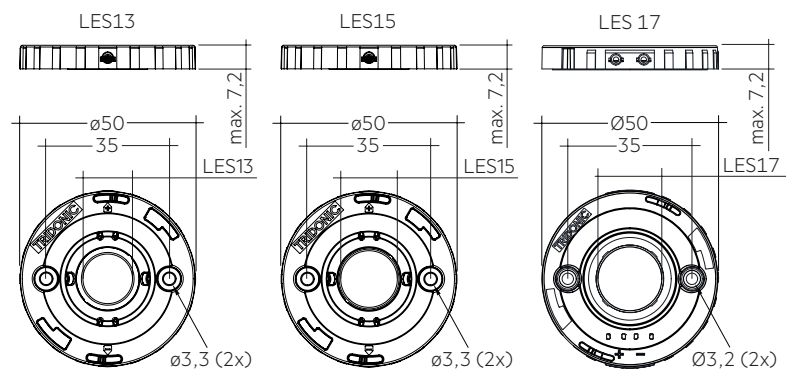


Dimensions in mm, *optical LES

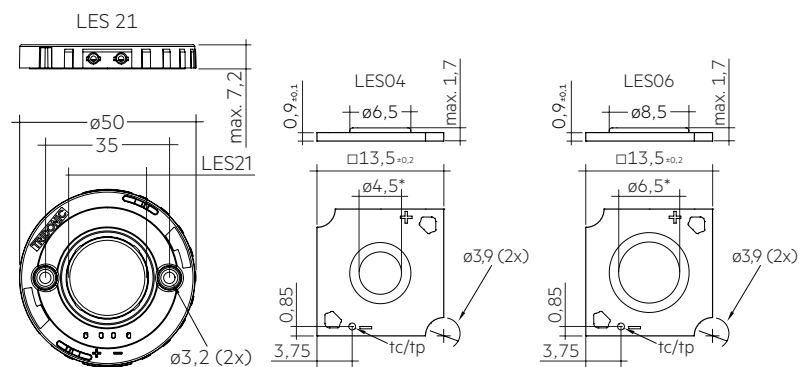

Dimensions in mm, *optical LES

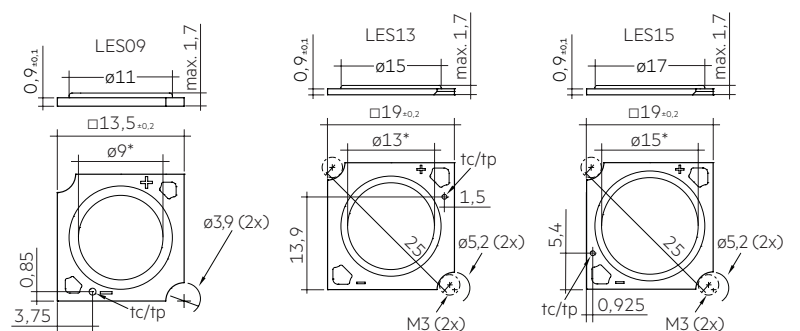

Dimensions in mm, *optical LES

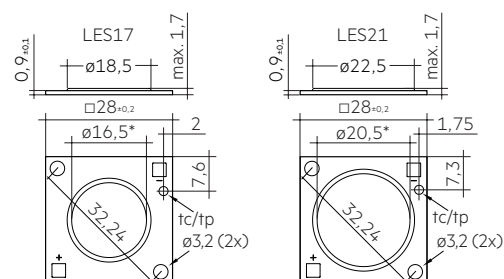

Dimensions in mm, *optical LES

Module SLE ADV8 CRI90

Modules SLE advanced

Ordering data

Type	Article number	Packaging	Weight per pc.
SLE 04mm 800lm 930 R ADV8	28004539	20 pc(s).	0.001 kg
SLE 04mm 800lm 940 R ADV8	28004540	20 pc(s).	0.001 kg
SLE 06mm 1600lm 930 R ADV8	28004541	20 pc(s).	0.001 kg
SLE 06mm 1600lm 940 R ADV8	28004542	20 pc(s).	0.001 kg
SLE 09mm 800lm 930 R ADV8	28004545	20 pc(s).	0.001 kg
SLE 09mm 800lm 935 R ADV8	28004546	20 pc(s).	0.001 kg
SLE 09mm 800lm 940 R ADV8	28004547	20 pc(s).	0.001 kg
SLE 09mm 1200lm 927 R ADV8	28004551	20 pc(s).	0.001 kg
SLE 09mm 1200lm 930 R ADV8	28004552	20 pc(s).	0.001 kg
SLE 09mm 1200lm 940 R ADV8	28004553	20 pc(s).	0.001 kg
SLE 09mm 2600lm 927 R ADV8	28004558	20 pc(s).	0.001 kg
SLE 09mm 2600lm 930 R ADV8	28004559	20 pc(s).	0.001 kg
SLE 09mm 2600lm 935 R ADV8	28004560	20 pc(s).	0.001 kg
SLE 09mm 2600lm 940 R ADV8	28004561	20 pc(s).	0.001 kg
SLE 13mm 3000lm 927 R ADV8	28004566	20 pc(s).	0.001 kg
SLE 13mm 3000lm 930 R ADV8	28004567	20 pc(s).	0.001 kg
SLE 13mm 3000lm 935 R ADV8	28004568	20 pc(s).	0.001 kg
SLE 13mm 3000lm 940 R ADV8	28004569	20 pc(s).	0.001 kg
SLE 13mm 3000lm 927 H ADV8	28004626	20 pc(s).	0.001 kg
SLE 13mm 3000lm 930 H ADV8	28004572	20 pc(s).	0.001 kg
SLE 13mm 3000lm 935 H ADV8	28004627	20 pc(s).	0.001 kg
SLE 13mm 3000lm 940 H ADV8	28004573	20 pc(s).	0.001 kg
SLE 15mm 4000lm 927 R ADV8	28004531	10 pc(s).	0.002 kg
SLE 15mm 4000lm 930 R ADV8	28004532	10 pc(s).	0.002 kg
SLE 15mm 4000lm 935 R ADV8	28004533	10 pc(s).	0.002 kg
SLE 15mm 4000lm 940 R ADV8	28004534	10 pc(s).	0.002 kg
SLE 15mm 4000lm 930 H ADV8	28004521	10 pc(s).	0.002 kg
SLE 15mm 4000lm 940 H ADV8	28004522	10 pc(s).	0.002 kg
SLE 15mm 4000lm 930 H ADV8 T	28004525	10 pc(s).	0.002 kg
SLE 15mm 4000lm 940 H ADV8 T	28004526	10 pc(s).	0.002 kg
SLE 17mm 5000lm 927 R ADV8	28004591	5 pc(s).	0.001 kg
SLE 17mm 5000lm 930 R ADV8	28004592	5 pc(s).	0.001 kg
SLE 17mm 5000lm 935 R ADV8	28004593	5 pc(s).	0.001 kg
SLE 17mm 5000lm 940 R ADV8	28004594	5 pc(s).	0.001 kg
SLE 17mm 5000lm 927 H ADV8	28004578	5 pc(s).	0.001 kg
SLE 17mm 5000lm 930 H ADV8	28004579	5 pc(s).	0.001 kg
SLE 17mm 5000lm 935 H ADV8	28004580	5 pc(s).	0.002 kg
SLE 17mm 5000lm 940 H ADV8	28004581	5 pc(s).	0.002 kg
SLE 17mm 5000lm 930 H ADV8 T	28004584	5 pc(s).	0.002 kg
SLE 17mm 5000lm 935 H ADV8 T	28004585	5 pc(s).	0.002 kg
SLE 17mm 5000lm 940 H ADV8 T	28004586	5 pc(s).	0.002 kg
SLE 21mm 6000lm 927 R ADV8	28004612	5 pc(s).	0.002 kg
SLE 21mm 6000lm 930 R ADV8	28004613	5 pc(s).	0.002 kg
SLE 21mm 6000lm 935 R ADV8	28004614	5 pc(s).	0.002 kg
SLE 21mm 6000lm 940 R ADV8	28004615	5 pc(s).	0.001 kg
SLE 21mm 6000lm 927 H ADV8	28004598	5 pc(s).	0.001 kg
SLE 21mm 6000lm 930 H ADV8	28004599	5 pc(s).	0.003 kg
SLE 21mm 6000lm 935 H ADV8	28004600	5 pc(s).	0.003 kg
SLE 21mm 6000lm 940 H ADV8	28004601	5 pc(s).	0.003 kg
SLE 21mm 6000lm 930 H ADV8 T	28004604	5 pc(s).	0.003 kg
SLE 21mm 6000lm 940 H ADV8 T	28004605	5 pc(s).	0.003 kg

Photometric data

Type ^①	Colour temperature	Photometric Code ^②	Useful luminous flux at tp = 25 °C ^③	Luminous flux at tp rated ^④			Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Beam characteristic	Colour rendering index CRI
				Min.	Typ.	Max.				
SLE 04mm 800lm – Operating mode HE at 150 mA										
SLE 04mm 800lm 930 R ADV8	3,000 K	930/359	–	578 lm	642 lm	706 lm	–	125 lm/W	360°	>90
SLE 04mm 800lm 940 R ADV8	4,000 K	940/359	–	627 lm	696 lm	766 lm	–	136 lm/W	360°	>90
SLE 04mm 800lm – Operating mode NM at 180 mA										
SLE 04mm 800lm 930 R ADV8	3,000 K	930/359	795 lm	663 lm	736 lm	810 lm	124 lm/W	117 lm/W	360°	>90
SLE 04mm 800lm 940 R ADV8	4,000 K	940/359	862 lm	719 lm	799 lm	879 lm	135 lm/W	127 lm/W	360°	>90
SLE 04mm 800lm – Operating mode HO at 200 mA										
SLE 04mm 800lm 930 R ADV8	3,000 K	930/359	–	749 lm	832 lm	915 lm	–	118 lm/W	360°	>90
SLE 04mm 800lm 940 R ADV8	4,000 K	940/359	–	804 lm	894 lm	983 lm	–	127 lm/W	360°	>90
SLE 06mm 1600lm – Operating mode HE at 180 mA										
SLE 06mm 1600lm 930 R ADV8	3,000 K	930/359	–	731 lm	812 lm	893 lm	–	137 lm/W	360°	>90
SLE 06mm 1600lm 940 R ADV8	4,000 K	940/359	–	776 lm	863 lm	949 lm	–	145 lm/W	360°	>90
SLE 06mm 1600lm – Operating mode NM at 300 mA										
SLE 06mm 1600lm 930 R ADV8	3,000 K	930/359	1,418 lm	1,188 lm	1,320 lm	1,452 lm	136 lm/W	128 lm/W	360°	>90
SLE 06mm 1600lm 940 R ADV8	4,000 K	940/359	1,464 lm	1,221 lm	1,357 lm	1,492 lm	139 lm/W	131 lm/W	360°	>90
SLE 06mm 1600lm – Operating mode HO at 400 mA										
SLE 06mm 1600lm 930 R ADV8	3,000 K	930/359	–	1,509 lm	1,677 lm	1,845 lm	–	119 lm/W	360°	>90
SLE 06mm 1600lm 940 R ADV8	4,000 K	940/359	–	1,608 lm	1,787 lm	1,966 lm	–	127 lm/W	360°	>90
SLE 09mm 800lm – Operating mode HE at 250 mA										
SLE 09mm 800lm 930 R ADV8	3,000 K	930/359	–	1,010 lm	1,122 lm	1,235 lm	–	133 lm/W	360°	>90
SLE 09mm 800lm 935 R ADV8	3,500 K	935/359	–	1,060 lm	1,177 lm	1,295 lm	–	139 lm/W	360°	>90
SLE 09mm 800lm 940 R ADV8	4,000 K	940/359	–	1,096 lm	1,218 lm	1,340 lm	–	144 lm/W	360°	>90
SLE 09mm 800lm – Operating mode NM at 350 mA										
SLE 09mm 800lm 930 R ADV8	3,000 K	930/359	1,658 lm	1,372 lm	1,525 lm	1,677 lm	133 lm/W	124 lm/W	360°	>90
SLE 09mm 800lm 935 R ADV8	3,500 K	935/359	1,688 lm	1,398 lm	1,553 lm	1,709 lm	135 lm/W	127 lm/W	360°	>90
SLE 09mm 800lm 940 R ADV8	4,000 K	940/359	1,703 lm	1,410 lm	1,567 lm	1,723 lm	137 lm/W	128 lm/W	360°	>90
SLE 09mm 800lm – Operating mode HO at 450 mA										
SLE 09mm 800lm 930 R ADV8	3,000 K	930/359	–	1,734 lm	1,927 lm	2,119 lm	–	119 lm/W	360°	>90
SLE 09mm 800lm 935 R ADV8	3,500 K	935/359	–	1,818 lm	2,020 lm	2,222 lm	–	125 lm/W	360°	>90
SLE 09mm 800lm 940 R ADV8	4,000 K	940/359	–	1,875 lm	2,083 lm	2,292 lm	–	129 lm/W	360°	>90
SLE 09mm 1200lm – Operating mode HE at 250 mA										
SLE 09mm 1200lm 927 R ADV8	2,700 K	927/359	–	991 lm	1,101 lm	1,211 lm	–	134 lm/W	360°	>90
SLE 09mm 1200lm 930 R ADV8	3,000 K	930/359	–	1,036 lm	1,151 lm	1,266 lm	–	140 lm/W	360°	>90
SLE 09mm 1200lm 940 R ADV8	4,000 K	940/359	–	1,097 lm	1,219 lm	1,341 lm	–	148 lm/W	360°	>90
SLE 09mm 1200lm – Operating mode NM at 350 mA										
SLE 09mm 1200lm 927 R ADV8	2,700 K	927/359	1,605 lm	1,338 lm	1,486 lm	1,635 lm	135 lm/W	126 lm/W	360°	>90
SLE 09mm 1200lm 930 R ADV8	3,000 K	930/359	1,660 lm	1,383 lm	1,536 lm	1,690 lm	139 lm/W	131 lm/W	360°	>90
SLE 09mm 1200lm 940 R ADV8	4,000 K	940/359	1,776 lm	1,480 lm	1,644 lm	1,809 lm	149 lm/W	140 lm/W	360°	>90
SLE 09mm 1200lm – Operating mode HO at 500 mA										
SLE 09mm 1200lm 927 R ADV8	2,700 K	927/359	–	1,882 lm	2,091 lm	2,301 lm	–	121 lm/W	360°	>90
SLE 09mm 1200lm 930 R ADV8	3,000 K	930/359	–	1,950 lm	2,167 lm	2,383 lm	–	125 lm/W	360°	>90
SLE 09mm 1200lm 940 R ADV8	4,000 K	940/359	–	2,074 lm	2,304 lm	2,534 lm	–	133 lm/W	360°	>90

^① HE ... high efficiency, NM ... nominal mode, HO ... high output.

^② The detailed explanation, see data sheet section 1.1.

^③ Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

^④ Measurement uncertainty ± 10 %. Based on calculation.

Photometric data

Type ^①	Colour	Photometric	Useful luminous flux at tp = 25 °C ^③	Luminous flux at tp rated ^④			Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Beam characteristic	Colour rendering index CRI
	temperature	Code ^②		Min.	Typ.	Max.				
SLE 09mm 2600lm – Operating mode HE at 450 mA										
SLE 09mm 2600lm 927 R ADV8	2,700 K	927/359	–	1,704 lm	1,894 lm	2,083 lm	–	125 lm/W	360°	>90
SLE 09mm 2600lm 930 R ADV8	3,000 K	930/359	–	1,805 lm	2,005 lm	2,206 lm	–	133 lm/W	360°	>90
SLE 09mm 2600lm 935 R ADV8	3,500 K	935/359	–	1,852 lm	2,058 lm	2,264 lm	–	136 lm/W	360°	>90
SLE 09mm 2600lm 940 R ADV8	4,000 K	940/359	–	1,903 lm	2,114 lm	2,325 lm	–	140 lm/W	360°	>90
SLE 09mm 2600lm – Operating mode NM at 600 mA										
SLE 09mm 2600lm 927 R ADV8	2,700 K	927/359	2,646 lm	2,195 lm	2,439 lm	2,683 lm	126 lm/W	118 lm/W	360°	>90
SLE 09mm 2600lm 930 R ADV8	3,000 K	930/359	2,744 lm	2,272 lm	2,524 lm	2,777 lm	131 lm/W	122 lm/W	360°	>90
SLE 09mm 2600lm 935 R ADV8	3,500 K	935/359	2,872 lm	2,378 lm	2,642 lm	2,906 lm	137 lm/W	128 lm/W	360°	>90
SLE 09mm 2600lm 940 R ADV8	4,000 K	940/359	2,899 lm	2,400 lm	2,667 lm	2,933 lm	138 lm/W	129 lm/W	360°	>90
SLE 09mm 2600lm – Operating mode HO at 800 mA										
SLE 09mm 2600lm 927 R ADV8	2,700 K	927/359	–	2,886 lm	3,207 lm	3,527 lm	–	113 lm/W	360°	>90
SLE 09mm 2600lm 930 R ADV8	3,000 K	930/359	–	3,072 lm	3,413 lm	3,754 lm	–	121 lm/W	360°	>90
SLE 09mm 2600lm 935 R ADV8	3,500 K	935/359	–	3,150 lm	3,500 lm	3,851 lm	–	124 lm/W	360°	>90
SLE 09mm 2600lm 940 R ADV8	4,000 K	940/359	–	3,238 lm	3,598 lm	3,958 lm	–	127 lm/W	360°	>90

^① HE ... high efficiency, NM ... nominal mode, HO ... high output.

^② The detailed explanation, see data sheet section 1.1.

^③ Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

^④ Measurement uncertainty ± 10 %. Based on calculation.

Photometric data

Type ^①	Colour	Photometric	Useful luminous flux at tp = 25 °C ^③	Luminous flux at tp rated ^④			Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Beam characteristic	Colour rendering index CRI
	temperature	Code ^②		Min.	Typ.	Max.				
SLE 13mm 3000lm – Operating mode HE at 350 mA										
SLE 13mm 3000lm 927 R ADV8	2,700 K	927/359	–	1,440 lm	1,600 lm	1,760 lm	–	140 lm/W	360°	>90
SLE 13mm 3000lm 930 R ADV8	3,000 K	930/359	–	1,486 lm	1,651 lm	1,816 lm	–	144 lm/W	360°	>90
SLE 13mm 3000lm 935 R ADV8	3,500 K	935/359	–	1,546 lm	1,718 lm	1,890 lm	–	150 lm/W	360°	>90
SLE 13mm 3000lm 940 R ADV8	4,000 K	940/359	–	1,590 lm	1,767 lm	1,944 lm	–	155 lm/W	360°	>90
SLE 13mm 3000lm 927 H ADV8	2,700 K	927/359	–	1,440 lm	1,600 lm	1,760 lm	–	140 lm/W	117°	>90
SLE 13mm 3000lm 930 H ADV8	3,000 K	930/359	–	1,486 lm	1,651 lm	1,816 lm	–	144 lm/W	117°	>90
SLE 13mm 3000lm 935 H ADV8	3,500 K	935/359	–	1,546 lm	1,718 lm	1,890 lm	–	150 lm/W	117°	>90
SLE 13mm 3000lm 940 H ADV8	4,000 K	940/359	–	1,590 lm	1,767 lm	1,944 lm	–	155 lm/W	117°	>90
SLE 13mm 3000lm – Operating mode NM at 500 mA										
SLE 13mm 3000lm 927 R ADV8	2,700 K	927/359	2,374 lm	1,983 lm	2,203 lm	2,424 lm	142 lm/W	133 lm/W	360°	>90
SLE 13mm 3000lm 930 R ADV8	3,000 K	930/359	2,471 lm	2,064 lm	2,293 lm	2,522 lm	147 lm/W	139 lm/W	360°	>90
SLE 13mm 3000lm 935 R ADV8	3,500 K	935/359	2,578 lm	2,153 lm	2,392 lm	2,631 lm	154 lm/W	145 lm/W	360°	>90
SLE 13mm 3000lm 940 R ADV8	4,000 K	940/359	2,658 lm	2,252 lm	2,502 lm	2,752 lm	161 lm/W	151 lm/W	360°	>90
SLE 13mm 3000lm 927 H ADV8	2,700 K	927/359	1,978 lm	1,983 lm	2,203 lm	2,424 lm	142 lm/W	133 lm/W	117°	>90
SLE 13mm 3000lm 930 H ADV8	3,000 K	930/359	2,058 lm	2,064 lm	2,293 lm	2,522 lm	147 lm/W	139 lm/W	117°	>90
SLE 13mm 3000lm 935 H ADV8	3,500 K	935/359	2,147 lm	2,153 lm	2,392 lm	2,631 lm	154 lm/W	145 lm/W	117°	>90
SLE 13mm 3000lm 940 H ADV8	4,000 K	940/359	2,214 lm	2,252 lm	2,502 lm	2,752 lm	161 lm/W	151 lm/W	117°	>90
SLE 13mm 3000lm – Operating mode HO at 900 mA										
SLE 13mm 3000lm 927 R ADV8	2,700 K	927/359	–	3,449 lm	3,832 lm	4,215 lm	–	122 lm/W	360°	>90
SLE 13mm 3000lm 930 R ADV8	3,000 K	930/359	–	3,550 lm	3,944 lm	4,339 lm	–	125 lm/W	360°	>90
SLE 13mm 3000lm 935 R ADV8	3,500 K	935/359	–	3,698 lm	4,109 lm	4,520 lm	–	130 lm/W	360°	>90
SLE 13mm 3000lm 940 R ADV8	4,000 K	940/359	–	3,782 lm	4,203 lm	4,623 lm	–	133 lm/W	360°	>90
SLE 13mm 3000lm 927 H ADV8	2,700 K	927/359	–	3,449 lm	3,832 lm	4,215 lm	–	122 lm/W	117°	>90
SLE 13mm 3000lm 930 H ADV8	3,000 K	930/359	–	3,550 lm	3,944 lm	4,339 lm	–	125 lm/W	117°	>90
SLE 13mm 3000lm 935 H ADV8	3,500 K	935/359	–	3,698 lm	4,109 lm	4,520 lm	–	130 lm/W	117°	>90
SLE 13mm 3000lm 940 H ADV8	4,000 K	940/359	–	3,782 lm	4,203 lm	4,623 lm	–	133 lm/W	117°	>90
SLE 15mm 4000lm – Operating mode HE at 400 mA										
SLE 15mm 4000lm 927 R ADV8	2,700 K	927/359	–	1,657 lm	1,841 lm	2,026 lm	–	143 lm/W	360°	>90
SLE 15mm 4000lm 930 R ADV8	3,000 K	930/359	–	1,699 lm	1,888 lm	2,076 lm	–	147 lm/W	360°	>90
SLE 15mm 4000lm 935 R ADV8	3,500 K	935/359	–	1,778 lm	1,975 lm	2,173 lm	–	154 lm/W	360°	>90
SLE 15mm 4000lm 940 R ADV8	4,000 K	940/359	–	1,827 lm	2,030 lm	2,233 lm	–	158 lm/W	360°	>90
SLE 15mm 4000lm 930 H ADV8	3,000 K	930/359	–	1,699 lm	1,888 lm	2,076 lm	–	147 lm/W	117°	>90
SLE 15mm 4000lm 940 H ADV8	4,000 K	940/359	–	1,827 lm	2,030 lm	2,233 lm	–	158 lm/W	117°	>90
SLE 15mm 4000lm 930 H ADV8 T	3,000 K	930/359	–	1,699 lm	1,888 lm	2,076 lm	–	147 lm/W	117°	>90
SLE 15mm 4000lm 940 H ADV8 T	4,000 K	940/359	–	1,827 lm	2,030 lm	2,233 lm	–	158 lm/W	117°	>90
SLE 15mm 4000lm – Operating mode NM at 800 mA										
SLE 15mm 4000lm 927 R ADV8	2,700 K	927/359	3,651 lm	3,040 lm	3,378 lm	3,716 lm	135 lm/W	126 lm/W	360°	>90
SLE 15mm 4000lm 930 R ADV8	3,000 K	930/359	3,784 lm	3,151 lm	3,501 lm	3,851 lm	139 lm/W	131 lm/W	360°	>90
SLE 15mm 4000lm 935 R ADV8	3,500 K	935/359	3,946 lm	3,287 lm	3,652 lm	4,017 lm	145 lm/W	137 lm/W	360°	>90
SLE 15mm 4000lm 940 R ADV8	4,000 K	940/359	4,151 lm	3,457 lm	3,842 lm	4,226 lm	153 lm/W	144 lm/W	360°	>90
SLE 15mm 4000lm 930 H ADV8	3,000 K	930/359	3,152 lm	3,151 lm	3,501 lm	3,851 lm	139 lm/W	131 lm/W	117°	>90
SLE 15mm 4000lm 940 H ADV8	4,000 K	940/359	3,458 lm	3,457 lm	3,842 lm	4,226 lm	153 lm/W	144 lm/W	117°	>90
SLE 15mm 4000lm 930 H ADV8 T	3,000 K	930/359	3,152 lm	3,151 lm	3,501 lm	3,851 lm	139 lm/W	131 lm/W	117°	>90
SLE 15mm 4000lm 940 H ADV8 T	4,000 K	940/359	3,458 lm	3,457 lm	3,842 lm	4,226 lm	153 lm/W	144 lm/W	117°	>90
SLE 15mm 4000lm – Operating mode HO at 1.050 mA										
SLE 15mm 4000lm 927 R ADV8	2,700 K	927/359	–	4,078 lm	4,531 lm	4,984 lm	–	127 lm/W	360°	>90
SLE 15mm 4000lm 930 R ADV8	3,000 K	930/359	–	4,190 lm	4,655 lm	5,121 lm	–	130 lm/W	360°	>90
SLE 15mm 4000lm 935 R ADV8	3,500 K	935/359	–	4,385 lm	4,872 lm	5,359 lm	–	136 lm/W	360°	>90
SLE 15mm 4000lm 940 R ADV8	4,000 K	940/359	–	4,517 lm	5,018 lm	5,520 lm	–	140 lm/W	360°	>90
SLE 15mm 4000lm 930 H ADV8	3,000 K	930/359	–	4,190 lm	4,655 lm	5,121 lm	–	130 lm/W	117°	>90
SLE 15mm 4000lm 940 H ADV8	4,000 K	940/359	–	4,517 lm	5,018 lm	5,520 lm	–	140 lm/W	117°	>90
SLE 15mm 4000lm 930 H ADV8 T	3,000 K	930/359	–	4,190 lm	4,655 lm	5,121 lm	–	130 lm/W	117°	>90
SLE 15mm 4000lm 940 H ADV8 T	4,000 K	940/359	–	4,517 lm	5,018 lm	5,520 lm	–	140 lm/W	117°	>90

^① HE ... high efficiency, NM ... nominal mode, HO ... high output.

^② The detailed explanation, see data sheet section 1.1.

^③ Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

^④ Measurement uncertainty ± 10 %. Based on calculation.

Photometric data

Type ^①	Colour temperature	Photometric Code ^②	Useful luminous flux at tp = 25 °C ^③	Luminous flux at tp rated ^④			Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Beam characteristic	Colour rendering index CRI
				Min.	Typ.	Max.				
SLE 17mm 5000lm – Operating mode HE at 450 mA										
SLE 17mm 5000lm 927 R ADV8	2,700 K	927/359	–	1,896 lm	2,107 lm	2,318 lm	–	147 lm/W	360°	>90
SLE 17mm 5000lm 930 R ADV8	3,000 K	930/359	–	1,953 lm	2,170 lm	2,387 lm	–	152 lm/W	360°	>90
SLE 17mm 5000lm 935 R ADV8	3,500 K	935/359	–	2,039 lm	2,266 lm	2,493 lm	–	159 lm/W	360°	>90
SLE 17mm 5000lm 940 R ADV8	4,000 K	940/359	–	2,097 lm	2,330 lm	2,563 lm	–	163 lm/W	360°	>90
SLE 17mm 5000lm 927 H ADV8	2,700 K	927/359	–	1,896 lm	2,107 lm	2,318 lm	–	147 lm/W	117°	>90
SLE 17mm 5000lm 930 H ADV8	3,000 K	930/359	–	1,953 lm	2,170 lm	2,387 lm	–	152 lm/W	117°	>90
SLE 17mm 5000lm 935 H ADV8	3,500 K	935/359	–	2,039 lm	2,266 lm	2,493 lm	–	159 lm/W	117°	>90
SLE 17mm 5000lm 940 H ADV8	4,000 K	940/359	–	2,097 lm	2,330 lm	2,563 lm	–	163 lm/W	117°	>90
SLE 17mm 5000lm 930 H ADV8 T	3,000 K	930/359	–	1,953 lm	2,170 lm	2,387 lm	–	152 lm/W	117°	>90
SLE 17mm 5000lm 935 H ADV8 T	3,500 K	935/359	–	2,039 lm	2,266 lm	2,493 lm	–	159 lm/W	117°	>90
SLE 17mm 5000lm 940 H ADV8 T	4,000 K	940/359	–	2,097 lm	2,330 lm	2,563 lm	–	163 lm/W	117°	>90
SLE 17mm 5000lm – Operating mode NM at 900 mA										
SLE 17mm 5000lm 927 R ADV8	2,700 K	927/359	4,301 lm	3,600 lm	4,000 lm	4,400 lm	142 lm/W	135 lm/W	360°	>90
SLE 17mm 5000lm 930 R ADV8	3,000 K	930/359	4,583 lm	3,836 lm	4,262 lm	4,689 lm	151 lm/W	143 lm/W	360°	>90
SLE 17mm 5000lm 935 R ADV8	3,500 K	935/359	4,654 lm	3,895 lm	4,328 lm	4,761 lm	154 lm/W	146 lm/W	360°	>90
SLE 17mm 5000lm 940 R ADV8	4,000 K	940/359	4,816 lm	4,031 lm	4,478 lm	4,926 lm	159 lm/W	151 lm/W	360°	>90
SLE 17mm 5000lm 927 H ADV8	2,700 K	927/359	3,583 lm	3,600 lm	4,000 lm	4,400 lm	142 lm/W	135 lm/W	117°	>90
SLE 17mm 5000lm 930 H ADV8	3,000 K	930/359	3,818 lm	3,836 lm	4,262 lm	4,689 lm	151 lm/W	143 lm/W	117°	>90
SLE 17mm 5000lm 935 H ADV8	3,500 K	935/359	3,877 lm	3,895 lm	4,328 lm	4,761 lm	154 lm/W	146 lm/W	117°	>90
SLE 17mm 5000lm 940 H ADV8	4,000 K	940/359	4,012 lm	4,031 lm	4,478 lm	4,926 lm	159 lm/W	151 lm/W	117°	>90
SLE 17mm 5000lm 930 H ADV8 T	3,000 K	930/359	3,818 lm	3,836 lm	4,262 lm	4,689 lm	151 lm/W	143 lm/W	117°	>90
SLE 17mm 5000lm 935 H ADV8 T	3,500 K	935/359	3,877 lm	3,895 lm	4,328 lm	4,761 lm	154 lm/W	146 lm/W	117°	>90
SLE 17mm 5000lm 940 H ADV8 T	4,000 K	940/359	4,012 lm	4,031 lm	4,478 lm	4,926 lm	159 lm/W	151 lm/W	117°	>90
SLE 17mm 5000lm – Operating mode HO at 1.200 mA										
SLE 17mm 5000lm 927 R ADV8	2,700 K	927/359	–	4,759 lm	5,288 lm	5,817 lm	–	131 lm/W	360°	>90
SLE 17mm 5000lm 930 R ADV8	3,000 K	930/359	–	4,854 lm	5,393 lm	5,933 lm	–	134 lm/W	360°	>90
SLE 17mm 5000lm 935 R ADV8	3,500 K	935/359	–	5,131 lm	5,701 lm	6,271 lm	–	141 lm/W	360°	>90
SLE 17mm 5000lm 940 R ADV8	4,000 K	940/359	–	5,275 lm	5,862 lm	6,448 lm	–	145 lm/W	360°	>90
SLE 17mm 5000lm 927 H ADV8	2,700 K	927/359	–	4,759 lm	5,288 lm	5,817 lm	–	131 lm/W	117°	>90
SLE 17mm 5000lm 930 H ADV8	3,000 K	930/359	–	4,854 lm	5,393 lm	5,933 lm	–	134 lm/W	117°	>90
SLE 17mm 5000lm 935 H ADV8	3,500 K	935/359	–	5,131 lm	5,701 lm	6,271 lm	–	141 lm/W	117°	>90
SLE 17mm 5000lm 940 H ADV8	4,000 K	940/359	–	5,275 lm	5,862 lm	6,448 lm	–	145 lm/W	117°	>90
SLE 17mm 5000lm 930 H ADV8 T	3,000 K	930/359	–	4,854 lm	5,393 lm	5,933 lm	–	134 lm/W	117°	>90
SLE 17mm 5000lm 935 H ADV8 T	3,500 K	935/359	–	5,131 lm	5,701 lm	6,271 lm	–	141 lm/W	117°	>90
SLE 17mm 5000lm 940 H ADV8 T	4,000 K	940/359	–	5,275 lm	5,862 lm	6,448 lm	–	145 lm/W	117°	>90

^① HE ... high efficiency, NM ... nominal mode, HO ... high output,

^② The detailed explanation, see data sheet section 1.1,

^③ Tolerance of useful light flux - 0 % / + 15 %, Measurement uncertainty ± 10 %,

^④ Measurement uncertainty ± 10 %, Based on calculation,

Photometric data

Type ^①	Colour temperature	Photometric Code ^②	Useful luminous flux at tp = 25 °C ^③	Luminous flux at tp rated ^④			Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Beam characteristic	Colour rendering index CRI
				Min.	Typ.	Max.				
SLE 21mm 6000lm – Operating mode HE at 700 mA										
SLE 21mm 6000lm 927 R ADV8	2,700 K	927/359	–	2,966 lm	3,295 lm	3,625 lm	–	147 lm/W	360°	>90
SLE 21mm 6000lm 930 R ADV8	3,000 K	930/359	–	3,069 lm	3,410 lm	3,751 lm	–	152 lm/W	360°	>90
SLE 21mm 6000lm 935 R ADV8	3,500 K	935/359	–	3,222 lm	3,580 lm	3,938 lm	–	160 lm/W	360°	>90
SLE 21mm 6000lm 940 R ADV8	4,000 K	940/359	–	3,289 lm	3,655 lm	4,020 lm	–	163 lm/W	360°	>90
SLE 21mm 6000lm 927 H ADV8	2,700 K	927/359	–	2,966 lm	3,295 lm	3,625 lm	–	147 lm/W	117°	>90
SLE 21mm 6000lm 930 H ADV8	3,000 K	930/359	–	3,069 lm	3,410 lm	3,751 lm	–	152 lm/W	117°	>90
SLE 21mm 6000lm 935 H ADV8	3,500 K	935/359	–	3,222 lm	3,580 lm	3,938 lm	–	160 lm/W	117°	>90
SLE 21mm 6000lm 940 H ADV8	4,000 K	940/359	–	3,289 lm	3,655 lm	4,020 lm	–	163 lm/W	117°	>90
SLE 21mm 6000lm 930 H ADV8 T	3,000 K	930/359	–	3,069 lm	3,410 lm	3,751 lm	–	152 lm/W	117°	>90
SLE 21mm 6000lm 940 H ADV8 T	4,000 K	940/359	–	3,289 lm	3,655 lm	4,020 lm	–	163 lm/W	117°	>90
SLE 21mm 6000lm – Operating mode NM at 1.200 mA										
SLE 21mm 6000lm 927 R ADV8	2,700 K	927/359	5,833 lm	4,881 lm	5,424 lm	5,966 lm	145 lm/W	137 lm/W	360°	>90
SLE 21mm 6000lm 930 R ADV8	3,000 K	930/359	6,214 lm	5,202 lm	5,779 lm	6,357 lm	154 lm/W	146 lm/W	360°	>90
SLE 21mm 6000lm 935 R ADV8	3,500 K	935/359	6,309 lm	5,280 lm	5,867 lm	6,454 lm	157 lm/W	149 lm/W	360°	>90
SLE 21mm 6000lm 940 R ADV8	4,000 K	940/359	6,528 lm	5,464 lm	6,072 lm	6,679 lm	162 lm/W	154 lm/W	360°	>90
SLE 21mm 6000lm 927 H ADV8	2,700 K	927/359	4,833 lm	4,881 lm	5,424 lm	5,966 lm	145 lm/W	137 lm/W	117°	>90
SLE 21mm 6000lm 930 H ADV8	3,000 K	930/359	5,176 lm	5,202 lm	5,779 lm	6,357 lm	154 lm/W	146 lm/W	117°	>90
SLE 21mm 6000lm 935 H ADV8	3,500 K	935/359	5,255 lm	5,280 lm	5,867 lm	6,454 lm	157 lm/W	149 lm/W	117°	>90
SLE 21mm 6000lm 940 H ADV8	4,000 K	940/359	5,438 lm	5,464 lm	6,072 lm	6,679 lm	162 lm/W	154 lm/W	117°	>90
SLE 21mm 6000lm 930 H ADV8 T	3,000 K	930/359	5,176 lm	5,202 lm	5,779 lm	6,357 lm	154 lm/W	146 lm/W	117°	>90
SLE 21mm 6000lm 940 H ADV8 T	4,000 K	940/359	5,438 lm	5,464 lm	6,072 lm	6,679 lm	162 lm/W	154 lm/W	117°	>90
SLE 21mm 6000lm – Operating mode HO at 1.800 mA										
SLE 21mm 6000lm 927 R ADV8	2,700 K	927/359	–	7,109 lm	7,898 lm	8,688 lm	–	130 lm/W	360°	>90
SLE 21mm 6000lm 930 R ADV8	3,000 K	930/359	–	7,373 lm	8,192 lm	9,011 lm	–	135 lm/W	360°	>90
SLE 21mm 6000lm 935 R ADV8	3,500 K	935/359	–	7,800 lm	8,667 lm	9,534 lm	–	142 lm/W	360°	>90
SLE 21mm 6000lm 940 R ADV8	4,000 K	940/359	–	7,970 lm	8,856 lm	9,741 lm	–	145 lm/W	360°	>90
SLE 21mm 6000lm 927 H ADV8	2,700 K	927/359	–	7,109 lm	7,898 lm	8,688 lm	–	130 lm/W	117°	>90
SLE 21mm 6000lm 930 H ADV8	3,000 K	930/359	–	7,373 lm	8,192 lm	9,011 lm	–	135 lm/W	117°	>90
SLE 21mm 6000lm 935 H ADV8	3,500 K	935/359	–	7,800 lm	8,667 lm	9,534 lm	–	142 lm/W	117°	>90
SLE 21mm 6000lm 940 H ADV8	4,000 K	940/359	–	7,970 lm	8,856 lm	9,741 lm	–	145 lm/W	117°	>90
SLE 21mm 6000lm 930 H ADV8 T	3,000 K	930/359	–	7,373 lm	8,192 lm	9,011 lm	–	135 lm/W	117°	>90
SLE 21mm 6000lm 940 H ADV8 T	4,000 K	940/359	–	7,970 lm	8,856 lm	9,741 lm	–	145 lm/W	117°	>90

^① HE ... high efficiency, NM ... nominal mode, HO ... high output.

^② The detailed explanation, see data sheet section 1.1.

^③ Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

^④ Measurement uncertainty ± 10 %. Based on calculation.

Electrical data

Type ^①	Forward current	Min. forward voltage at tp rated	Typ. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C ^②	Energy classification	Energy consumption	Type of light source
SLE 04mm 800lm – Operating mode HE at 150 mA								
SLE 04mm 800lm 930 R ADV8	150 mA	31.5 V	34.2 V	37.6 V	–	–	–	–
SLE 04mm 800lm 940 R ADV8	150 mA	31.5 V	34.2 V	37.6 V	–	–	–	–
SLE 04mm 800lm – Operating mode NM at 180 mA								
SLE 04mm 800lm 930 R ADV8	180 mA	32.2 V	35.0 V	38.5 V	6.4 W	E	7 kWh / 1,000 h	non-directional
SLE 04mm 800lm 940 R ADV8	180 mA	32.2 V	35.0 V	38.5 V	6.4 W	E	7 kWh / 1,000 h	non-directional
SLE 04mm 800lm – Operating mode HO at 200 mA								
SLE 04mm 800lm 930 R ADV8	200 mA	32.5 V	35.3 V	38.7 V	–	–	–	–
SLE 04mm 800lm 940 R ADV8	200 mA	32.5 V	35.3 V	38.7 V	–	–	–	–
SLE 06mm 1600lm – Operating mode HE at 180 mA								
SLE 06mm 1600lm 930 R ADV8	180 mA	30.4 V	33.0 V	36.2 V	–	–	–	–
SLE 06mm 1600lm 940 R ADV8	180 mA	30.4 V	33.0 V	36.2 V	–	–	–	–
SLE 06mm 1600lm – Operating mode NM at 300 mA								
SLE 06mm 1600lm 930 R ADV8	300 mA	31.7 V	34.4 V	37.8 V	10.5 W	E	11 kWh / 1,000 h	non-directional
SLE 06mm 1600lm 940 R ADV8	300 mA	31.7 V	34.4 V	37.8 V	10.5 W	E	11 kWh / 1,000 h	non-directional
SLE 06mm 1600lm – Operating mode HO at 400 mA								
SLE 06mm 1600lm 930 R ADV8	400 mA	32.4 V	35.2 V	38.6 V	–	–	–	–
SLE 06mm 1600lm 940 R ADV8	400 mA	32.4 V	35.2 V	38.6 V	–	–	–	–
SLE 09mm 800lm – Operating mode HE at 250 mA								
SLE 09mm 800lm 930 R ADV8	250 mA	31.1 V	33.8 V	37.1 V	–	–	–	–
SLE 09mm 800lm 935 R ADV8	250 mA	31.1 V	33.8 V	37.1 V	–	–	–	–
SLE 09mm 800lm 940 R ADV8	250 mA	31.1 V	33.8 V	37.1 V	–	–	–	–
SLE 09mm 800lm – Operating mode NM at 350 mA								
SLE 09mm 800lm 930 R ADV8	350 mA	32.2 V	35.0 V	38.5 V	12.5 W	E	13 kWh / 1,000 h	non-directional
SLE 09mm 800lm 935 R ADV8	350 mA	32.2 V	35.0 V	38.5 V	12.5 W	E	13 kWh / 1,000 h	non-directional
SLE 09mm 800lm 940 R ADV8	350 mA	32.2 V	35.0 V	38.5 V	12.5 W	E	13 kWh / 1,000 h	non-directional
SLE 09mm 800lm – Operating mode HO at 450 mA								
SLE 09mm 800lm 930 R ADV8	450 mA	33.0 V	35.9 V	39.2 V	–	–	–	–
SLE 09mm 800lm 935 R ADV8	450 mA	33.0 V	35.9 V	39.2 V	–	–	–	–
SLE 09mm 800lm 940 R ADV8	450 mA	33.0 V	35.9 V	39.2 V	–	–	–	–
SLE 09mm 1200lm – Operating mode HE at 250 mA								
SLE 09mm 1200lm 927 R ADV8	250 mA	30.3 V	32.9 V	36.0 V	–	–	–	–
SLE 09mm 1200lm 930 R ADV8	250 mA	30.3 V	32.9 V	36.0 V	–	–	–	–
SLE 09mm 1200lm 940 R ADV8	250 mA	30.3 V	32.9 V	36.0 V	–	–	–	–
SLE 09mm 1200lm – Operating mode NM at 350 mA								
SLE 09mm 1200lm 927 R ADV8	350 mA	30.9 V	33.6 V	36.8 V	11.9 W	E	12 kWh / 1,000 h	non-directional
SLE 09mm 1200lm 930 R ADV8	350 mA	30.9 V	33.6 V	36.8 V	11.9 W	E	12 kWh / 1,000 h	non-directional
SLE 09mm 1200lm 940 R ADV8	350 mA	30.9 V	33.6 V	36.8 V	11.9 W	D	12 kWh / 1,000 h	non-directional
SLE 09mm 1200lm – Operating mode HO at 500 mA								
SLE 09mm 1200lm 927 R ADV8	500 mA	31.9 V	34.6 V	37.9 V	–	–	–	–
SLE 09mm 1200lm 930 R ADV8	500 mA	31.9 V	34.6 V	37.9 V	–	–	–	–
SLE 09mm 1200lm 940 R ADV8	500 mA	31.9 V	34.6 V	37.9 V	–	–	–	–

^① HE ... high efficiency, NM ... nominal mode, HO ... high output.

^② Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.

Electrical data

Type ^①	Forward current	Min. forward voltage at tp rated	Typ. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C ^②	Energy classification	Energy consumption	Type of light source
SLE 09mm 2600lm – Operating mode HE at 450 mA								
SLE 09mm 2600lm 927 R ADV8	450 mA	30.9 V	33.6 V	36.8 V	–	–	–	–
SLE 09mm 2600lm 930 R ADV8	450 mA	30.9 V	33.6 V	36.8 V	–	–	–	–
SLE 09mm 2600lm 935 R ADV8	450 mA	30.9 V	33.6 V	36.8 V	–	–	–	–
SLE 09mm 2600lm 940 R ADV8	450 mA	30.9 V	33.6 V	36.8 V	–	–	–	–
SLE 09mm 2600lm – Operating mode NM at 600 mA								
SLE 09mm 2600lm 927 R ADV8	600 mA	31.7 V	34.5 V	37.8 V	21.0 W	E	21 kWh / 1,000 h	non-directional
SLE 09mm 2600lm 930 R ADV8	600 mA	31.7 V	34.5 V	37.8 V	21.0 W	E	21 kWh / 1,000 h	non-directional
SLE 09mm 2600lm 935 R ADV8	600 mA	31.7 V	34.5 V	37.8 V	21.0 W	E	21 kWh / 1,000 h	non-directional
SLE 09mm 2600lm 940 R ADV8	600 mA	31.7 V	34.5 V	37.8 V	21.0 W	E	21 kWh / 1,000 h	non-directional
SLE 09mm 2600lm – Operating mode HO at 800 mA								
SLE 09mm 2600lm 927 R ADV8	800 mA	32.5 V	35.4 V	38.7 V	–	–	–	–
SLE 09mm 2600lm 930 R ADV8	800 mA	32.5 V	35.4 V	38.7 V	–	–	–	–
SLE 09mm 2600lm 935 R ADV8	800 mA	32.5 V	35.4 V	38.7 V	–	–	–	–
SLE 09mm 2600lm 940 R ADV8	800 mA	32.5 V	35.4 V	38.7 V	–	–	–	–

^① HE ... high efficiency, NM ... nominal mode, HO ... high output.

^② Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.

Electrical data

Type ^①	Forward current	Min. forward voltage at tp rated	Typ. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C ^②	Energy classification	Energy consumption	Type of light source
SLE 13mm 3000lm – Operating mode HE at 350 mA								
SLE 13mm 3000lm 927 R ADV8	350 mA	30.0 V	32.7 V	35.8 V	–	–	–	–
SLE 13mm 3000lm 930 R ADV8	350 mA	30.0 V	32.7 V	35.8 V	–	–	–	–
SLE 13mm 3000lm 935 R ADV8	350 mA	30.0 V	32.7 V	35.8 V	–	–	–	–
SLE 13mm 3000lm 940 R ADV8	350 mA	30.0 V	32.7 V	35.8 V	–	–	–	–
SLE 13mm 3000lm 927 H ADV8	350 mA	30.0 V	32.7 V	35.8 V	–	–	–	–
SLE 13mm 3000lm 930 H ADV8	350 mA	30.0 V	32.7 V	35.8 V	–	–	–	–
SLE 13mm 3000lm 935 H ADV8	350 mA	30.0 V	32.7 V	35.8 V	–	–	–	–
SLE 13mm 3000lm 940 H ADV8	350 mA	30.0 V	32.7 V	35.8 V	–	–	–	–
SLE 13mm 3000lm – Operating mode NM at 500 mA								
SLE 13mm 3000lm 927 R ADV8	500 mA	30.4 V	33.0 V	36.2 V	16.8 W	E	17 kWh / 1,000 h	non-directional
SLE 13mm 3000lm 930 R ADV8	500 mA	30.4 V	33.0 V	36.2 V	16.8 W	D	17 kWh / 1,000 h	non-directional
SLE 13mm 3000lm 935 R ADV8	500 mA	30.4 V	33.0 V	36.2 V	16.8 W	D	17 kWh / 1,000 h	non-directional
SLE 13mm 3000lm 940 R ADV8	500 mA	30.4 V	33.0 V	36.2 V	16.8 W	D	17 kWh / 1,000 h	non-directional
SLE 13mm 3000lm 927 H ADV8	500 mA	30.4 V	33.0 V	36.2 V	16.8 W	E	17 kWh / 1,000 h	directional
SLE 13mm 3000lm 930 H ADV8	500 mA	30.4 V	33.0 V	36.2 V	16.8 W	E	17 kWh / 1,000 h	directional
SLE 13mm 3000lm 935 H ADV8	500 mA	30.4 V	33.0 V	36.2 V	16.8 W	D	17 kWh / 1,000 h	directional
SLE 13mm 3000lm 940 H ADV8	500 mA	30.4 V	33.0 V	36.2 V	16.8 W	D	17 kWh / 1,000 h	directional
SLE 13mm 3000lm – Operating mode HO at 900 mA								
SLE 13mm 3000lm 927 R ADV8	900 mA	32.2 V	35.0 V	38.3 V	–	–	–	–
SLE 13mm 3000lm 930 R ADV8	900 mA	32.2 V	35.0 V	38.3 V	–	–	–	–
SLE 13mm 3000lm 935 R ADV8	900 mA	32.2 V	35.0 V	38.3 V	–	–	–	–
SLE 13mm 3000lm 940 R ADV8	900 mA	32.2 V	35.0 V	38.3 V	–	–	–	–
SLE 13mm 3000lm 927 H ADV8	900 mA	32.2 V	35.0 V	38.3 V	–	–	–	–
SLE 13mm 3000lm 930 H ADV8	900 mA	32.2 V	35.0 V	38.3 V	–	–	–	–
SLE 13mm 3000lm 935 H ADV8	900 mA	32.2 V	35.0 V	38.3 V	–	–	–	–
SLE 13mm 3000lm 940 H ADV8	900 mA	32.2 V	35.0 V	38.3 V	–	–	–	–
SLE 15mm 4000lm – Operating mode HE at 400 mA								
SLE 15mm 4000lm 927 R ADV8	400 mA	29.6 V	32.2 V	35.2 V	–	–	–	–
SLE 15mm 4000lm 930 R ADV8	400 mA	29.6 V	32.2 V	35.2 V	–	–	–	–
SLE 15mm 4000lm 935 R ADV8	400 mA	29.6 V	32.2 V	35.2 V	–	–	–	–
SLE 15mm 4000lm 940 R ADV8	400 mA	29.6 V	32.2 V	35.2 V	–	–	–	–
SLE 15mm 4000lm 930 H ADV8	400 mA	29.6 V	32.2 V	35.2 V	–	–	–	–
SLE 15mm 4000lm 940 H ADV8	400 mA	29.6 V	32.2 V	35.2 V	–	–	–	–
SLE 15mm 4000lm 930 H ADV8 T	400 mA	29.6 V	32.2 V	35.2 V	–	–	–	–
SLE 15mm 4000lm 940 H ADV8 T	400 mA	29.6 V	32.2 V	35.2 V	–	–	–	–
SLE 15mm 4000lm – Operating mode NM at 800 mA								
SLE 15mm 4000lm 927 R ADV8	800 mA	30.8 V	33.4 V	36.6 V	271 W	E	28 kWh / 1,000 h	non-directional
SLE 15mm 4000lm 930 R ADV8	800 mA	30.8 V	33.4 V	36.6 V	271 W	E	28 kWh / 1,000 h	non-directional
SLE 15mm 4000lm 935 R ADV8	800 mA	30.8 V	33.4 V	36.6 V	271 W	E	28 kWh / 1,000 h	non-directional
SLE 15mm 4000lm 940 R ADV8	800 mA	30.8 V	33.4 V	36.6 V	271 W	D	28 kWh / 1,000 h	non-directional
SLE 15mm 4000lm 930 H ADV8	800 mA	30.8 V	33.4 V	36.6 V	271 W	E	28 kWh / 1,000 h	directional
SLE 15mm 4000lm 940 H ADV8	800 mA	30.8 V	33.4 V	36.6 V	271 W	D	28 kWh / 1,000 h	directional
SLE 15mm 4000lm 930 H ADV8 T	800 mA	30.8 V	33.4 V	36.6 V	271 W	E	28 kWh / 1,000 h	directional
SLE 15mm 4000lm 940 H ADV8 T	800 mA	30.8 V	33.4 V	36.6 V	271 W	D	28 kWh / 1,000 h	directional
SLE 15mm 4000lm – Operating mode HO at 1.050 mA								
SLE 15mm 4000lm 927 R ADV8	1,050 mA	31.3 V	34.1 V	37.3 V	–	–	–	–
SLE 15mm 4000lm 930 R ADV8	1,050 mA	31.3 V	34.1 V	37.3 V	–	–	–	–
SLE 15mm 4000lm 935 R ADV8	1,050 mA	31.3 V	34.1 V	37.3 V	–	–	–	–
SLE 15mm 4000lm 940 R ADV8	1,050 mA	31.3 V	34.1 V	37.3 V	–	–	–	–
SLE 15mm 4000lm 930 H ADV8	1,050 mA	31.3 V	34.1 V	37.3 V	–	–	–	–
SLE 15mm 4000lm 940 H ADV8	1,050 mA	31.3 V	34.1 V	37.3 V	–	–	–	–
SLE 15mm 4000lm 930 H ADV8 T	1,050 mA	31.3 V	34.1 V	37.3 V	–	–	–	–
SLE 15mm 4000lm 940 H ADV8 T	1,050 mA	31.3 V	34.1 V	37.3 V	–	–	–	–

^① HE ... high efficiency, NM ... nominal mode, HO ... high output.

^② Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.

Electrical data

Type ^①	Forward current	Min. forward voltage at tp rated	Typ. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C ^②	Energy classification	Energy consumption	Type of light source
SLE 17mm 5000lm – Operating mode HE at 450 mA								
SLE 17mm 5000lm 927 R ADV8	450 mA	29.2 V	31.8 V	35.0 V	–	–	–	–
SLE 17mm 5000lm 930 R ADV8	450 mA	29.2 V	31.8 V	35.0 V	–	–	–	–
SLE 17mm 5000lm 935 R ADV8	450 mA	29.2 V	31.8 V	35.0 V	–	–	–	–
SLE 17mm 5000lm 940 R ADV8	450 mA	29.2 V	31.8 V	35.0 V	–	–	–	–
SLE 17mm 5000lm 927 H ADV8	450 mA	29.2 V	31.8 V	35.0 V	–	–	–	–
SLE 17mm 5000lm 930 H ADV8	450 mA	29.2 V	31.8 V	35.0 V	–	–	–	–
SLE 17mm 5000lm 935 H ADV8	450 mA	29.2 V	31.8 V	35.0 V	–	–	–	–
SLE 17mm 5000lm 940 H ADV8	450 mA	29.2 V	31.8 V	35.0 V	–	–	–	–
SLE 17mm 5000lm 930 H ADV8 T	450 mA	29.2 V	31.8 V	35.0 V	–	–	–	–
SLE 17mm 5000lm 935 H ADV8 T	450 mA	29.2 V	31.8 V	35.0 V	–	–	–	–
SLE 17mm 5000lm 940 H ADV8 T	450 mA	29.2 V	31.8 V	35.0 V	–	–	–	–
SLE 17mm 5000lm – Operating mode NM at 900 mA								
SLE 17mm 5000lm 927 R ADV8	900 mA	30.4 V	33.0 V	36.4 V	30.3 W	E	31 kWh / 1,000 h	non-directional
SLE 17mm 5000lm 930 R ADV8	900 mA	30.4 V	33.0 V	36.4 V	30.3 W	D	31 kWh / 1,000 h	non-directional
SLE 17mm 5000lm 935 R ADV8	900 mA	30.4 V	33.0 V	36.4 V	30.3 W	D	31 kWh / 1,000 h	non-directional
SLE 17mm 5000lm 940 R ADV8	900 mA	30.4 V	33.0 V	36.4 V	30.3 W	D	31 kWh / 1,000 h	non-directional
SLE 17mm 5000lm 927 H ADV8	900 mA	30.4 V	33.0 V	36.4 V	30.3 W	E	31 kWh / 1,000 h	directional
SLE 17mm 5000lm 930 H ADV8	900 mA	30.4 V	33.0 V	36.4 V	30.3 W	D	31 kWh / 1,000 h	directional
SLE 17mm 5000lm 935 H ADV8	900 mA	30.4 V	33.0 V	36.4 V	30.3 W	D	31 kWh / 1,000 h	directional
SLE 17mm 5000lm 940 H ADV8	900 mA	30.4 V	33.0 V	36.4 V	30.3 W	D	31 kWh / 1,000 h	directional
SLE 17mm 5000lm 930 H ADV8 T	900 mA	30.4 V	33.0 V	36.4 V	30.3 W	D	31 kWh / 1,000 h	directional
SLE 17mm 5000lm 935 H ADV8 T	900 mA	30.4 V	33.0 V	36.4 V	30.3 W	D	31 kWh / 1,000 h	directional
SLE 17mm 5000lm 940 H ADV8 T	900 mA	30.4 V	33.0 V	36.4 V	30.3 W	D	31 kWh / 1,000 h	directional
SLE 17mm 5000lm – Operating mode HO at 1.200 mA								
SLE 17mm 5000lm 927 R ADV8	1,200 mA	30.9 V	33.6 V	37.0 V	–	–	–	–
SLE 17mm 5000lm 930 R ADV8	1,200 mA	30.9 V	33.6 V	37.0 V	–	–	–	–
SLE 17mm 5000lm 935 R ADV8	1,200 mA	30.9 V	33.6 V	37.0 V	–	–	–	–
SLE 17mm 5000lm 940 R ADV8	1,200 mA	30.9 V	33.6 V	37.0 V	–	–	–	–
SLE 17mm 5000lm 927 H ADV8	1,200 mA	30.9 V	33.6 V	37.0 V	–	–	–	–
SLE 17mm 5000lm 930 H ADV8	1,200 mA	30.9 V	33.6 V	37.0 V	–	–	–	–
SLE 17mm 5000lm 935 H ADV8	1,200 mA	30.9 V	33.6 V	37.0 V	–	–	–	–
SLE 17mm 5000lm 940 H ADV8	1,200 mA	30.9 V	33.6 V	37.0 V	–	–	–	–
SLE 17mm 5000lm 930 H ADV8 T	1,200 mA	30.9 V	33.6 V	37.0 V	–	–	–	–
SLE 17mm 5000lm 935 H ADV8 T	1,200 mA	30.9 V	33.6 V	37.0 V	–	–	–	–
SLE 17mm 5000lm 940 H ADV8 T	1,200 mA	30.9 V	33.6 V	37.0 V	–	–	–	–

^① HE ... high efficiency, NM ... nominal mode, HO ... high output.

^② Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.

Electrical data

Type ^①	Forward current	Min. forward voltage at tp rated	Typ. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C ^②	Energy classification	Energy consumption	Type of light source
SLE 21mm 6000lm – Operating mode HE at 700 mA								
SLE 21mm 6000lm 927 R ADV8	700 mA	29,4 V	32,0 V	35,3 V	–	–	–	–
SLE 21mm 6000lm 930 R ADV8	700 mA	29,4 V	32,0 V	35,3 V	–	–	–	–
SLE 21mm 6000lm 935 R ADV8	700 mA	29,4 V	32,0 V	35,3 V	–	–	–	–
SLE 21mm 6000lm 940 R ADV8	700 mA	29,4 V	32,0 V	35,3 V	–	–	–	–
SLE 21mm 6000lm 927 H ADV8	700 mA	29,4 V	32,0 V	35,3 V	–	–	–	–
SLE 21mm 6000lm 930 H ADV8	700 mA	29,4 V	32,0 V	35,3 V	–	–	–	–
SLE 21mm 6000lm 935 H ADV8	700 mA	29,4 V	32,0 V	35,3 V	–	–	–	–
SLE 21mm 6000lm 940 H ADV8	700 mA	29,4 V	32,0 V	35,3 V	–	–	–	–
SLE 21mm 6000lm 930 H ADV8 T	700 mA	29,4 V	32,0 V	35,3 V	–	–	–	–
SLE 21mm 6000lm 940 H ADV8 T	700 mA	29,4 V	32,0 V	35,3 V	–	–	–	–
SLE 21mm 6000lm – Operating mode NM at 1.200 mA								
SLE 21mm 6000lm 927 R ADV8	1,200 mA	30,3 V	32,9 V	36,2 V	40,3 W	E	41 kWh / 1,000 h	non-directional
SLE 21mm 6000lm 930 R ADV8	1,200 mA	30,3 V	32,9 V	36,2 V	40,3 W	D	41 kWh / 1,000 h	non-directional
SLE 21mm 6000lm 935 R ADV8	1,200 mA	30,3 V	32,9 V	36,2 V	40,3 W	D	41 kWh / 1,000 h	non-directional
SLE 21mm 6000lm 940 R ADV8	1,200 mA	30,3 V	32,9 V	36,2 V	40,3 W	D	41 kWh / 1,000 h	non-directional
SLE 21mm 6000lm 927 H ADV8	1,200 mA	30,3 V	32,9 V	36,2 V	40,3 W	E	41 kWh / 1,000 h	directional
SLE 21mm 6000lm 930 H ADV8	1,200 mA	30,3 V	32,9 V	36,2 V	40,3 W	D	41 kWh / 1,000 h	directional
SLE 21mm 6000lm 935 H ADV8	1,200 mA	30,3 V	32,9 V	36,2 V	40,3 W	D	41 kWh / 1,000 h	directional
SLE 21mm 6000lm 940 H ADV8	1,200 mA	30,3 V	32,9 V	36,2 V	40,3 W	D	41 kWh / 1,000 h	directional
SLE 21mm 6000lm 930 H ADV8 T	1,200 mA	30,3 V	32,9 V	36,2 V	40,3 W	D	41 kWh / 1,000 h	directional
SLE 21mm 6000lm 940 H ADV8 T	1,200 mA	30,3 V	32,9 V	36,2 V	40,3 W	D	41 kWh / 1,000 h	directional
SLE 21mm 6000lm – Operating mode HO at 1.800 mA								
SLE 21mm 6000lm 927 R ADV8	1,800 mA	31,1 V	33,8 V	37,3 V	–	–	–	–
SLE 21mm 6000lm 930 R ADV8	1,800 mA	31,1 V	33,8 V	37,3 V	–	–	–	–
SLE 21mm 6000lm 935 R ADV8	1,800 mA	31,1 V	33,8 V	37,3 V	–	–	–	–
SLE 21mm 6000lm 940 R ADV8	1,800 mA	31,1 V	33,8 V	37,3 V	–	–	–	–
SLE 21mm 6000lm 927 H ADV8	1,800 mA	31,1 V	33,8 V	37,3 V	–	–	–	–
SLE 21mm 6000lm 930 H ADV8	1,800 mA	31,1 V	33,8 V	37,3 V	–	–	–	–
SLE 21mm 6000lm 935 H ADV8	1,800 mA	31,1 V	33,8 V	37,3 V	–	–	–	–
SLE 21mm 6000lm 940 H ADV8	1,800 mA	31,1 V	33,8 V	37,3 V	–	–	–	–
SLE 21mm 6000lm 930 H ADV8 T	1,800 mA	31,1 V	33,8 V	37,3 V	–	–	–	–
SLE 21mm 6000lm 940 H ADV8 T	1,800 mA	31,1 V	33,8 V	37,3 V	–	–	–	–

^① HE ... high efficiency, NM ... nominal mode, HO ... high output.

^② Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.

Specific technical data

Type	I _{rated}	I _{max}	Max. permissible LF current ripple	Max. permissible peak current / max. pulse width	Max. working voltage for insulation SELV [®]	Electrical strength	t _a	t _p rated	t _c
SLE 04mm 800lm 930 R ADV8	180 mA	220 mA	242 mA	260 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 04mm 800lm 940 R ADV8	180 mA	220 mA	242 mA	260 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 06mm 1600lm 930 R ADV8	300 mA	440 mA	484 mA	520 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 06mm 1600lm 940 R ADV8	300 mA	440 mA	484 mA	520 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 09mm 800lm 930 R ADV8	350 mA	500 mA	550 mA	600 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 09mm 800lm 935 R ADV8	350 mA	500 mA	550 mA	600 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 09mm 800lm 940 R ADV8	350 mA	500 mA	550 mA	600 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 09mm 1200lm 927 R ADV8	350 mA	540 mA	594 mA	640 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 09mm 1200lm 930 R ADV8	350 mA	540 mA	594 mA	640 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 09mm 1200lm 940 R ADV8	350 mA	540 mA	594 mA	640 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 09mm 2600lm 927 R ADV8	600 mA	880 mA	968 mA	1,050 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 09mm 2600lm 930 R ADV8	600 mA	880 mA	968 mA	1,050 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 09mm 2600lm 935 R ADV8	600 mA	880 mA	968 mA	1,050 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 09mm 2600lm 940 R ADV8	600 mA	880 mA	968 mA	1,050 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 13mm 3000lm 927 R ADV8	500 mA	1,000 mA	1,100 mA	1,200 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 13mm 3000lm 930 R ADV8	500 mA	1,000 mA	1,100 mA	1,200 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 13mm 3000lm 935 R ADV8	500 mA	1,000 mA	1,100 mA	1,200 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 13mm 3000lm 940 R ADV8	500 mA	1,000 mA	1,100 mA	1,200 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 13mm 3000lm 927 H ADV8	500 mA	1,000 mA	1,100 mA	1,200 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 13mm 3000lm 930 H ADV8	500 mA	1,000 mA	1,100 mA	1,200 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 13mm 3000lm 935 H ADV8	500 mA	1,000 mA	1,100 mA	1,200 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 13mm 3000lm 940 H ADV8	500 mA	1,000 mA	1,100 mA	1,200 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 15mm 4000lm 927 R ADV8	800 mA	1,120 mA	1,232 mA	1,340 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 15mm 4000lm 930 R ADV8	800 mA	1,120 mA	1,232 mA	1,340 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 15mm 4000lm 935 R ADV8	800 mA	1,120 mA	1,232 mA	1,340 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 15mm 4000lm 940 R ADV8	800 mA	1,120 mA	1,232 mA	1,340 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 15mm 4000lm 930 H ADV8	800 mA	1,120 mA	1,232 mA	1,340 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 15mm 4000lm 940 H ADV8	800 mA	1,120 mA	1,232 mA	1,340 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 15mm 4000lm 930 H ADV8 T	800 mA	1,120 mA	1,232 mA	1,340 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 15mm 4000lm 940 H ADV8 T	800 mA	1,120 mA	1,232 mA	1,340 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 17mm 5000lm 927 R ADV8	900 mA	1,300 mA	1,430 mA	1,560 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 17mm 5000lm 930 R ADV8	900 mA	1,300 mA	1,430 mA	1,560 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 17mm 5000lm 935 R ADV8	900 mA	1,300 mA	1,430 mA	1,560 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 17mm 5000lm 940 R ADV8	900 mA	1,300 mA	1,430 mA	1,560 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 17mm 5000lm 927 H ADV8	900 mA	1,300 mA	1,430 mA	1,560 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 17mm 5000lm 930 H ADV8	900 mA	1,300 mA	1,430 mA	1,560 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 17mm 5000lm 935 H ADV8	900 mA	1,300 mA	1,430 mA	1,560 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 17mm 5000lm 940 H ADV8	900 mA	1,300 mA	1,430 mA	1,560 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 17mm 5000lm 930 H ADV8 T	900 mA	1,300 mA	1,430 mA	1,560 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 17mm 5000lm 935 H ADV8 T	900 mA	1,300 mA	1,430 mA	1,560 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 17mm 5000lm 940 H ADV8 T	900 mA	1,300 mA	1,430 mA	1,560 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 21mm 6000lm 927 R ADV8	1,200 mA	1,960 mA	2,156 mA	2,350 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 21mm 6000lm 930 R ADV8	1,200 mA	1,960 mA	2,156 mA	2,350 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 21mm 6000lm 935 R ADV8	1,200 mA	1,960 mA	2,156 mA	2,350 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 21mm 6000lm 940 R ADV8	1,200 mA	1,960 mA	2,156 mA	2,350 mA / 8ms	60 V	0.5 kV	-30 ... +80 °C	65 °C	105 °C
SLE 21mm 6000lm 927 H ADV8	1,200 mA	1,960 mA	2,156 mA	2,350 mA / 8ms	60 V	0.5 kV	-30...+80 °C	65 °C	105 °C
SLE 21mm 6000lm 930 H ADV8	1,200 mA	1,960 mA	2,156 mA	2,350 mA / 8ms	60 V	0.5 kV	-30...+80 °C	65 °C	105 °C
SLE 21mm 6000lm 935 H ADV8	1,200 mA	1,960 mA	2,156 mA	2,350 mA / 8ms	60 V	0.5 kV	-30...+80 °C	65 °C	105 °C
SLE 21mm 6000lm 940 H ADV8	1,200 mA	1,960 mA	2,156 mA	2,350 mA / 8ms	60 V	0.5 kV	-30...+80 °C	65 °C	105 °C
SLE 21mm 6000lm 930 H ADV8 T	1,200 mA	1,960 mA	2,156 mA	2,350 mA / 8ms	60 V	0.5 kV	-30...+80 °C	65 °C	105 °C
SLE 21mm 6000lm 940 H ADV8 T	1,200 mA	1,960 mA	2,156 mA	2,350 mA / 8ms	60 V	0.5 kV	-30...+80 °C	65 °C	105 °C

[®] If mounted with M4 screws with 7 mm head diameter.

Product description

- Housing for SLE
- Diameter: 35 mm
- Material: Lexan Resin 943
- M3 screws with flat head, max. head diameter of 6 mm and max. torque for fixing is 0.5 Nm




LES9




LES13



LES15

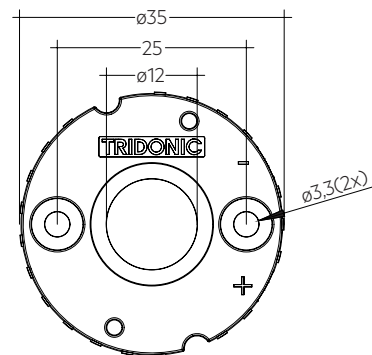

SLE G7 HOUSING LES09

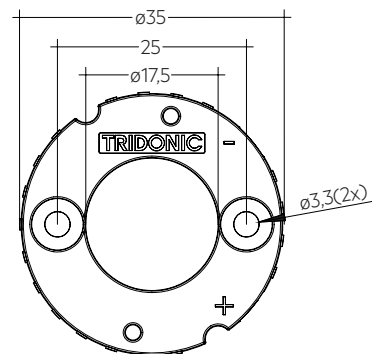

SLE G7 HOUSING LES13/15

Ordering data

Type	Article number	Packaging bag	Weight per pc.
SLE G7 HOUSING LES 09	28003024	500 pc(s).	0.002 kg
SLE G7 HOUSING LES 13/15	28003026	500 pc(s).	0.002 kg

1. Standards

EN 62031

EN 62471

IEC 62717

IEC 61000-4-2

UL 8750 (for CLASS2 circuits and dry locations)

1.1 Glow wire test for housing variants

according to IEC 60695-2-11 with increased temperature of 850 °C passed.

1.2 Photometric code

Key for photometric code, e. g. 830 / 359

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code	CRI	Colour temperature in Kelvin x 100	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)
7	70 – 79	MacAdam initial	(max.6000h)	Code
8	80 – 89			Luminous flux
9	≥90			
				7 ≥ 70 %
				8 ≥ 80 %
				9 ≥ 90 %

1.3 Risk group

Type	Risk group (IEC 62471)
LES04	RG2 (E _{thr} = 1,808 lx, RG1 at d ≥ 1 b d mm)
LES06 (at I _{max})	RG2 (E _{thr} = 1,808 lx, RG1 at d ≥ 610 mm)
LES06 (at I ≤ 300 mA)	RG1
LES09 800lm	RG1
LES09 1200lm 3000K	RG1
LES09 1200lm 4000K (at I _{max})	RG2 (E _{thr} = 1,808 lx, RG1 at d ≥ 770 mm)
LES09 1200lm 4000K (at I ≤ 350 mA)	RG2 (E _{thr} = 1,808 lx, RG1 at d ≥ 620 mm)
LES09 2600lm 2700K (at I _{max})	RG2 (E _{thr} = 1,808 lx, RG1 at d ≥ 830 mm)
LES09 2600lm 2700K (at I ≤ 600 mA)	RG1
LES09 2600lm 3000K (at I _{max})	RG2 (E _{thr} = 1,808 lx, RG1 at d ≥ 850 mm)
LES09 2600lm 3000K (at I ≤ 600 mA)	RG1
LES09 2600lm 3500K (at I _{max})	RG2 (E _{thr} = 1,808 lx, RG1 at d ≥ 870 mm)
LES09 2600lm 3500K (at I ≤ 600 mA)	RG2 (E _{thr} = 1,808 lx, RG1 at d ≥ 710 mm)
LES09 2600lm 4000K (at I _{max})	RG2 (E _{thr} = 1,808 lx, RG1 at d ≥ 870 mm)
LES09 2600lm 4000K (at I ≤ 600 mA)	RG2 (E _{thr} = 1,808 lx, RG1 at d ≥ 720 mm)
LES13	RG1
LES15	RG1
LES17	RG1
LES21	RG1

1.4 Energy classification

Type	Colour temperature	Forward current	Energy classification	Energy consumption
SLE 04mm – Without housing				
SLE 04mm 800lm 930 R ADV8	3,000 K	180 mA	E	7 kWh / 1,000 h
SLE 04mm 800lm 940 R ADV8	4,000 K	180 mA	E	7 kWh / 1,000 h
SLE 06mm – Without housing				
SLE 06mm 1600lm 930 R ADV8	3,000 K	300 mA	E	11 kWh / 1,000 h
SLE 06mm 1600lm 940 R ADV8	4,000 K	300 mA	E	11 kWh / 1,000 h

Type	Colour temperature	Forward current	Energy classification	Energy consumption
SLE 09mm – Without housing				
SLE 09mm 800lm 930 R ADV8	3,000 K	350 mA	E	13 kWh / 1,000 h
SLE 09mm 800lm 935 R ADV8	3,500 K	350 mA	E	13 kWh / 1,000 h
SLE 09mm 800lm 940 R ADV8	4,000 K	350 mA	E	13 kWh / 1,000 h
SLE 09mm 1200lm 927 R ADV8	2,700 K	350 mA	E	12 kWh / 1,000 h
SLE 09mm 1200lm 930 R ADV8	3,000 K	350 mA	E	12 kWh / 1,000 h
SLE 09mm 1200lm 940 R ADV8	4,000 K	350 mA	D	12 kWh / 1,000 h
SLE 09mm 2600lm 927 R ADV8	2,700 K	600 mA	E	21 kWh / 1,000 h
SLE 09mm 2600lm 930 R ADV8	3,000 K	600 mA	E	21 kWh / 1,000 h
SLE 09mm 2600lm 935 R ADV8	3,500 K	600 mA	E	21 kWh / 1,000 h
SLE 09mm 2600lm 940 R ADV8	4,000 K	600 mA	E	21 kWh / 1,000 h
SLE 13mm – Without housing				
SLE 13mm 3000lm 927 R ADV8	2,700 K	500 mA	E	17 kWh / 1,000 h
SLE 13mm 3000lm 930 R ADV8	3,000 K	500 mA	D	17 kWh / 1,000 h
SLE 13mm 3000lm 935 R ADV8	3,500 K	500 mA	D	17 kWh / 1,000 h
SLE 13mm 3000lm 940 R ADV8	4,000 K	500 mA	D	17 kWh / 1,000 h
SLE 15mm – Without housing				
SLE 15mm 4000lm 927 R ADV8	2,700 K	800 mA	E	28 kWh / 1,000 h
SLE 15mm 4000lm 930 R ADV8	3,000 K	800 mA	E	28 kWh / 1,000 h
SLE 15mm 4000lm 935 R ADV8	3,500 K	800 mA	E	28 kWh / 1,000 h
SLE 15mm 4000lm 940 R ADV8	4,000 K	800 mA	D	28 kWh / 1,000 h
SLE 17mm – Without housing				
SLE 17mm 5000lm 927 R ADV8	2,700 K	900 mA	E	31 kWh / 1,000 h
SLE 17mm 5000lm 930 R ADV8	3,000 K	900 mA	D	31 kWh / 1,000 h
SLE 17mm 5000lm 935 R ADV8	3,500 K	900 mA	D	31 kWh / 1,000 h
SLE 17mm 5000lm 940 R ADV8	4,000 K	900 mA	D	31 kWh / 1,000 h
SLE 21mm – Without housing				
SLE 21mm 6000lm 927 R ADV8	2,700 K	1,200 mA	E	41 kWh / 1,000 h
SLE 21mm 6000lm 930 R ADV8	3,000 K	1,200 mA	D	41 kWh / 1,000 h
SLE 21mm 6000lm 935 R ADV8	3,500 K	1,200 mA	D	41 kWh / 1,000 h
SLE 21mm 6000lm 940 R ADV8	4,000 K	1,200 mA	D	41 kWh / 1,000 h
SLE 13mm – With housing				
SLE 13mm 3000lm 927 H ADV8	2,700 K	500 mA	E	17 kWh / 1,000 h
SLE 13mm 3000lm 930 H ADV8	3,000 K	500 mA	E	17 kWh / 1,000 h
SLE 13mm 3000lm 935 H ADV8	3,500 K	500 mA	D	17 kWh / 1,000 h
SLE 13mm 3000lm 940 H ADV8	4,000 K	500 mA	D	17 kWh / 1,000 h
SLE 15mm – With housing				
SLE 15mm 4000lm 930 H ADV8	3,000 K	800 mA	E	28 kWh / 1,000 h
SLE 15mm 4000lm 940 H ADV8	4,000 K	800 mA	D	28 kWh / 1,000 h
SLE 15mm 4000lm 930 H ADV8 T	3,000 K	800 mA	E	28 kWh / 1,000 h
SLE 15mm 4000lm 940 H ADV8 T	4,000 K	800 mA	D	28 kWh / 1,000 h
SLE 17mm – With housing				
SLE 17mm 5000lm 927 H ADV8	2,700 K	900 mA	D	31 kWh / 1,000 h
SLE 17mm 5000lm 930 H ADV8	3,000 K	900 mA	D	31 kWh / 1,000 h
SLE 17mm 5000lm 935 H ADV8	3,500 K	900 mA	D	31 kWh / 1,000 h
SLE 17mm 5000lm 940 H ADV8	4,000 K	900 mA	D	31 kWh / 1,000 h
SLE 17mm 5000lm 930 H ADV8 T	3,000 K	900 mA	D	31 kWh / 1,000 h
SLE 17mm 5000lm 935 H ADV8 T	3,500 K	900 mA	D	31 kWh / 1,000 h
SLE 17mm 5000lm 940 H ADV8 T	4,000 K	900 mA	D	38 kWh / 1,000 h
SLE 21mm – With housing				
SLE 21mm 6000lm 927 H ADV8	2,700 K	1,200 mA	E	41 kWh / 1,000 h
SLE 21mm 6000lm 930 H ADV8	3,000 K	1,200 mA	D	41 kWh / 1,000 h
SLE 21mm 6000lm 935 H ADV8	3,500 K	1,200 mA	D	41 kWh / 1,000 h
SLE 21mm 6000lm 940 H ADV8	4,000 K	1,200 mA	D	41 kWh / 1,000 h
SLE 21mm 6000lm 930 H ADV8 T	3,000 K	1,200 mA	D	41 kWh / 1,000 h
SLE 21mm 6000lm 940 H ADV8 T	4,000 K	1,200 mA	D	41 kWh / 1,000 h

2. Thermal details

2.1 tp point, ambient temperature and lifetime


The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For SLE a tp temperature of 65 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tp point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

To check the tc / tp temperature, the temperature sensor has to be mounted on the PCB at the marked position as stated in the drawing.

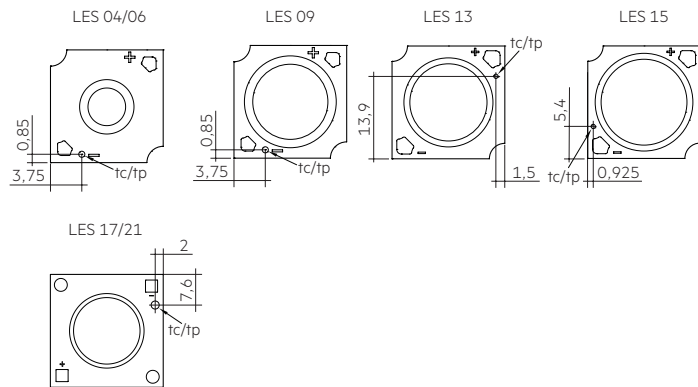

2.2 Storage and humidity

storage temperature	-30 ... +80 °C
---------------------	----------------

Operation only in non condensing environment.

Humidity during processing of the module should be between 0 to 85 %.

2.3 Thermal design and heat sink

The rated life of LED products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the SLE will be greatly reduced or the SLE may be destroyed.

2.4 Heat sink values

SLE 04mm 800lm xxx ADV8

ta	tp	Operating current	R _{th, hs-a}
25 °C	65 °C	150 mA	2.2 K/W
35 °C	65 °C	150 mA	1.7 K/W
45 °C	65 °C	150 mA	1.1 K/W
25 °C	65 °C	180 mA	1.5 K/W
35 °C	65 °C	180 mA	1.1 K/W
45 °C	65 °C	180 mA	0.8 K/W
25 °C	65 °C	200 mA	1.1 K/W
35 °C	65 °C	200 mA	0.9 K/W
45 °C	65 °C	200 mA	0.6 K/W

SLE 06mm 1600lm xxx ADV8

ta	tp	Operating current	R _{th, hs-a}
25 °C	65 °C	150 mA	2.2 K/W
35 °C	65 °C	150 mA	1.7 K/W
45 °C	65 °C	150 mA	1.1 K/W
25 °C	65 °C	180 mA	1.5 K/W
35 °C	65 °C	180 mA	1.1 K/W
45 °C	65 °C	180 mA	0.8 K/W
25 °C	65 °C	200 mA	1.1 K/W
35 °C	65 °C	200 mA	0.9 K/W
45 °C	65 °C	200 mA	0.6 K/W

SLE 09mm 800lm xxx ADV8

ta	tp	Operating current	R _{th, hs-a}
25 °C	65 °C	250 mA	4.8 K/W
35 °C	65 °C	250 mA	3.6 K/W
45 °C	65 °C	250 mA	2.4 K/W
25 °C	65 °C	350 mA	3.1 K/W
35 °C	65 °C	350 mA	2.3 K/W
45 °C	65 °C	350 mA	1.5 K/W
25 °C	65 °C	450 mA	2.3 K/W
35 °C	65 °C	450 mA	1.7 K/W
45 °C	65 °C	450 mA	1.1 K/W

SLE 09mm 1200lm xxx ADV8

ta	tp	Operating current	R _{th, hs-a}
25 °C	65 °C	250 mA	4.6 K/W
35 °C	65 °C	250 mA	3.4 K/W
45 °C	65 °C	250 mA	2.2 K/W
25 °C	65 °C	350 mA	3.1 K/W
35 °C	65 °C	350 mA	2.3 K/W
45 °C	65 °C	350 mA	1.5 K/W
25 °C	65 °C	500 mA	2.1 K/W
35 °C	65 °C	500 mA	1.6 K/W
45 °C	65 °C	500 mA	1.0 K/W

SLE 09mm 2600lm xxx ADV8

ta	tp	Operating current	R _{th, hs-a}
25 °C	65 °C	450 mA	2.2 K/W
35 °C	65 °C	450 mA	1.7 K/W
45 °C	65 °C	450 mA	1.1 K/W
25 °C	65 °C	600 mA	1.5 K/W
35 °C	65 °C	600 mA	1.1 K/W
45 °C	65 °C	600 mA	0.8 K/W
25 °C	65 °C	800 mA	1.1 K/W
35 °C	65 °C	800 mA	0.9 K/W
45 °C	65 °C	800 mA	0.6 K/W

SLE 13mm 3000lm xxx ADV8

ta	tp	Operating current	R _{th, hs-a}
25 °C	65 °C	350 mA	3.4 K/W
35 °C	65 °C	350 mA	2.6 K/W
45 °C	65 °C	350 mA	1.7 K/W
25 °C	65 °C	500 mA	2.3 K/W
35 °C	65 °C	500 mA	1.7 K/W
45 °C	65 °C	500 mA	1.2 K/W
25 °C	65 °C	900 mA	1.2 K/W
35 °C	65 °C	900 mA	0.9 K/W
45 °C	65 °C	900 mA	0.6 K/W

SLE 15mm 4000lm xxx ADV8

ta	tp	Operating current	R _{th, hs-a}
25 °C	65 °C	400 mA	2.4 K/W
35 °C	65 °C	400 mA	1.8 K/W
45 °C	65 °C	400 mA	1.2 K/W
25 °C	65 °C	800 mA	1.3 K/W
35 °C	65 °C	800 mA	1.0 K/W
45 °C	65 °C	800 mA	0.6 K/W
25 °C	65 °C	1,050 mA	0.9 K/W
35 °C	65 °C	1,050 mA	0.7 K/W
45 °C	65 °C	1,050 mA	0.5 K/W

SLE 17mm 5000lm xxx ADV8

ta	tp	Operating current	R _{th, hs-a}
25 °C	65 °C	450 mA	2.3 K/W
35 °C	65 °C	450 mA	1.7 K/W
45 °C	65 °C	450 mA	1.1 K/W
25 °C	65 °C	900 mA	1.0 K/W
35 °C	65 °C	900 mA	0.7 K/W
45 °C	65 °C	900 mA	0.4 K/W
25 °C	65 °C	1,200 mA	0.7 K/W
35 °C	65 °C	1,200 mA	0.5 K/W
45 °C	65 °C	1,200 mA	0.3 K/W

SLE 21mm 6000lm xxx ADV8

ta	tp	Operating current	R _{th, hs-a}
25 °C	65 °C	700 mA	1.6 K/W
35 °C	65 °C	700 mA	1.2 K/W
45 °C	65 °C	700 mA	0.8 K/W
25 °C	65 °C	1,200 mA	0.7 K/W
35 °C	65 °C	1,200 mA	0.5 K/W
45 °C	65 °C	1,200 mA	0.3 K/W
25 °C	65 °C	1,800 mA	0.5 K/W
35 °C	65 °C	1,800 mA	0.3 K/W
45 °C	65 °C	1,800 mA	0.2 K/W

Notes

The actual cooling can differ because of the material, the structural shape, outside influences and the installation situation. A thermal connection between SLE and heat sink with heat-conducting paste or heat conducting adhesive film is absolutely necessary.

Additionally the SLE has to be fixed on the heat sink with M3 screws to optimise the thermal connection.

Use of thermal interface material with thermal conductivity of $\lambda > 1 \text{ W/mK}$ and layer thickness of interface material with max. 50 μm or a similar interface material where the quotient of layer thickness and thermal conductivity $b < 50 \text{ } \mu\text{mmK/W}$.

The SLE H ADV8 T modules will be delivered with thermal interface foil of type GRAFTECH HT-1205A.

The bottom side of the thermal pad is glued to the module, the upper side is not adhesive. This makes it easier to position the module when it is connected to the heat sink.



The thermal pad is an integral part of the LED module and must not be confused with a protective foil. The thermal pad must not be pulled off!

For further information about the thermal interface foil please refer to the data sheet of the product GRAFTECH HT-1205A.

3. Installation / wiring

3.1 Electrical supply/choice of LED driver

SLE from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED drivers from Tridonic in combination with SLE guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection



SLE must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module. Wrong polarity can damage the SLE.



SLE must not be operated with nonSELV LED driver.




SLE are basic insulated up to 60 V SELV against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED driver (also against earth) is above 60 V SELV, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction.

At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed.


This is typically achieved by means of a non removable light distributor over the module.

3.2 Wiring

Wiring with housing (LES13 and LES15)

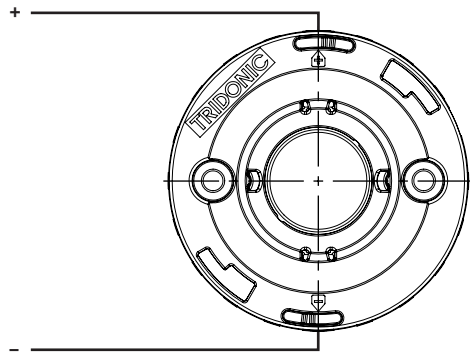


Wiring with housing (LES17 and LES21)

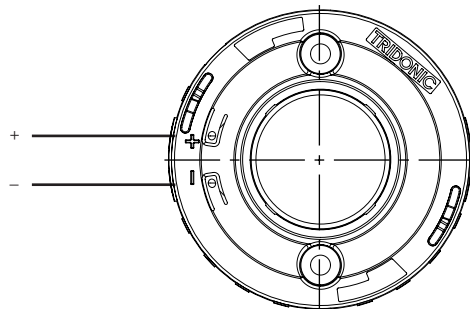


Wiring without housing


LES04 + LES06 + LES09 + LES13 + LES15



LES17 + LES21



Wiring example

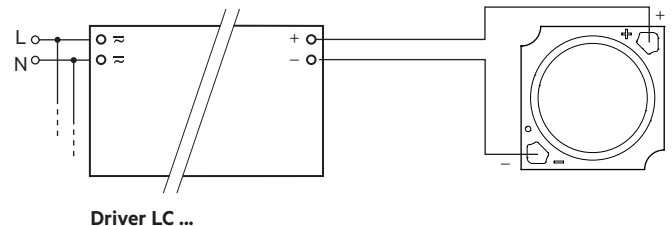


3.3 Wiring type and cross section for housing variants

For wiring use solid wire from 0.5 to 0.75 mm² or stranded wire with soldered ends of 0.5 mm².

For the push-wire connection you have to strip the insulation (6 – 7 mm).

Loosen wire through twisting and pulling.

wire preparation:



3.4 Mounting instruction



SLE from Tridonic which have to be installed on a heat sink have to be connected with heat-conducting paste or heat conducting adhesive film and fixed with M3 screws.

The fixing/cooling surface must be cleaned by removing all dirt, dust and grease before installing the LED modules.

None of the components of the SLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.



Max. torque for fixing: 0.3 Nm (LES9, LES13, LES15)
0.5 Nm (LES17, LES21)

The LED modules are mounted with 2 screws per module. In order not to damage the modules only rounded head screws and an additional plastic flat washer (notice working temperature) or rounded head screw with collar (ISO 7380-2) with head diameter ≤ 6.9 mm must be used for LED modules without housing (for LES13, LES15).

Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.



Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.

3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice.

For further information for EOS/ESD safety guidelines and the ESD classification please refer to the brochure entitled <http://www.tridonic.com/esd-protection>.

4. Lifetime

4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value. L70 means that the LED module will give 70 % of its initial luminous flux. This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules. The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.

In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

4.2 Lumen maintenance

Lifetime declarations are informative and represent no warranty claim. Preliminary calculated lifetime data until LM80 test reports are available

SLE 04mm 800lm ADV8

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
150 mA	65 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	9k h	14k h	20k h	31k h	33k h	50k h
180 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	36k h	38k h	>60k h	>60k h	>60k h	>60k h
200 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	36k h	38k h	>60k h	>60k h	>60k h	>60k h

SLE 06mm 1600lm ADV8

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
180 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	22k h	41k h	51k h	>60k h	>60k h
300 mA	65 °C	>57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	9k h	14k h	>20k h	31k h	33k h	50k h
400 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	36k h	38k h	>60k h	>60k h	>60k h	>60k h

SLE 09mm 800lm ADV8

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
250 mA	65 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	9k h	14k h	20k h	31k h	20k h	33k h
350 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	36k h	>38k h	>60k h	>60k h	>60k h	>60k h
450 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	36k h	38k h	>60k h	>60k h	>60k h	>60k h

SLE 09mm 1200lm ADV8

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
250 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	22k h	10k h	51k h	>60k h	>60k h
350 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	>22k h	41k h	51k h	>60k h	>60k h
500 mA	65 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	9k h	14k h	20k h	31k h	33k h	50k h

SLE 09mm 2600lm ADV8

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
450 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	22k h	41k h	51k h	>60k h	>60k h
600 mA	65 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	9k h	14k h	20k h	31k h	33k h	50k h
800 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	36k h	38k h	>60k h	>60k h	>60k h	>60k h

SLE 13mm 3000lm ADV8

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
350 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	22k h	41k h	51k h	>60k h	>60k h
500 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	22k h	41k h	51k h	33k h	50k h
900 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	36k h	38k h	>60k h	>60k h	>60k h	>60k h

SLE 15mm 4000lm ADV8

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
400 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	22k h	41k h	51k h	>60 kh	>60k h
800 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	22k h	41k h	51k h	>60 kh	50k h
1,050 mA	65 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	9k h	14k h	20k h	31k h	33k h	50k h

SLE 17mm 5000lm ADV8

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
450 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	22k h	41k h	51k h	>60k h	>60k h
900 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	22k h	41k h	51k h	>60k h	50k h
1,200 mA	65 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	9k h	14k h	20k h	31k h	33k h	50k h

SLE 21mm 6000lm ADV8

Operating current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
450 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	22k h	41k h	51k h	>60k h	>60k h
900 mA	65 °C	>60k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	18k h	22k h	41k h	51k h	>60k h	50k h
1,200 mA	65 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	85 °C	57k h	>60k h	>60k h	>60k h	>60k h	>60k h
	105 °C	9k h	14k h	20k h	31k h	33k h	50k h

5. Electrical values

5.1 Declaration of electrical parameters

I_{rated} ... Nominal operating current the module is designed for.


I_{max} ... Max. permissible continuous operating current incl. The tolerances of the LED driver.

Max. permissible LF current ripple ... Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.


Max. permissible peak current ... The max. output peak current of the LED driver must not exceed this value.

5.2 Typ. forward voltage vs. forward current


SLE 04mm 800lm ADV8

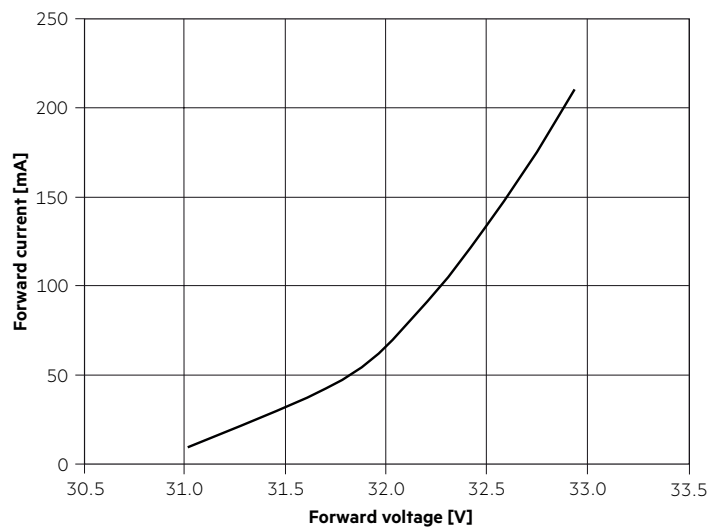


SLE 06mm 1600lm ADV8

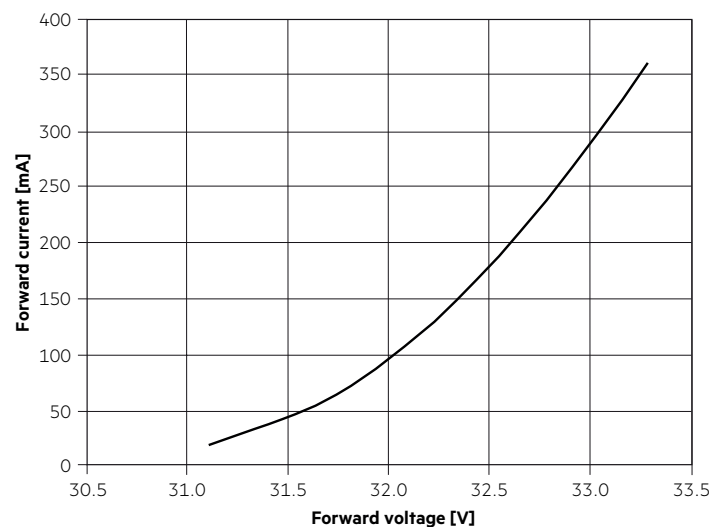


SLE 09mm 800lm ADV8

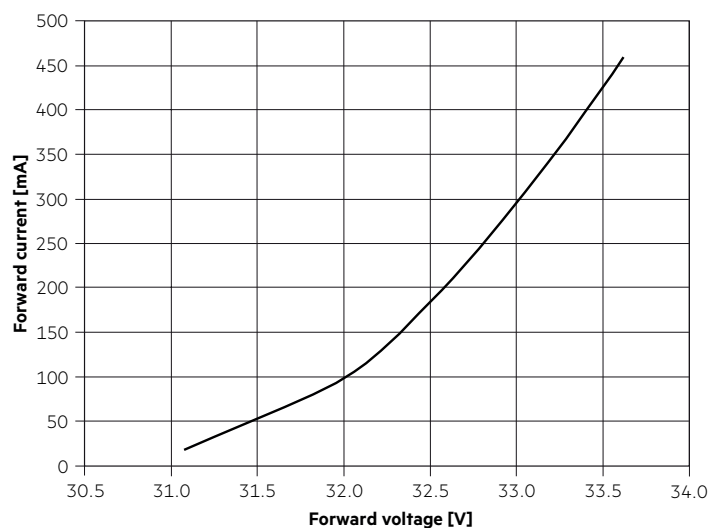


SLE 09mm 1200lm ADV8

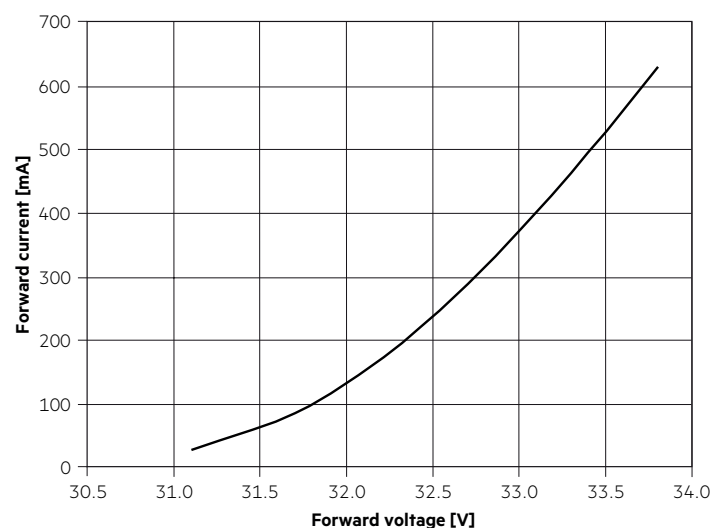


SLE 09mm 2600lm ADV8

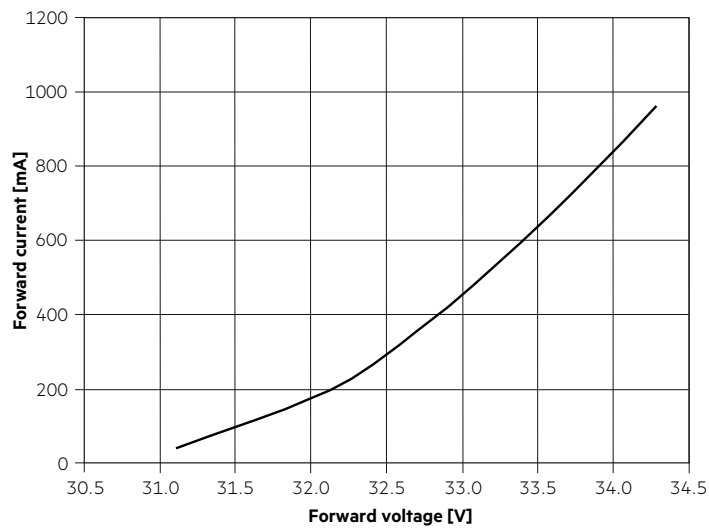


SLE 13mm 3000lm ADV8

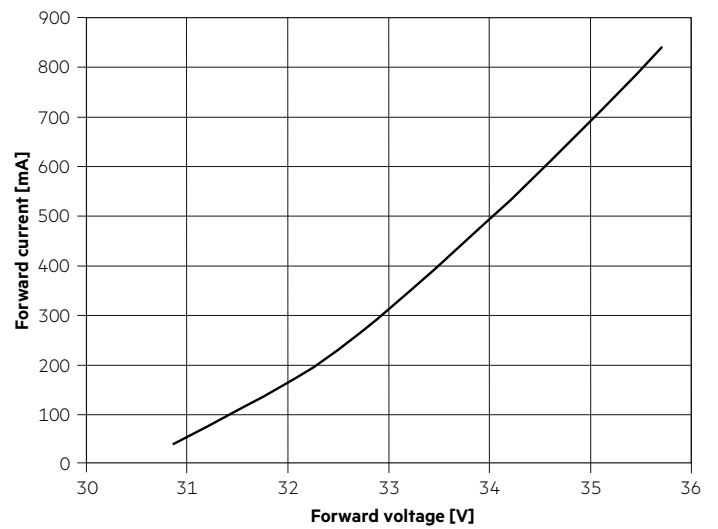


SLE 15mm 4000lm ADV8

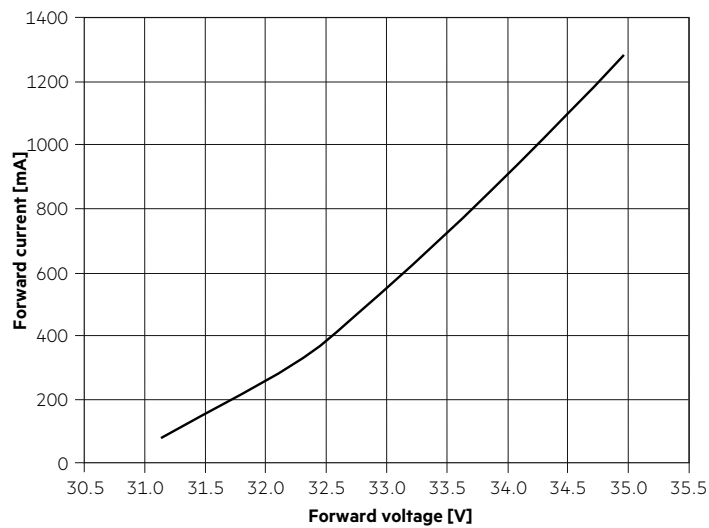

SLE 17mm 5000lm ADV8

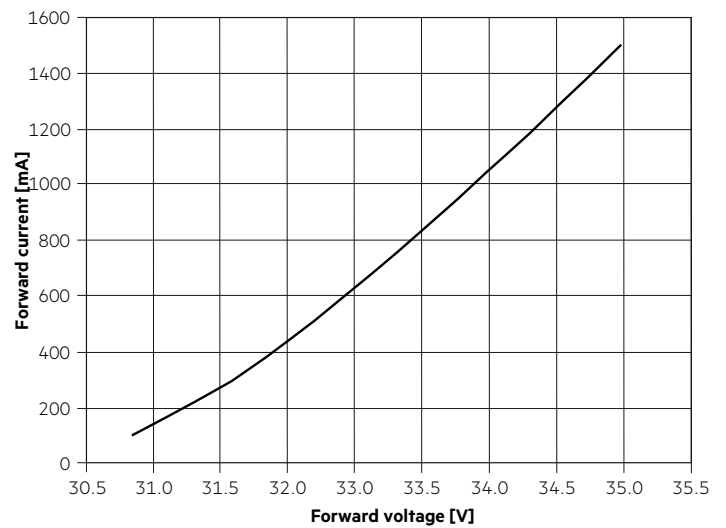


SLE 21mm 6000lm ADV8

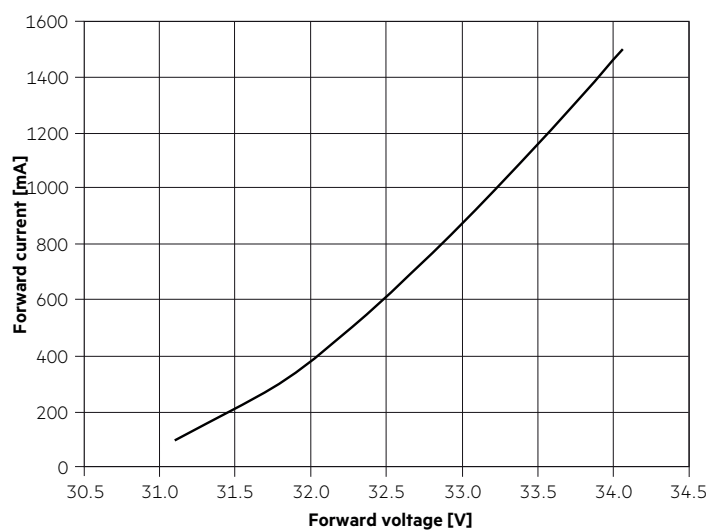


5.3 Forward voltage vs. tp temperature


SLE 04mm 800lm ADV8

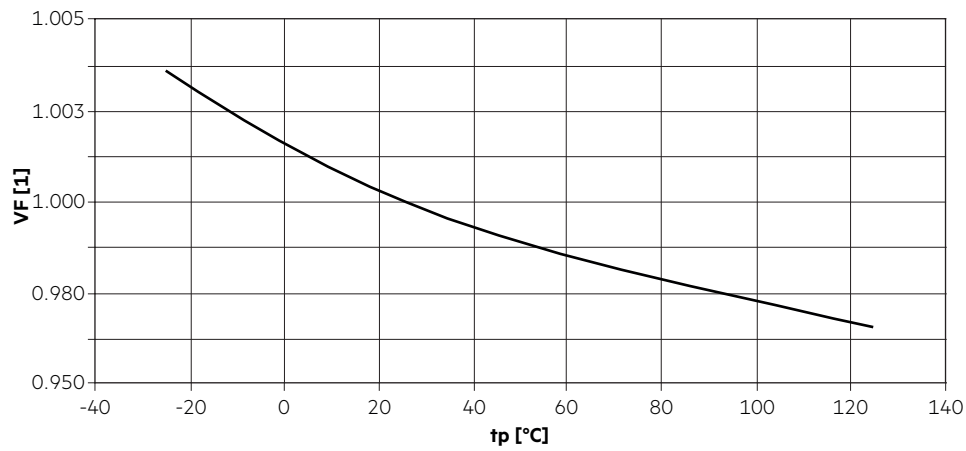


SLE 06mm 1600lm ADV8

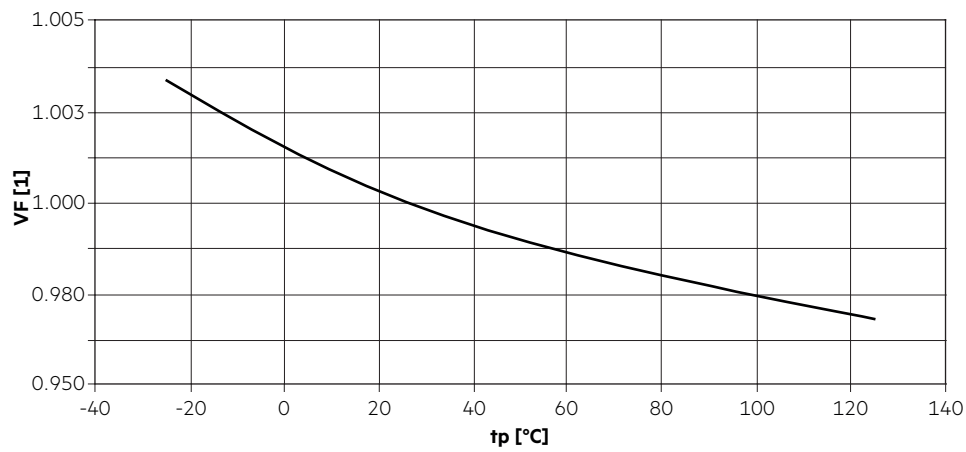


SLE 09mm 800lm ADV8

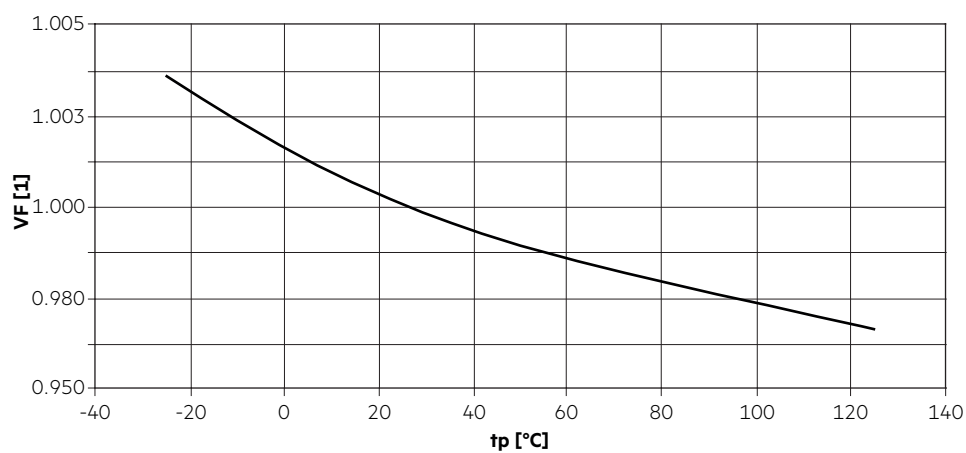


SLE 09mm 1200lm ADV8

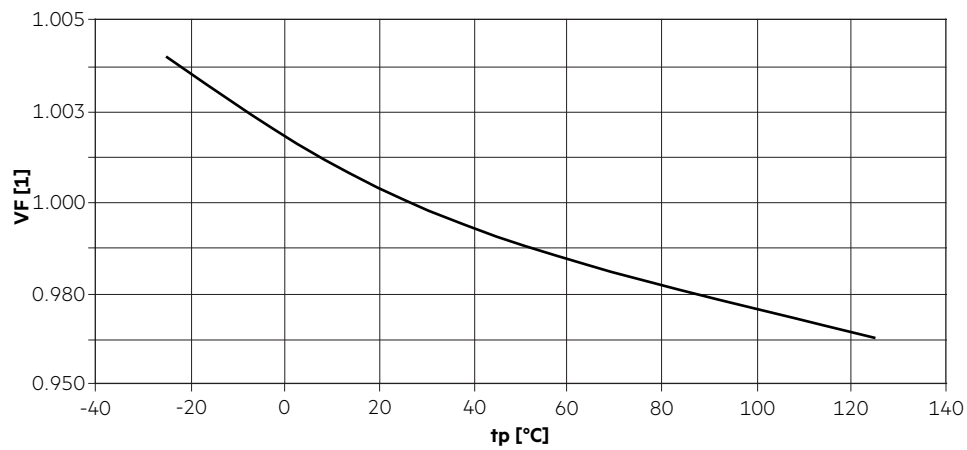


SLE 09mm 2600lm ADV8

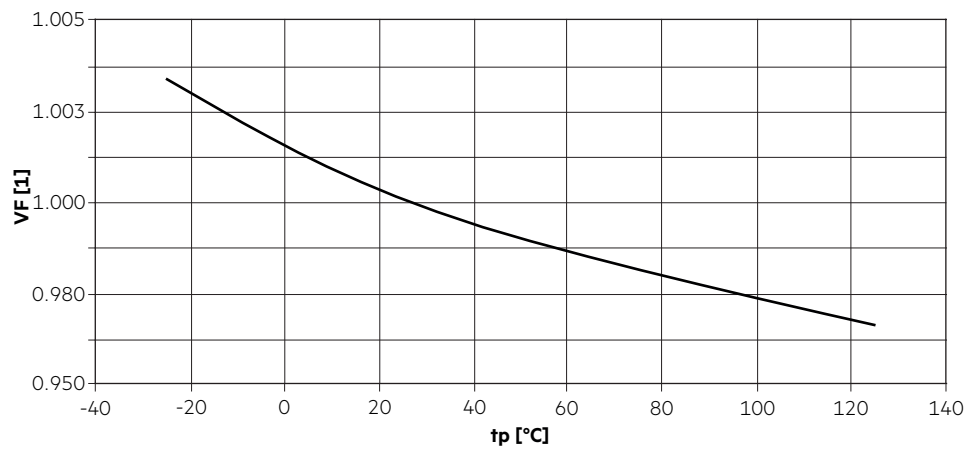


SLE 13mm 3000lm ADV8

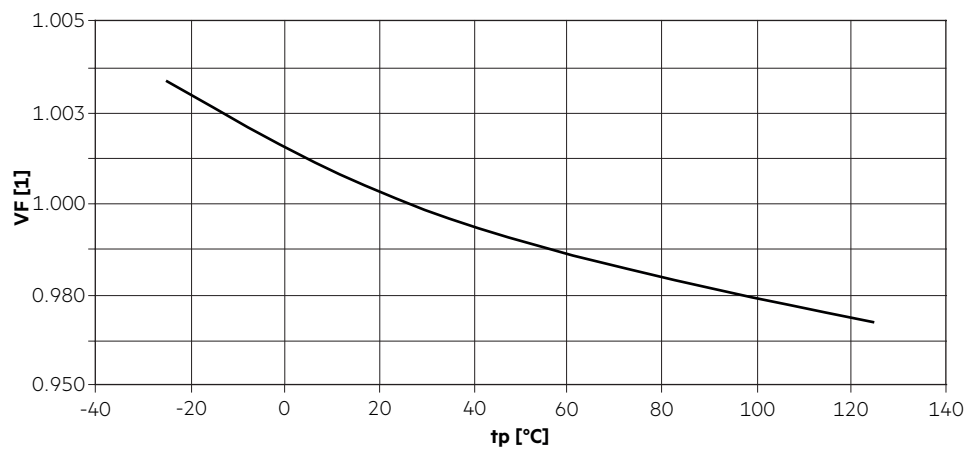


SLE 15mm 4000lm ADV8

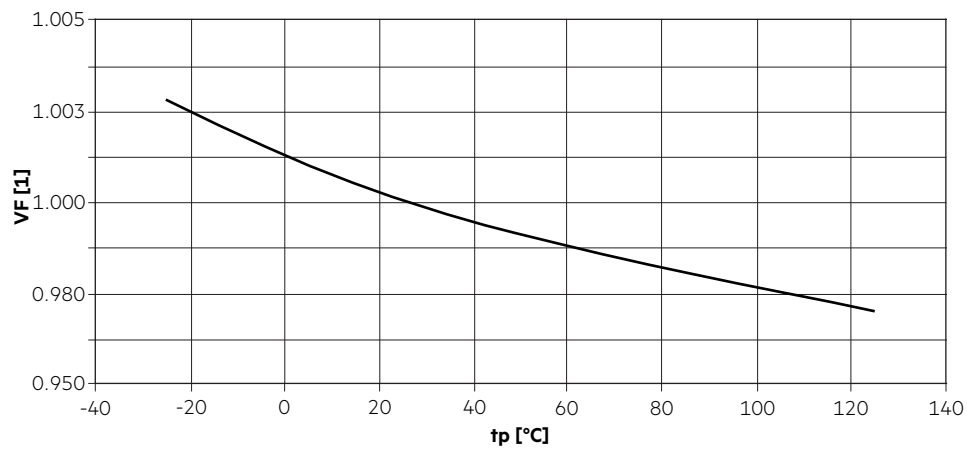

SLE 17mm 5000lm ADV8

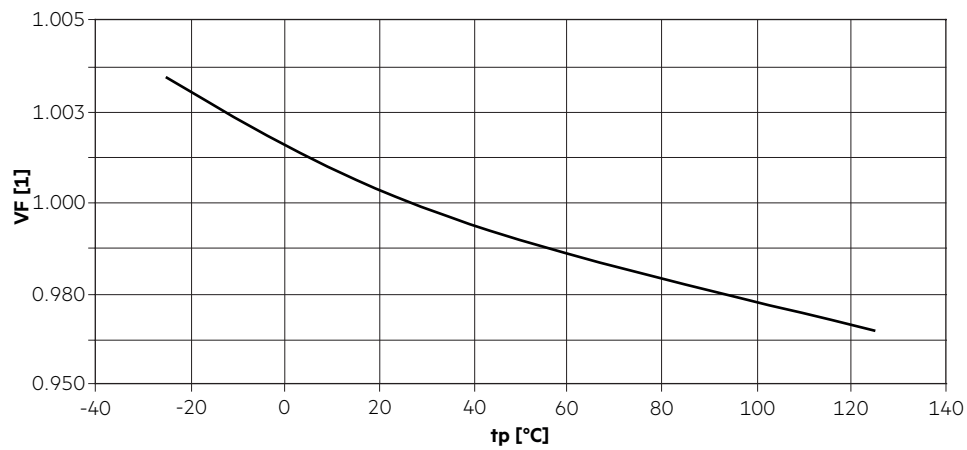

SLE 21mm 6000lm ADV8

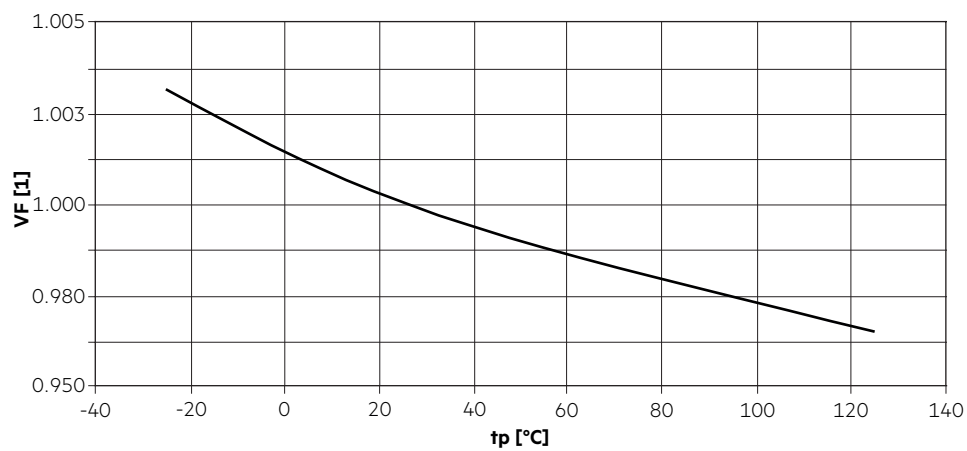

The diagrams based on statistic values.
The real values can be different.

6. Photometric characteristics


6.1 Coordinates and tolerances according to CIE 1931 and colour rendering

The specified colour coordinates are measured integral after a settling time of 100 ms. The current impuls depends on the module type. The ambient temperature of the measurement is $t_a = 25^\circ\text{C}$. The measurement tolerance of the colour coordinates are ± 0.005 .

Module type	Current impulse
SLE 04mm 800lm xxx ADV8	180 mA
SLE 06mm 1600lm xxx ADV8	300 mA
SLE 09mm 800 / 1200lm xxx ADV8	350 mA
SLE 09mm 2600lm xxx ADV8	600 mA
SLE 13mm 3000lm xxx ADV8	500 mA
SLE 15mm 4000lm xxx ADV8	800 mA
SLE 17mm 5000lm xxx ADV8	900 mA
SLE 21mm 6000lm xxx ADV8	1,200 mA


2,700 K – CRI90

	x0	y0
Centre	0.4599	0.4106

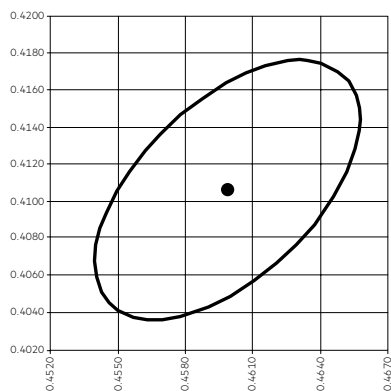


MacAdam ellipse: 3SDCM

CRI	
Ra	R9
93	62

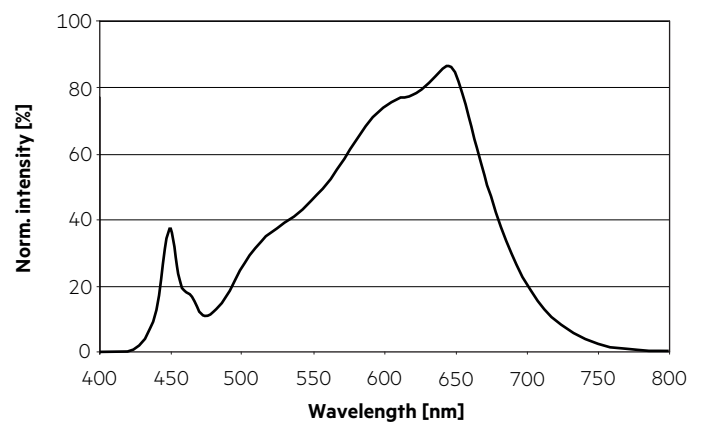


Colour vector graphic

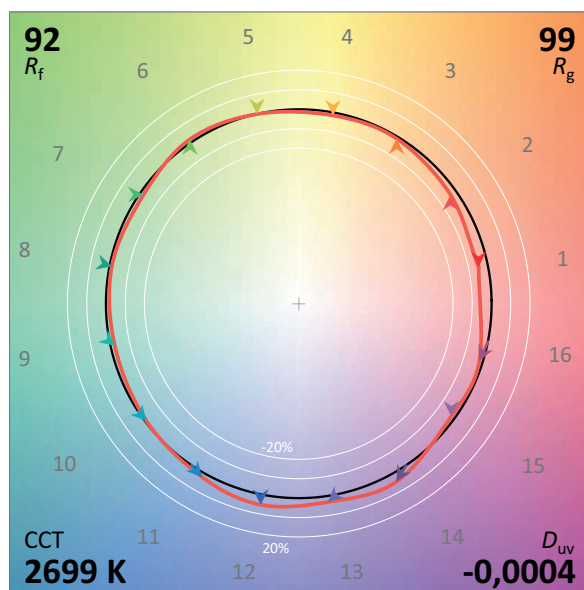

— Reference source
— Test source


3,000 K – CRI90

	x0	y0
Centre	0.4369	0.4041

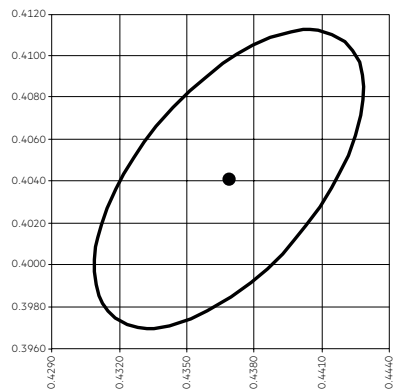


MacAdam ellipse: 3SDCM

CRI	
Ra	R9
92	64

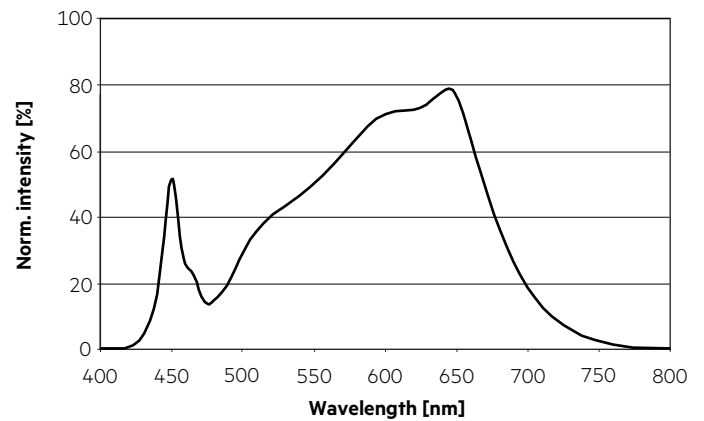


Colour vector graphic

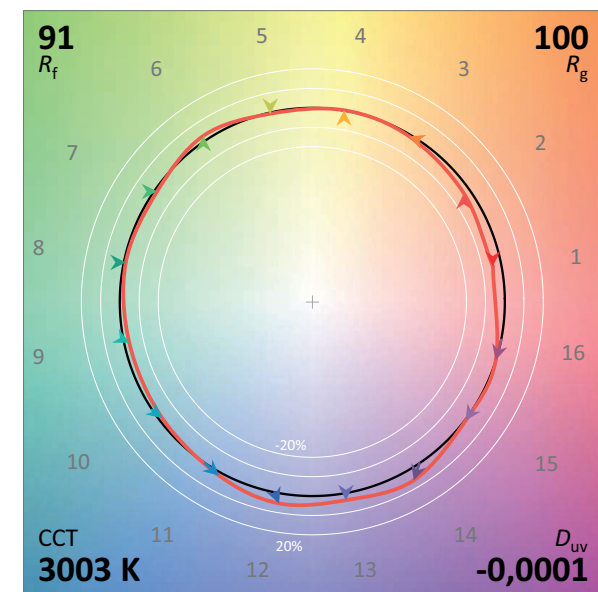

— Reference source
— Test source


3,500 K – CRI90

	x0	y0
Centre	0.4053	0.3907

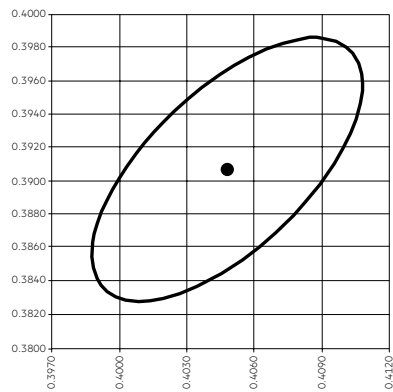


MacAdam ellipse: 3SDCM

CRI	
Ra	R9
93	70

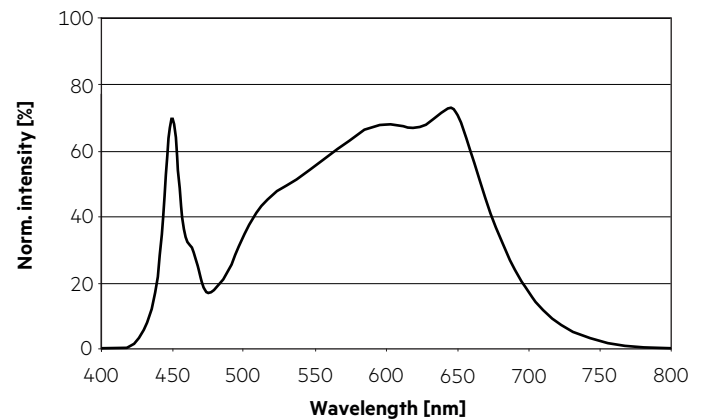


Colour vector graphic

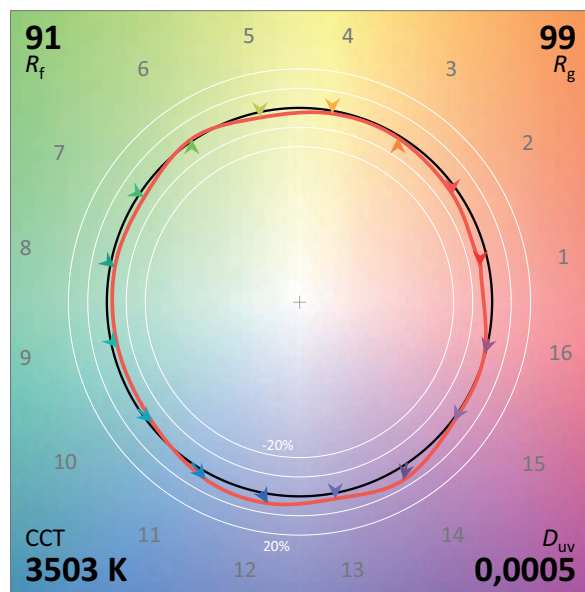

— Reference source
— Test source


4,000 K – CRI90

	x0	y0
Centre	0.3804	0.3767

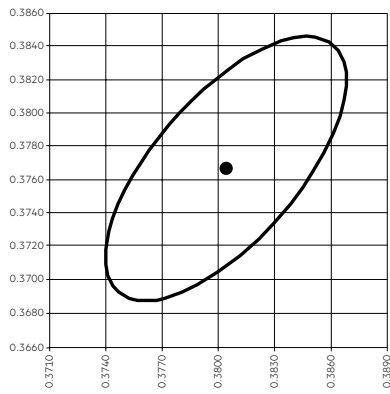


MacAdam ellipse: 3SDCM

CRI	
Ra	R9
93	72

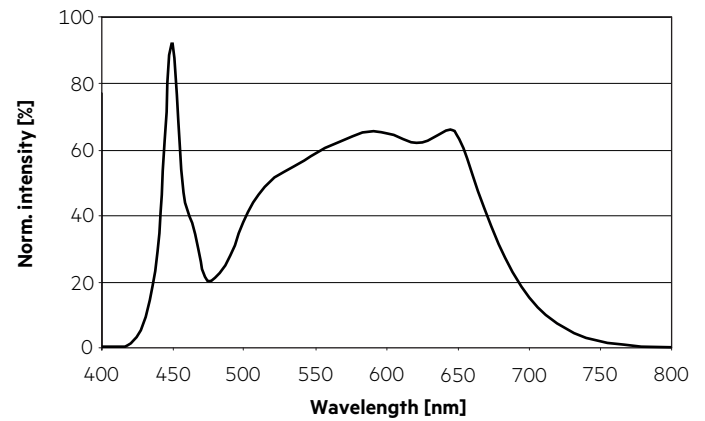


Colour vector graphic

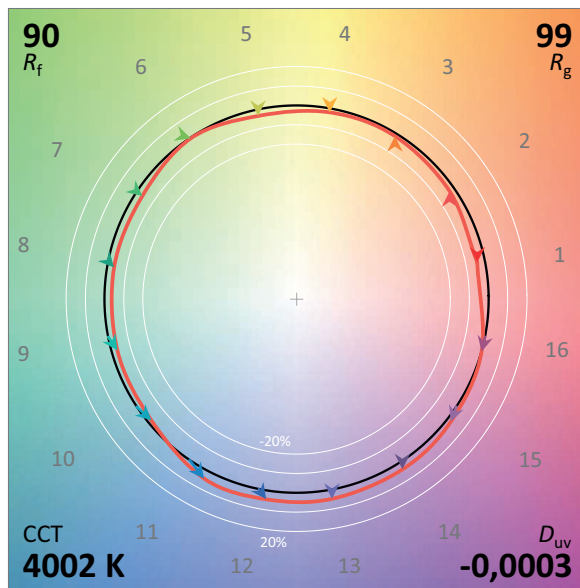

— Reference source
— Test source


6.2 Light distribution

The optical design of the SLE product line ensures optimum homogeneity for the light distribution.

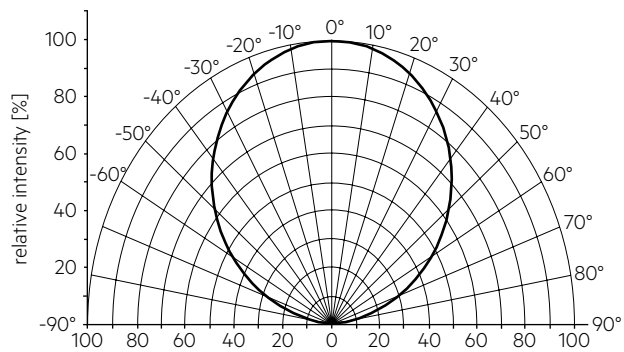


6.3 Relative luminous flux vs. tp temperature


SLE 04mm 800lm ADV8

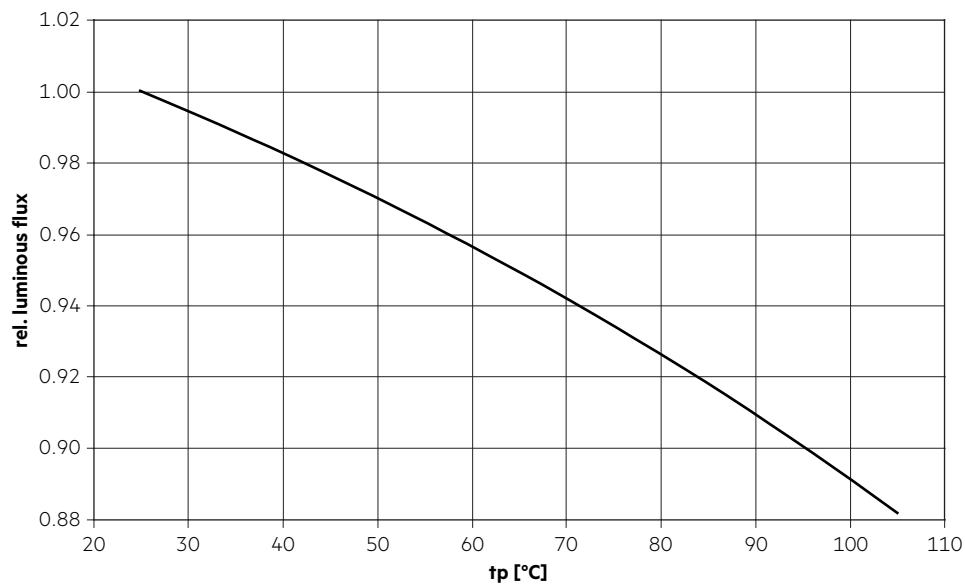


SLE 06mm 1600lm ADV8

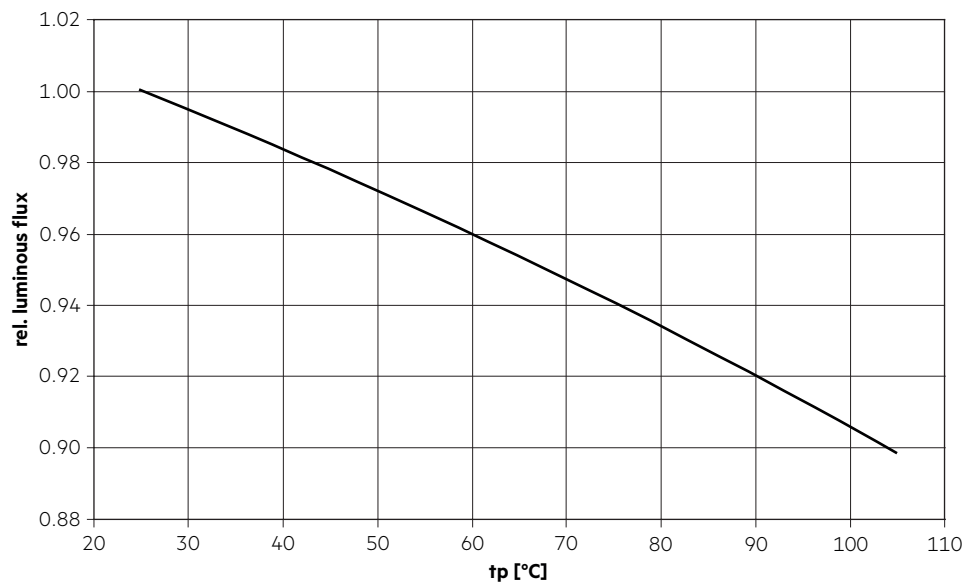


SLE 09mm 800lm ADV8

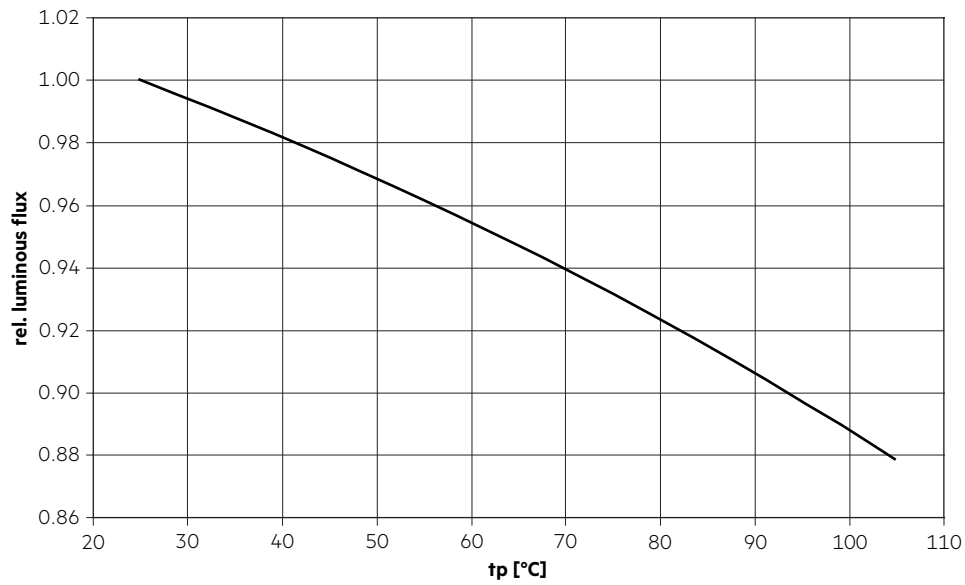


SLE 09mm 1200lm ADV8

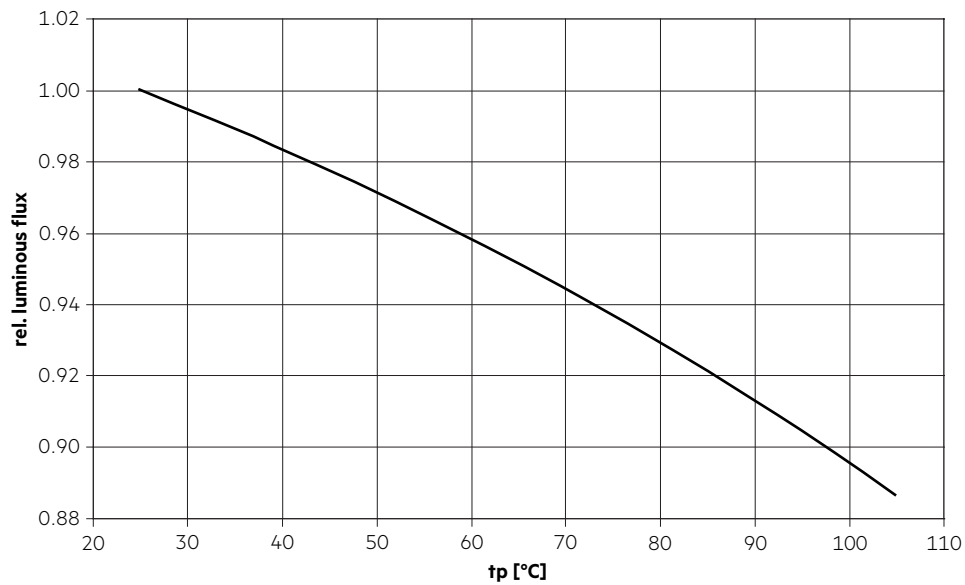


SLE 09mm 2600lm ADV8

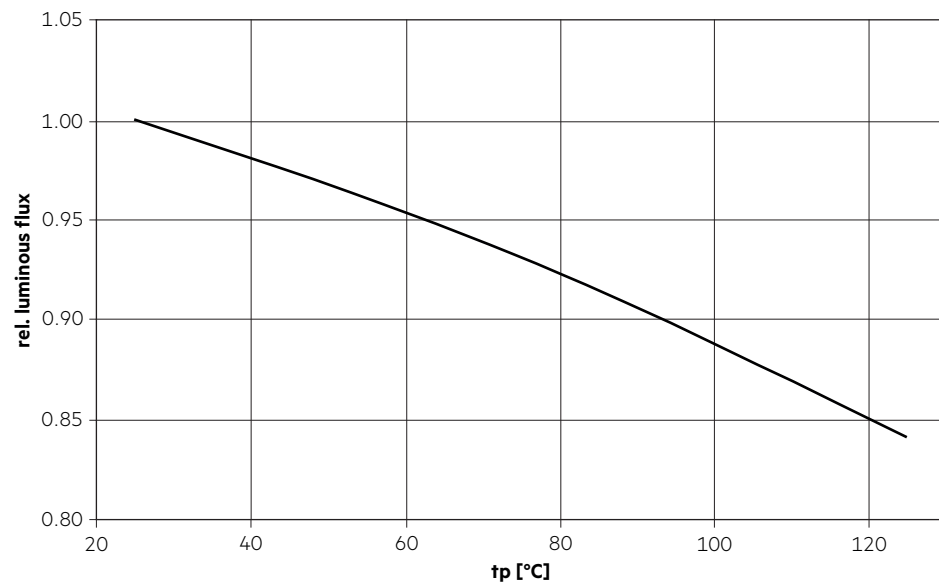


SLE 13mm 3000lm ADV8

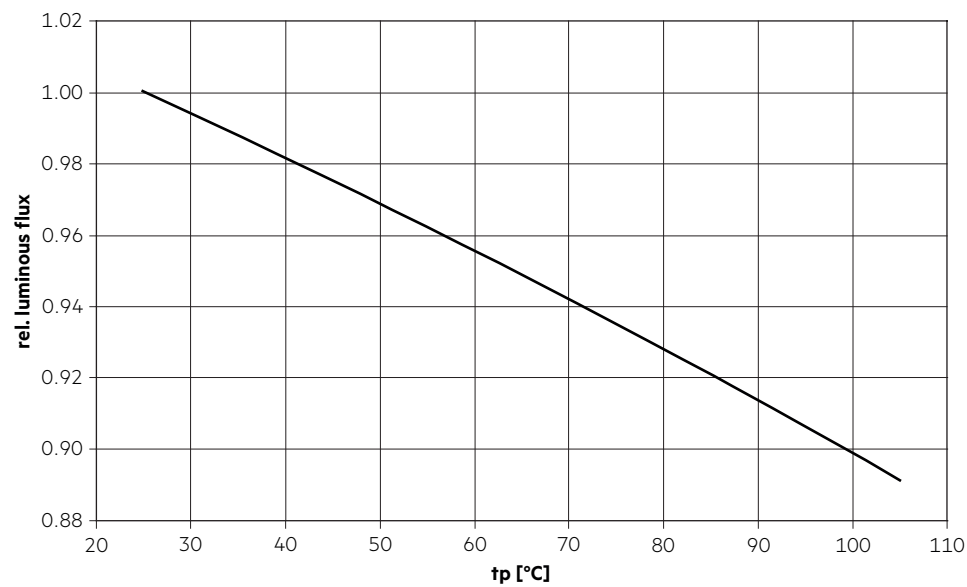


SLE 15mm 4000lm ADV8

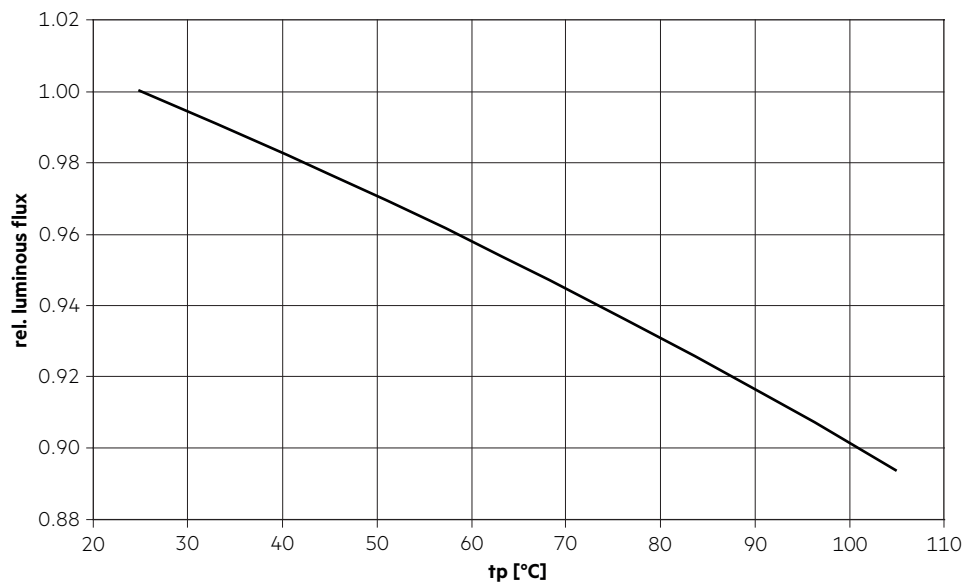

SLE 17mm 5000lm ADV8

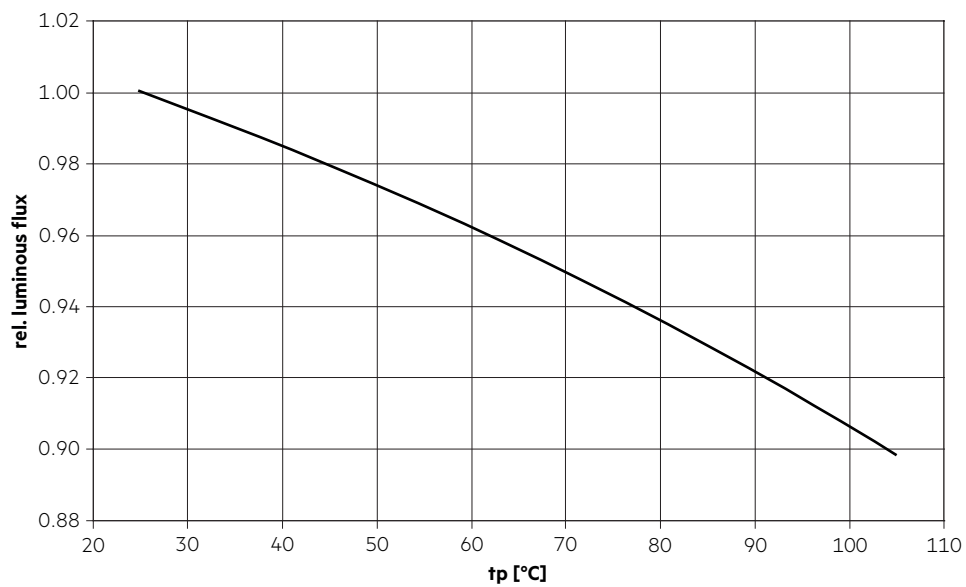


SLE 21mm 6000lm ADV8

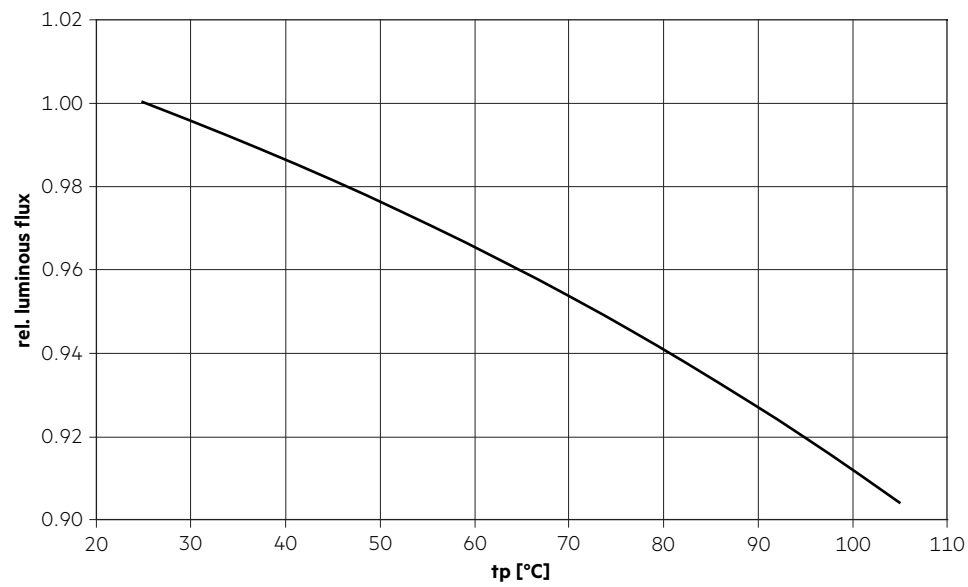


6.4 Relative luminous flux vs. operating current


SLE 04mm 800lm ADV8

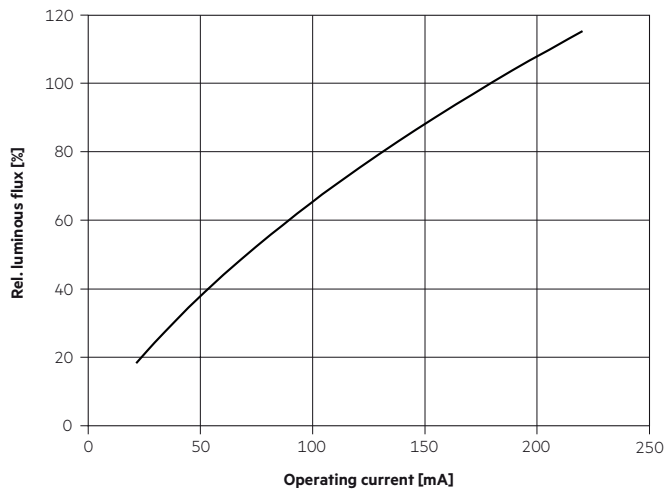


SLE 06mm 1600lm ADV8

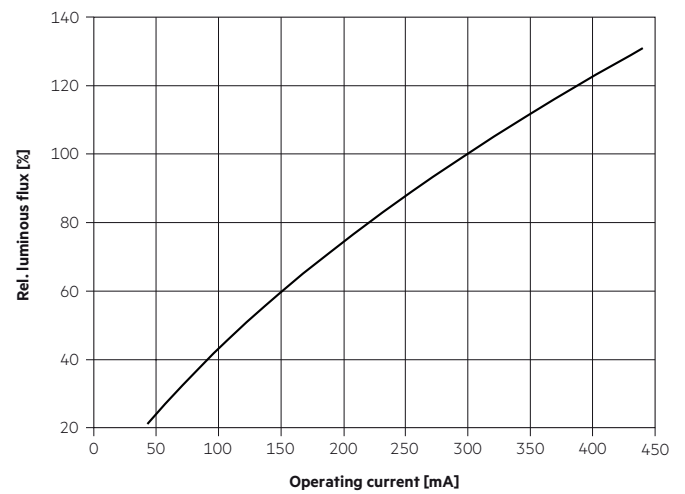


SLE 09mm 800lm ADV8

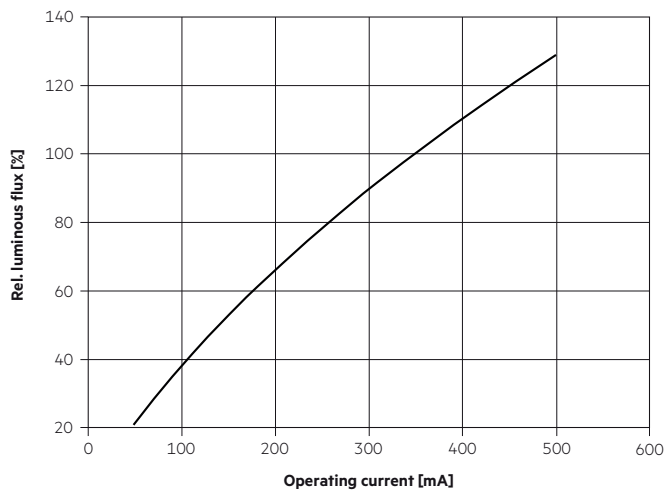


SLE 09mm 1200lm ADV8

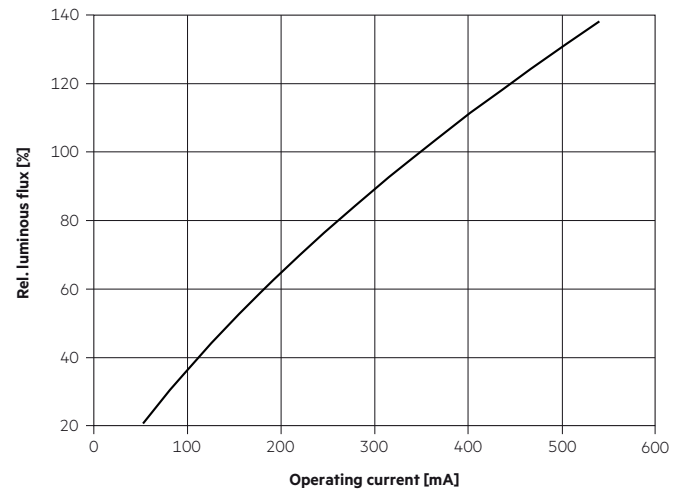


SLE 09mm 2600lm ADV8

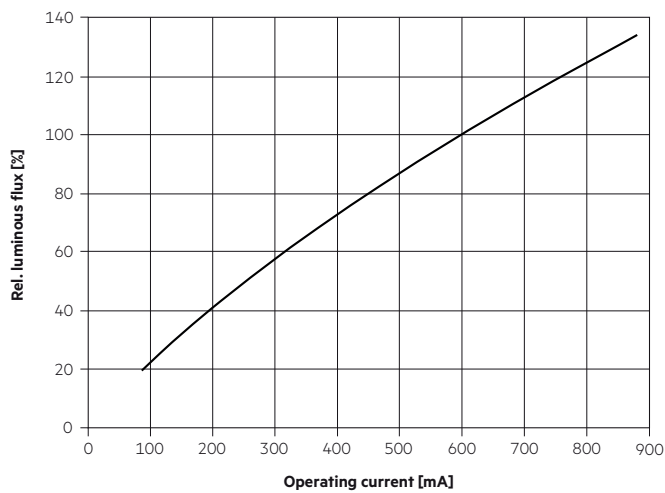


SLE 13mm 3000lm ADV8

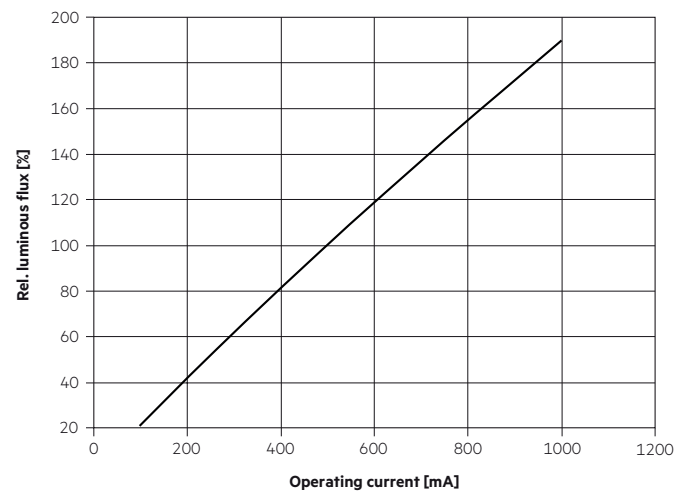


SLE 15mm 4000lm ADV8

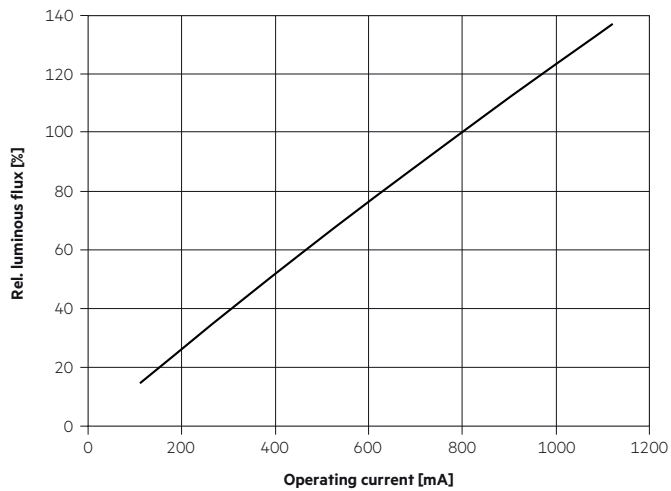

SLE 17mm 5000lm ADV8

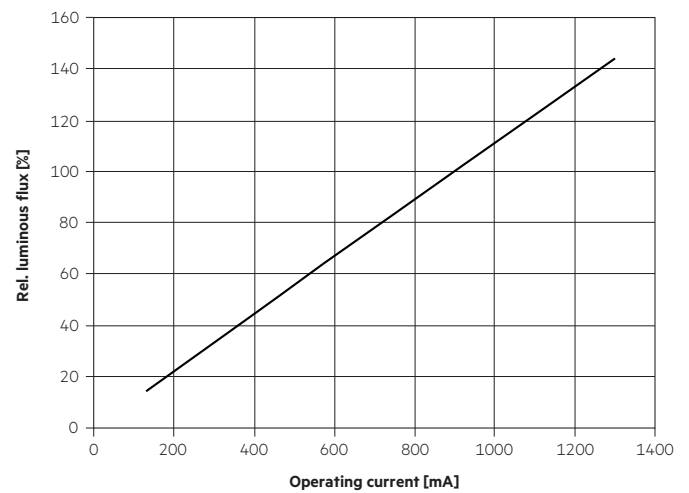

SLE 21mm 6000lm ADV8

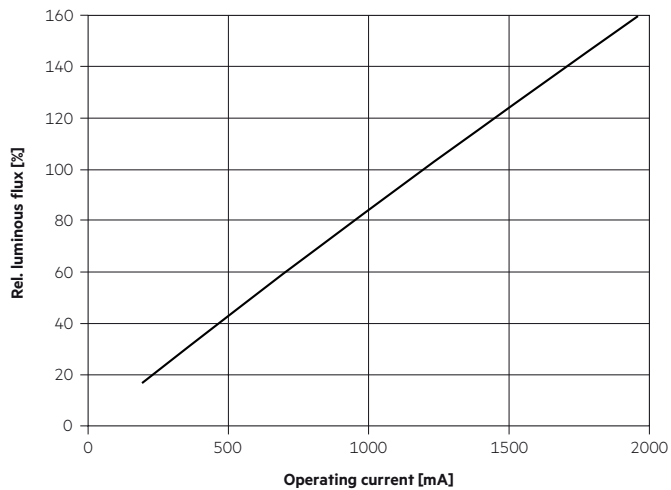

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

Guarantee conditions at www.tridonic.com → Services

Lifetime declarations are informative and represent no warranty claim.